



HON HAI PRECISION IND. CO., LTD.  
No.2, 2nd Dong Huan Road, 10th  
YouSong Industrial District, Longhua  
Town, Baoan, ShenZhen

<h1>User Manual</h1> <h2>WiFi+ BT Module</h2>
---

Project Name	WiFi+ BT Module
Approval Sheet Rev.	1.0
Foxconn Part No.	J20H064

Prepared by	Reviewed by	Approved by
Shu-yu Li	Xue-dong Jiang	



# **CONTENTS**

<b>1</b>	<b>PRODUCT INTRODUCTION</b>	<b>3</b>
1.1	APPLICATION SCOPE	3
<b>2</b>	<b>MODULE HARDWARE OVERVIEW</b>	<b>4</b>
2.1	BLOCK DIAGRAM	4
2.2	FEATURES	4
2.3	INTERFACE AND CONNECTOR	4
<b>3</b>	<b>ELECTRICAL SPECIFICATION</b>	<b>6</b>
3.1	ABSOLUTE MAXIMUM RATING	6
3.2	RECOMMENDED OPERATING RATING	6
3.3	DC CHARACTERISTICS	6
3.4	ESD INFORMATION	6
3.5	ENVIRONMENT STORAGE CONDITION	6
<b>4</b>	<b>RF SPECIFICATION</b>	<b>7</b>
4.1	IEEE802.11B	7
4.2	IEEE802.11G	8
4.3	802.11N HT20	9
4.4	BLUETOOTH STANDARD SPECIFICATIONS	9
<b>5</b>	<b>MECHANICAL SPECIFICATIONS</b>	<b>13</b>
5.1	SHIELDING COVER DIMENSION	13
5.2	PCB ASSEMBLY DIMENSION	14



## **1 Product Introduction**

The J20H064 802.11b/g/n+Bluetooth4.0 module provides wireless modem functionality utilizing direct sequence spread spectrum and OFDM/CCK technology. This module is based on Marvell 88W8766P solution which is integrated 2.4GHz IEEE802.11 b/g/n (MAC/baseband/radio), Bluetooth 4.0 + High speed and power amplifiers (PA).


### **1.1 Application scope**

The wireless LAN is compliant to IEEE 802.11b and IEEE 802.11g and IEEE 802.11n standard. The data rate of 802.11b is up to 11Mbps and fallback rates of 5.5, 2, 1Mbps. The data rate of 802.11g is up to 54Mbps and fallback rates of 48,36,24,18,12,9, 6Mbps. The data rate of 802.11n HT20 is up to 65Mbps and fallback rates of 58.5, 52, 39, 26, 19.5, 13, 6.5Mbps;

## 2 Module Hardware Overview

### 2.1 Block Diagram

The general HW architecture is shown below Figure:

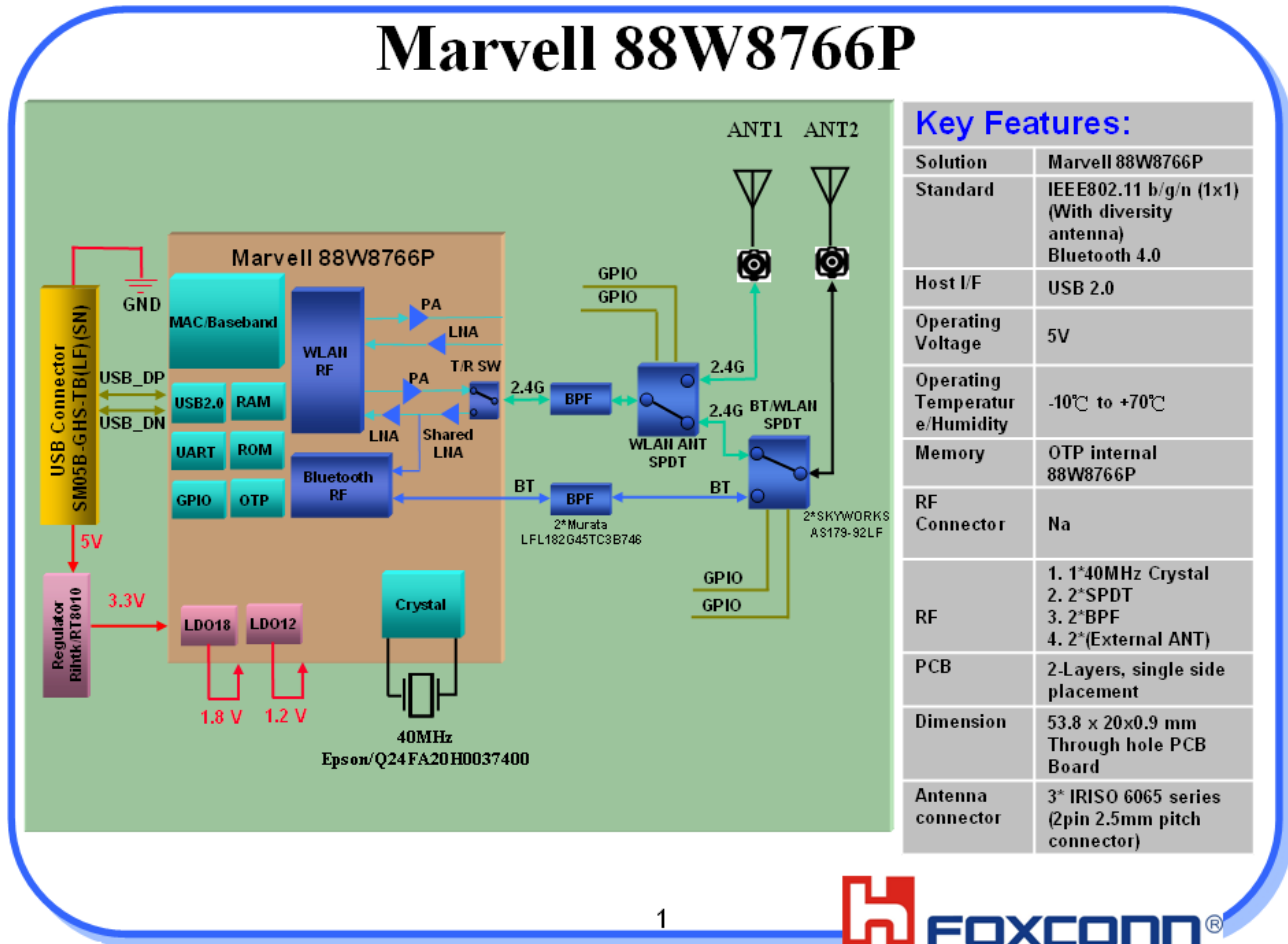

1


Module Block Diagram

### 2.2 Features

- ◆ IEEE802.11b/g/n (1X1) and Bluetooth 4.0 based on Marvell 88W8766P solution.
- ◆ USB 2.0 Interface, High and Full Speeds supported.
- ◆ Module is powered by the host with a 5.0V +/- 5% supply.
- ◆ External PCB printed antennas.
- ◆ Two SPDT switch for antenna diversity and Bluetooth function.
- ◆ 2 layers single side design, through hole PCB design with halogen free FR4 material

### 2.3 Interface and Connector

- ◆ Pin definition:
- ◆ Vendor: JST
- ◆ Vendor P/N: SM05B-GHS-TB(LF)(SN)

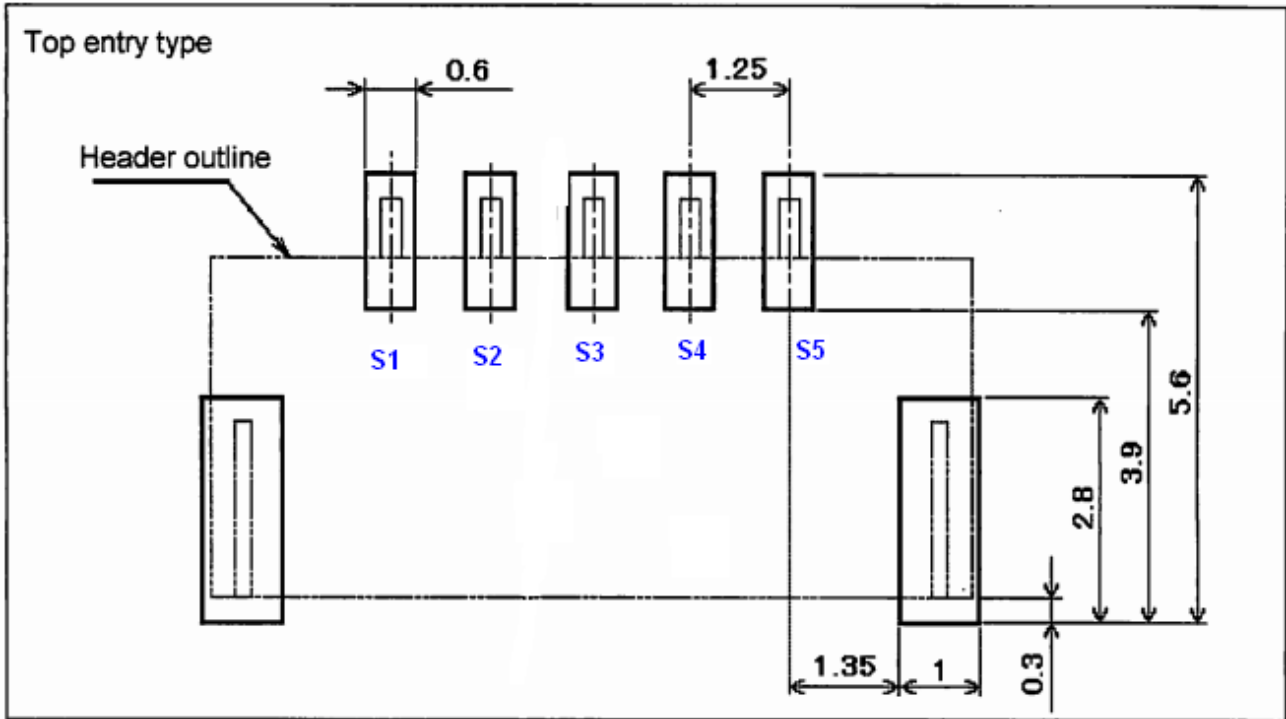

Pin Number	Symbol Name	Status	Pin definition
1	GND		Ground
2	DP	I/O	USB positive data
3	DM	I/O	USB negative data
4	UV+	P	USB +5V power input
5	GND		Ground
S1	GND		Ground
S2	GND		Ground

### 3 Electrical Specification

#### 3.1 Absolute maximum rating

Element	Symbol	Min	Typ	Max	Unit
DC supply voltage	UV+		5.0	6.5	(V)

#### 3.2 Recommended operating rating

Element	Symbol	Min	Typ	Max	Unit
DC supply voltage	UV+	4.5	5.0	5.5	(V)

#### 3.3 DC Characteristics

Symbol	Parameter	Min	Typ	Max	Unit
UV+	Supply voltage	4.5	5.0	5.5	(V)
	Tx Current(1M/15dBm)	200	280	400	(mA)
	Tx Current(11M/15dBm)	200	280	400	(mA)
	Tx Current(6M/15dBm)	200	280	400	(mA)
	Tx Current(54M/15dBm)	200	280	400	(mA)
	Tx Current(MCS0/15Bm/HT20)	200	280	400	(mA)
	Tx Current(MCS7/15dBm/HT20)	200	280	400	(mA)
	Rx Current			90	(mA)
	Bluetooth TX			110	(mA)
Bluetooth RX	--		110	(mA)	

#### 3.4 ESD Information

Mode	Level	Unit
HBM	+/-1500	V
MM	+/-200	V

#### 3.5 Environment Storage Condition

Environment condition	
Temperature	Operating Temperature: -10 deg.C ~70 deg.C
	Storage Temperature: -40 deg.C ~80 deg.C
Humidity	Operating Humidity: 20% ~90%
	Storage Humidity: 20% ~90%



## 4 RF Specification

### 4.1 IEEE802.11b

Items	Contents			
Specification	IEEE802.11b			
Mode	DSSS / CCK			
Channel	CH1 to CH13			
Data rate	1, 2, 5.5, 11Mbps			
<b>TX Characteristics</b>	<b>Min.</b>	<b>Typ.</b>	<b>Max.</b>	<b>Unit</b>
1. Power Levels (Calibrated)				
1) Target Power@1Mbps	13.5	15	16.5	dBm
2) Target Power@2Mbps	13.5	15	16.5	dBm
3) Target Power@5.5Mbps	13.5	15	16.5	dBm
4) Target Power@11Mbps	13.5	15	16.5	dBm
2. Spectrum Mask @16dBm				
1) $f_c - 33\text{MHz} < f < f_c - 22\text{MHz}$	-	-	-50	dBr
2) $f_c - 22\text{MHz} < f < f_c - 11\text{MHz}$	-	-	-30	dBr
3) $f_c + 11\text{MHz} < f < f_c + 22\text{MHz}$	-	-	-30	dBr
4) $f_c + 22\text{MHz} < f < f_c + 33\text{MHz}$	-	-	-50	dBr
3. Frequency Error	-15	-	+5	ppm
4 Modulation Accuracy(EVM)@16dBm				
1) 1Mbps	-		-10	dB
2) 2Mbps	-		-10	dB
3) 5.5Mbps	-		-10	dB
4) 11Mbps	-		-10	dB
<b>RX Characteristics</b>	<b>Min.</b>	<b>Typ.</b>	<b>Max.</b>	<b>Unit</b>
5 Minimum Input Level Sensitivity				
1) 1Mbps (FER ≤ 8%)	-	-95	-92	dBm
2) 2Mbps (FER ≤ 8%)	-	-92	-89	dBm
3) 5.5Mbps (FER ≤ 8%)	-	-90	-87	dBm
4) 11Mbps (FER ≤ 8%)	-	-88	-85	dBm
6 Maximum Input Level (FER ≤ 8%)	-10	-5	-	dBm



## 4.2 IEEE802.11g

Items	Contents			
Specification	IEEE802.11g			
Mode	OFDM			
Channel	CH1 to CH13			
Data rate	6, 9, 12, 18, 24, 36, 48, 54Mbps			
<b>TX Characteristics</b>	<b>Min.</b>	<b>Typ.</b>	<b>Max.</b>	<b>Unit</b>
1. Power Levels (Calibrated)				
1) Target Power@6Mbps	13.5	15	16.5	dBm
2) Target Power@9Mbps	13.5	15	16.5	dBm
3) Target Power@12Mbps	13.5	15	16.5	dBm
4) Target Power@18Mbps	13.5	15	16.5	dBm
5) Target Power@24Mbps	13.5	15	16.5	dBm
6) Target Power@36Mbps	13.5	15	16.5	dBm
7) Target Power@48Mbps	13.5	15	16.5	dBm
8) Target Power@54Mbps	13.5	15	16.5	dBm
2. Spectrum Mask @14dBm				
1) at fc +/- 11MHz	-	-	-20	dBr
2) at fc +/- 20MHz	-	-	-28	dBr
3) at fc > +/-30MHz	-	-	-40	dBr
3 Modulation Accuracy(EVM)@14dBm				
1) 6Mbps	-	-	-5	dB
2) 9Mbps	-	-	-8	dB
3) 12Mbps	-	-	-10	dB
4) 18Mbps	-	-	-13	dB
5) 24Mbps	-	-	-16	dB
6) 36Mbps	-	-	-19	dB
7) 48Mbps	-	-	-22	dB
8) 54Mbps	-	-28	-25	dB
4 Frequency Error	-15	-	+5	ppm
<b>RX Characteristics</b>	<b>Min.</b>	<b>Typ.</b>	<b>Max.</b>	<b>Unit</b>
5 Minimum Input Level Sensitivity				
1) 6Mbps (PER < 10%)	-	-89	-86	dBm
2) 9Mbps (PER < 10%)	-	-87	-84	dBm
3) 12Mbps (PER < 10%)	-	-85	-82	dBm
4) 18Mbps (PER < 10%)	-	-83	-80	dBm
5) 24Mbps (PER < 10%)	-	-80	-77	dBm
6) 36Mbps (PER < 10%)	-	-77	-74	dBm
7) 48Mbps (PER < 10%)	-	-73	-70	dBm
8) 54Mbps (PER < 10%)	-	-72	-69	dBm
6 Maximum Input Level (PER < 10%)	-20	-11	-	dBm





### 4.3 802.11n HT20

Items	Contents			
Specification	IEEE802.11n HT20			
Mode	OFDM			
Channel	CH1 to CH13			
Data rate (MCS index)	MCS0/1/2/3/4/5/6/7			
<b>TX Characteristics</b>	<b>Min.</b>	<b>Typ.</b>	<b>Max.</b>	<b>Unit</b>
1. Power Levels (Calibrated)				
1) Target Power@MCS0	13.5	15	16.5	dBm
2) Target Power@ MCS1	13.5	15	16.5	dBm
3) Target Power@ MCS2	13.5	15	16.5	dBm
4) Target Power@ MCS3	13.5	15	16.5	dBm
5) Target Power@ MCS4	13.5	15	16.5	dBm
6) Target Power@ MCS5	13.5	15	16.5	dBm
7) Target Power@ MCS6	13.5	15	16.5	dBm
8) Target Power@ MCS7	13.5	15	16.5	dBm
2. Spectrum Mask @14dBm				
1) at fc +/- 11MHz	-	-	-20	dBr
2) at fc +/- 20MHz	-	-	-28	dBr
3) at fc > +/-30MHz	-	-	-45	dBr
3. Modulation Accuracy(EVM)@14dBm				
1) MCS0	-	-	-5	dB
2) MCS1	-	-	-10	dB
3) MCS2	-	-	-13	dB
4) MCS3	-	-	-16	dB
5) MCS4	-	-	-19	dB
6) MCS5	-	-	-22	dB
7) MCS6	-	-	-25	dB
8) MCS7	-	-	-28	dB
4. Frequency Error	-15	-	+5	ppm
<b>RX Characteristics</b>	<b>Min.</b>	<b>Typ.</b>	<b>Max.</b>	<b>Unit</b>
5. Minimum Input Level Sensitivity				
1) MCS0 (PER < 10%)	-	-88	-85	dBm
2) MCS1 (PER < 10%)	-	-85	-82	dBm
3) MCS2 (PER < 10%)	-	-83	-80	dBm
4) MCS3 (PER < 10%)	-	-80	-77	dBm
5) MCS4 (PER < 10%)	-	-77	-74	dBm
6) MCS5 (PER < 10%)	-	-73	-69	dBm
7) MCS6 (PER < 10%)	-	-71	-68	dBm
8) MCS7 (PER < 10%)	-	-70	-67	dBm
6. Maximum Input Level (PER < 10%)	-20	-10	-	dBm

### 4.4 Bluetooth Standard Specifications

Bluetooth Core Specification version 4.0:

Support all Bluetooth 4.0+HS packet types.

Operating frequency range: 2400MHz ~2483.5MHz

Modulation type:

Basic rate 1Mbps: GFSK,

Enhanced data rate 2Mbps: DQPSK

Enhanced data rate 3Mbps: 8DPSK



## **5 Operation SOP**

- 1: Install normal driver under Linux PC
- 2: search WiFi AP and double click to make connection
- 3: If connection setup is ok, PC can communicate with network through wireless AP.

Items	Contents			
<b>Specification</b>	BT4.0+EDR			
<b>Frequency range</b>	2.4GHz~2.4835GHz			
<b>Data rate</b>	1Mbps, 2Mbps, 3Mbps			
<b>- TX Characteristics -</b>	Min.	Typ.	Max.	Unit
<b>1. Power Levels</b>				
BT Output Power	-3	1	3	dBm
<b>2. Initial Carrier Frequency Tolerance</b>				
Average Offset	-75	2	75	kHz
<b>3. Carrier Drift</b>				
<b>Drift Rate</b>				
DH1	-20	-3	20	kHz/50us
DH3	-20	0	20	kHz/50us
DH5	-20	4	20	kHz/50us
<b>Average Drift</b>				
DH1	-25	-3	25	kHz
DH3	-40	-4	40	kHz
DH5	-40	-5	40	kHz
<b>4. Modulation Characteristic</b>				
F1avg	140	164	175	kHz
F2max	115	135		kHz
F1/F2 Ratio	0.8	0.90		
<b>5. EDR Relative Transmit Power</b>				
2Mbps: P[DQPSK]-P[GFSK]	-4	-0.15	1	dB
3Mbps: P[8DPSK]-P[GFSK]	-4	-0.2	1	dB
<b>6. EDR Carrier Frequency Stability and Modulation Accuracy</b>				
<b>2Mbps: <math>\pi/4</math> DQPSK</b>				
Initial Frequency Error: $\omega_i$	-75	1.2	75	kHz
Frequency Error: $\omega_0$	-10	0	10	kHz
Block Frequency Error: $\omega_i + \omega_0$	-75	2	75	kHz
RMS DEVM	-	-	0.2	
Peak DEVM	-	-	0.35	
99% DEVM (% Symbols $\leq 0.3$ )	99%	100%		
<b>3Mbps: 8DPSK</b>				
Initial Frequency Error: $\omega_i$	-75	1	75	kHz
Frequency Error: $\omega_0$	-10	0	10	kHz
Block Frequency Error: $\omega_i + \omega_0$	-75	1.6	75	kHz
RMS DEVM	-	-	0.13	
Peak DEVM	-	-	0.25	
99% DEVM (% Symbols $\leq 0.13$ )	99%	100%		
<b>7. Tx Spurious Emission</b>				
30MHz- 1GHz	-	-60	-36	dBm
1GHz – 13.2GHz	-	-60	-30	dBm



Items	Contents			
Specification	BT4.0+EDR			
Frequency range	2.4GHz~2.4835GHz			
Data rate	1Mbps, 2Mbps, 3Mbps			
<b>- RX Characteristics -</b>	Min.	Typ.	Max.	Unit
<b>1. Minimum Input Level Sensitivity</b>				
GFSK (1Mbps)	-	-	-79	dBm
$\pi/4$ DQPSK (2Mbps)	-	-	-72	dBm
8DPSK (3Mbps)	-	-	-72	dBm
<b>2. Maximum Input Level</b>				
GFSK (1Mbps)	-20	0		dBm
$\pi/4$ DQPSK (2Mbps)	-20	0		dBm
8DPSK (3Mbps)	-20	0		dBm
<b>3. Rx Emission</b>				
30MHz- 1GHz	-	-	-57	dBm
1GHz – 13.2GHz	-	-	-47	dBm

## 6 Mechanical Specifications


### 6.1 Shielding Cover Dimension

Dimension (LxWxH): 20.32mm x 18.28mm x 2.4mm

Thickness: 0.2mm

1. \* MEANS CRITICAL DIMENSION
2. COLOR/NATURE
3. PART TO BE FREE OF MANUFACTURING LUBRICANTS.
4. ALL UNSPECIFIED INSIDE BEND RADIUS TO BE 0.25 mm OR LESS.
5. ARROW INDICATES PUNCH DIRECTION.
6. THERE MUST NOT BE SMUDGINESS, SMEAR, ACCIDENTED, DISTORTION, OXIDATION ON THE SURFACE
7. THE WIDTH OF THE SCRATCH SHOULD NOT BE BIGGER THEN 0.05MM AND ALL THE SCRATCH IN THE AREA OF 25 SQUARE CENTIMETER SHOULD NOT BE BIGGER THEN 50MM.
8. MATERIAL THICKNESS TOLERANCE: 0.01MM
9. ALL 90 DEG BEND WALLS TOLERANCE -1 TO +1 DEGS
10. THE DIMENSION WITHOUT TOLERANCE WILL REFER TO THE TOLERANCE BOM AS BELOW 'A' level with '\*' MARKED.
11. THIS PART MUST BE COMPLIED WITH EU WEEE AND ROHS RULE

REV.	MARK.	DCR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
00			2012.02.08	FIRST RELEASE	fu yu
01			2012.02.25	SECOND RELEASE	fu yu

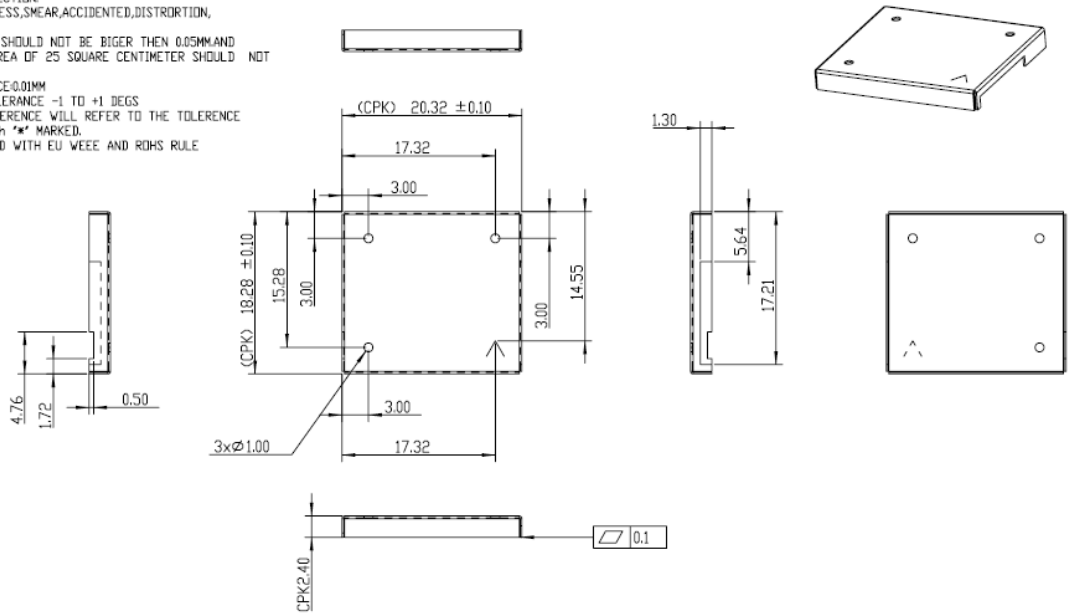

scale 1.000


MATERIAL (SPEC.)		C7521 T=0.2mm		SCALE	2:1								
FINISH		N/A		SHEET	1/1								
Select	* A	B	C	EPS	EPE	BAG	CTN	LABEL	USR	UNIT	PART NAME		
0-6	0.05	0.05	0.10					0.20	0.05	m/m	SHIELDING COVER		
6-30	0.10	0.15	0.20	0.50	0.50	3.00		0.20	0.05	SIZE	MODEL	PART NO.	DESIGNED
---	30-120	0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25	A4	J20H064.00	426.01363.005	fu yu
	120-300	0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30				
	300-450	0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50				
	450-600	0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80				
DIMENSION DESIGNATOR	DRAFT	TOLERANCE	±0.2*	CRITICAL DIM	MARK	*					CUSTOMER MODEL	CUSTOMER PART NO.	APPROVED
													Anda woo



## 6.2 PCB Assembly Dimension

Dimension (W x L x H ): 51.8mmx20mmx0.9mm

PCB: 2 layer HF-FR4 design

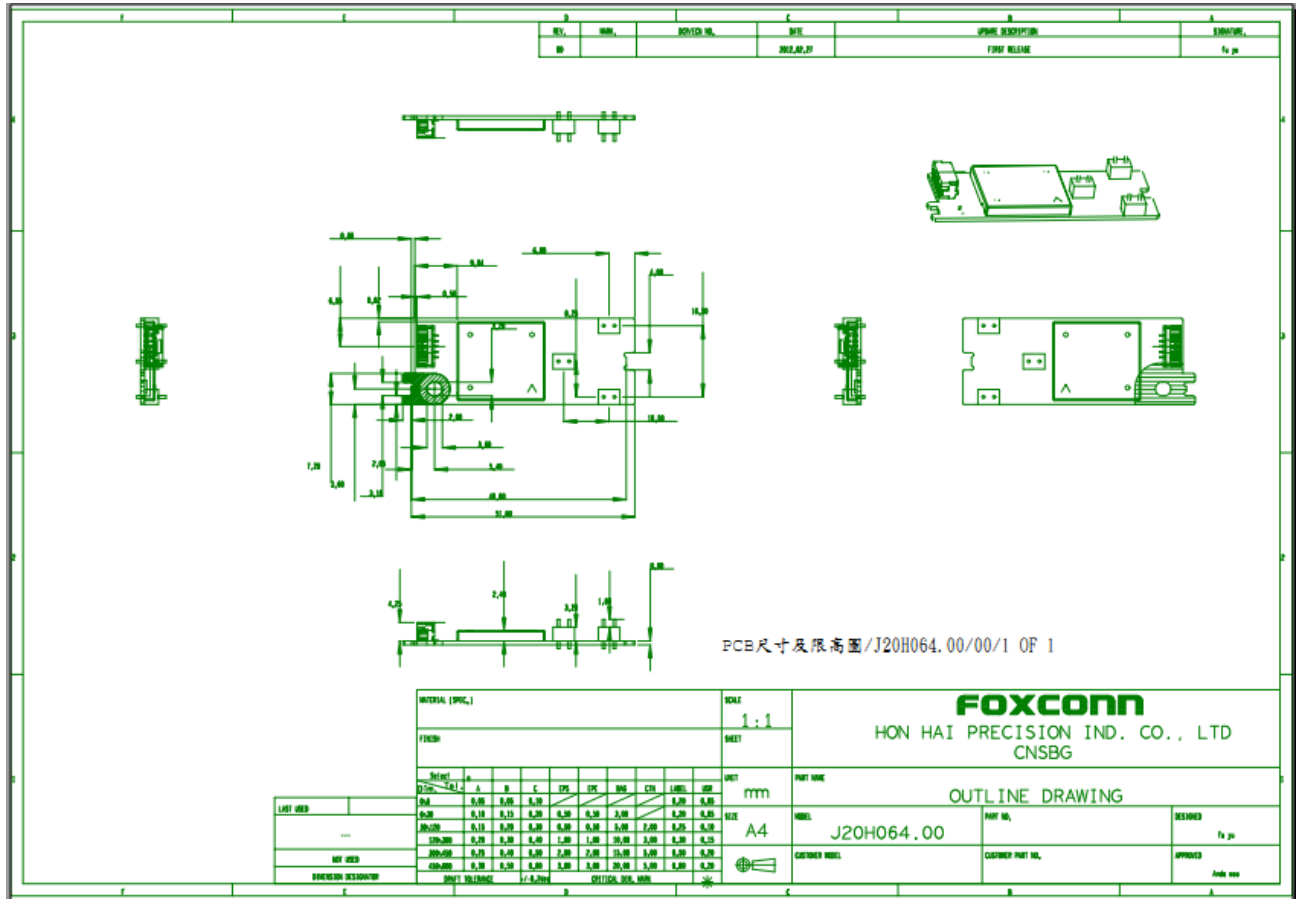

### Industry Canada statement:

This device complies with RSS-210 of the Industry Canada Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Ce dispositif est conforme à la norme CNR-210 d'Industrie Canada applicable aux appareils radio exempts de licence. Son fonctionnement est sujet aux deux conditions suivantes: (1) le dispositif ne doit pas produire de brouillage préjudiciable, et (2) ce dispositif doit accepter tout brouillage reçu, y compris un brouillage susceptible de provoquer un fonctionnement indésirable.

### Radiation Exposure Statement:

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

### Déclaration d'exposition aux radiations:

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.

***This device is intended only for OEM integrators under the following conditions:***



**(For module device use)**

1) The antenna must be installed such that 20 cm is maintained between the antenna and users, and

2) The transmitter module may not be co-located with any other transmitter or antenna.

As long as 2 conditions above are met, further transmitter test will not be required.

However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed.

**Cet appareil est conçu uniquement pour les intégrateurs OEM dans les conditions suivantes: (Pour utilisation de dispositif module)**

1) L'antenne doit être installée de telle sorte qu'une distance de 20 cm est respectée entre l'antenne et les utilisateurs, et

2) Le module émetteur peut ne pas être coïmplanté avec un autre émetteur ou antenne.

Tant que les 2 conditions ci-dessus sont remplies, des essais supplémentaires sur

l'émetteur ne seront pas nécessaires. Toutefois, l'intégrateur OEM est toujours

responsable des essais sur son produit final pour toutes exigences de conformité

supplémentaires requis pour ce module installé.

**IMPORTANT NOTE:**

In the event that these conditions can not be met (for example certain laptop configurations or co-location with another transmitter), then the Canada authorization is no longer considered valid and the IC ID can not be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate Canada authorization.

**NOTE IMPORTANTE:**

Dans le cas où ces conditions ne peuvent être satisfaites (par exemple pour certaines configurations d'ordinateur portable ou de certaines co-localisation avec un autre émetteur), l'autorisation du Canada n'est plus considéré comme valide et l'ID IC ne peut pas être utilisé sur le produit final. Dans ces circonstances, l'intégrateur OEM sera chargé de réévaluer le produit final (y compris l'émetteur) et l'obtention d'une autorisation distincte au Canada.

**End Product Labeling**

This transmitter module is authorized only for use in device where the antenna may be installed such that 20 cm may be maintained between the antenna and users. The final end product must be labeled in a visible area with the following: "Contains IC: 2878D-J20H064".

**Plaque signalétique du produit final**

Ce module émetteur est autorisé uniquement pour une utilisation dans un dispositif où l'antenne peut être installée de telle sorte qu'une distance de 20cm peut être maintenue entre l'antenne et les utilisateurs. Le produit final doit être étiqueté dans un endroit visible avec l'inscription suivante: "Contient des IC: 2878D- J20H064".

**Manual Information To the End User**

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module.

The end user manual shall include all required regulatory information/warning as show in this manual.

**Manuel d'information à l'utilisateur final**

L'intégrateur OEM doit être conscient de ne pas fournir des informations à l'utilisateur final quant à la façon d'installer ou de supprimer ce module RF dans le manuel de l'utilisateur du produit final qui intègre ce module.

Le manuel de l'utilisateur final doit inclure toutes les informations réglementaires requises et avertissements comme indiqué dans ce manuel.



## **Federal Communication Commission Interference Statement**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

### ***Radiation Exposure Statement:***

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

### **This device is intended only for OEM integrators under the following conditions:**

- 1) The antenna must be installed such that 20 cm is maintained between the antenna and users, and
- 2) The transmitter module may not be co-located with any other transmitter or antenna.

As long as 2 conditions above are met, further transmitter test will not be required. However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed

**IMPORTANT NOTE:** In the event that these conditions can not be met (for example certain laptop configurations or co-location with another transmitter), then the FCC authorization is no longer considered valid and the FCC ID can not be used on the final product. In these circumstances, the OEM integrator will be responsible for reevaluating

the end product (including the transmitter) and obtaining a separate FCC authorization.

### **End Product Labeling**





This transmitter module is authorized only for use in device where the antenna may be installed such that 20 cm may be maintained between the antenna and users. The final end product must be labeled in a visible area with the following: "Contains FCC ID: MCLJ20H064". The grantee's FCC ID can be used only when all FCC compliance requirements are met.

#### **Manual Information To the End User**


The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module.

The end user manual shall include all required regulatory information/warning as show in this manual.

#### **For Taiwan 警語：(電信管制射頻器材使用)**

經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前項合法通信，指依電信法規定作業之無線電通信。低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

**Note:** 1. 本模組於取得認證後將依規定於模組本體標示審驗合格標籤 2. 系統廠商應於平台上標示「本產品內含射頻模組： XXXyyyLPDzzzz-x (NCC ID) 」字樣

#### **Europe – EU Declaration of Conformity**

This device complies with the essential requirements of the R&TTE Directive 1999/5/EC. The following test methods have been applied in order to prove presumption of conformity with the essential requirements of the R&TTE Directive 1999/5/EC:

- EN 60950-1: 2006+A11:2009+A1:2010+A12:2011  
Safety of Information Technology Equipment
- EN 62311: 2008  
Assessment of electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (0 Hz-300 GHz)  
(IEC 62311:2007 (Modified))
- EN 300 328 V1.7.1: 2006
- Electromagnetic compatibility and Radio spectrum Matters (ERM); Wideband Transmission systems; Data transmission equipment operating in the 2,4 GHz ISM band and using spread spectrum modulation techniques; Harmonized EN covering essential requirements under article 3.2 of the R&TTE Directive
- EN 301 489-1 V1.8.1: 2008  
Electromagnetic compatibility and Radio Spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements
- EN 301 489-17 V2.1.1 2009






Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 17: Specific conditions for 2,4 GHz wideband transmission systems and 5 GHz high performance RLAN equipment

National Authorities were informed according to Article 6.4 of Frequency Notification.

Special Requirements are considered. The product is labeled with CE Marking.



 Český [Czech]	<i>[Jméno výrobce]</i> tímto prohlašuje, že tento <i>[typ zařízení]</i> je ve shodě se základními požadavky a dalšími příslušnými ustanoveními směrnice 1999/5/ES.
 Dansk [Danish]	Undertegnede <i>[fabrikantens navn]</i> erklærer herved, at følgende udstyr <i>[udstyrets typebetegnelse]</i> overholder de væsentlige krav og øvrige relevante krav i direktiv 1999/5/EF.
 Deutsch [German]	Hiermit erkläre <i>[Name des Herstellers]</i> , dass sich das Gerät <i>[Gerätetyp]</i> in Übereinstimmung mit den grundlegenden Anforderungen und den übrigen einschlägigen Bestimmungen der Richtlinie 1999/5/EG befindet.
 Eesti [Estonian]	Käesolevaga kinnitab <i>[tootja nimi = name of manufacturer]</i> seadme <i>[seadme tüüp = type of equipment]</i> vastavust direktiivi 1999/5/EÜ põhinõuetele ja nimetatud direktiivist tulenevatele teistele asjakohastele sätetele.
 English	Hereby, <i>[name of manufacturer]</i> , declares that this <i>[type of equipment]</i> is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.
 Español [Spanish]	Por medio de la presente <i>[nombre del fabricante]</i> declara que el <i>[clase de equipo]</i> cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de la Directiva 1999/5/CE.
 Ελληνική [Greek]	ΜΕ ΤΗΝ ΠΑΡΟΥΣΑ <i>[name of manufacturer]</i> ΔΗΛΩΝΕΙ ΟΤΙ <i>[type of equipment]</i> ΣΥΜΜΟΡΦΩΝΕΤΑΙ ΠΡΟΣ ΤΙΣ ΟΥΣΙΩΔΕΙΣ ΑΠΑΙΤΗΣΕΙΣ ΚΑΙ ΤΙΣ ΛΟΙΠΕΣ ΣΧΕΤΙΚΕΣ ΔΙΑΤΑΞΕΙΣ ΤΗΣ ΟΔΗΓΙΑΣ 1999/5/ΕΚ.
 Français [French]	Par la présente <i>[nom du fabricant]</i> déclare que l'appareil <i>[type d'appareil]</i> est conforme aux exigences essentielles et aux autres dispositions pertinentes de la directive 1999/5/CE.
 Italiano [Italian]	Con la presente <i>[nome del costruttore]</i> dichiara che questo <i>[tipo di apparecchio]</i> è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti stabilite dalla direttiva 1999/5/CE.
Latviski [Latvian]	Ar šo <i>[name of manufacturer / izgatavotāja nosaukums]</i> deklarē, ka <i>[type of equipment / iekārtas tips]</i> atbilst Direktīvas 1999/5/EK būtiskajām prasībām un citiem ar to saistītajiem noteikumiem.
Lietuvių [Lithuanian]	Šiuo <i>[manufacturer name]</i> deklaruojama, kad šis <i>[equipment type]</i> atitinka esminius reikalavimus ir kitas 1999/5/EB Direktyvos nuostatas.
 Nederlands [Dutch]	Hierbij verklaart <i>[naam van de fabrikant]</i> dat het toestel <i>[type van toestel]</i> in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijn 1999/5/EG.
 Malti [Maltese]	Hawnhekk, <i>[isem tal-manifattur]</i> , jiddikjara li dan <i>[il-mudel tal-prodott]</i> jikkonforma mal-ħtiġijiet essenzjali u ma provvedimenti oħrajn rilevanti li hemm fid-Dirrettiva 1999/5/EC.
 Magyar	Alulírott, <i>[gyártó neve]</i> nyilatkozom, hogy a <i>[... típus]</i> megfelel a vonatkozó

[Hungarian]	alapvető követelményeknek és az 1999/5/EC irányelv egyéb előírásainak.
 Polski [Polish]	Niniejszym <i>[nazwa producenta]</i> oświadcza, że <i>[nazwa wyrobu]</i> jest zgodny z zasadniczymi wymogami oraz pozostałymi stosownymi postanowieniami Dyrektywy 1999/5/EC.
 Português [Portuguese ]	<i>[Nome do fabricante]</i> declara que este <i>[tipo de equipamento]</i> está conforme com os requisitos essenciais e outras disposições da Directiva 1999/5/CE.
 Slovensko [Slovenian]	<i>[Ime proizvajalca]</i> izjavlja, da je ta <i>[tip opreme]</i> v skladu z bistvenimi zahtevami in ostalimi relevantnimi določili direktive 1999/5/ES.
Slovensky [Slovak]	<i>[Meno výrobcu]</i> týmto vyhlasuje, že <i>[typ zariadenia]</i> spĺňa základné požiadavky a všetky príslušné ustanovenia Smernice 1999/5/ES.
 Suomi [Finnish]	<i>[Valmistaja = manufacturer]</i> vakuuttaa täten että <i>[type of equipment = laitteen tyyppimerkintä]</i> tyyppinen laite on direktiivin 1999/5/EY oleellisten vaatimusten ja sitä koskevien direktiivin muiden ehtojen mukainen.
 Svenska [Swedish]	Härmed intygar <i>[företag]</i> att denna <i>[utrustningstyp]</i> står i överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiv 1999/5/EG.