

Product Specification

WN7111A-FI

IEEE 802.11n USB2.0 Module

v.02

Table of Contents

Chapter 1	Introduction	4
1.1	Product Features	4
1.2	Applications	4
Chapter 2	Hardware	5
2.1	General Overview	5
2.2	Hardware Architecture	5
2.3	Main Chipset Information	5
2.4	PCB dimension	5
2.5	Pin Definition	5
Chapter 3	Software	7
3.1	Operating System Supported	7
3.2	Wireless Mode Supported	7
3.3	Security	7
Chapter 4	Appearance	8
Chapter 5	Specifications	9
	FCC Statement	11
	References	13

Revision History

<i>Edition #</i>	<i>Reason for revision</i>	<i>Issue date</i>	<i>Written by</i>
V 0.1	◆ Initial Document	2011/02/10	Troy Chen
V 0.2	◆ Update Tx power	2011/04/27	Peter Wang
	◆ Add product appearance		
	◆ Add FCC statement.		

Chapter 1 Introduction

WN7511F is a wireless 1x1 802.11n USB Adapter which enables wireless networking systems to attain data communication speeds up to 150 megabits-per-second (Mbps), while remaining backward compatible to the existing installed base of Wi-Fi systems worldwide. It supports operation to the IEEE 802.11b and IEEE 802.11g ,and draft IEEE 802.11n standards.

The cost and performance advantages will make it an ideal solution for high bandwidth enterprise applications, such as wireless video conferencing and large file transfers. It is compatible with 802.11g standard's mandatory modulation schemes—Complementary Code Keying (CCK), which is used in 802.11b, and Orthogonal Frequency Division Multiplexing (OFDM), used in 802.11g and draft 802.11n. Using CCK ensures backward-compatibility with the installed Wi-Fi 802.11b base, while OFDM provides the speed required for today's high-bandwidth applications.

1.1 Product Features

- ◆ High speed for wireless LAN connection, RX up at 150 Mbps data rate.
- ◆ Backward compatible to the existing IEEE 802.11b/g WLAN infrastructure.
- ◆ Support USB2.0

1.2 Applications

- ◆ WiFi Module for Funai NetBox

Chapter 2 Hardware

2.1 General Overview

- ◆ USB 2.0 Interface and 802.11 n chipset-on-board design.
- ◆ 1 printed antenna

2.2 Hardware Architecture

BRCM 43234


2.3 Main Chipset Information


The BRCM43234 is a dual-band (2.4GHz and 5GHz) IEEE802.11n compliant MAC/PHY/Radio complete system-on-a-chip with 2.4GHz and 5GHz internal Pas.

2.4 PCB dimension

23x35mm

2.5 Pin Definition

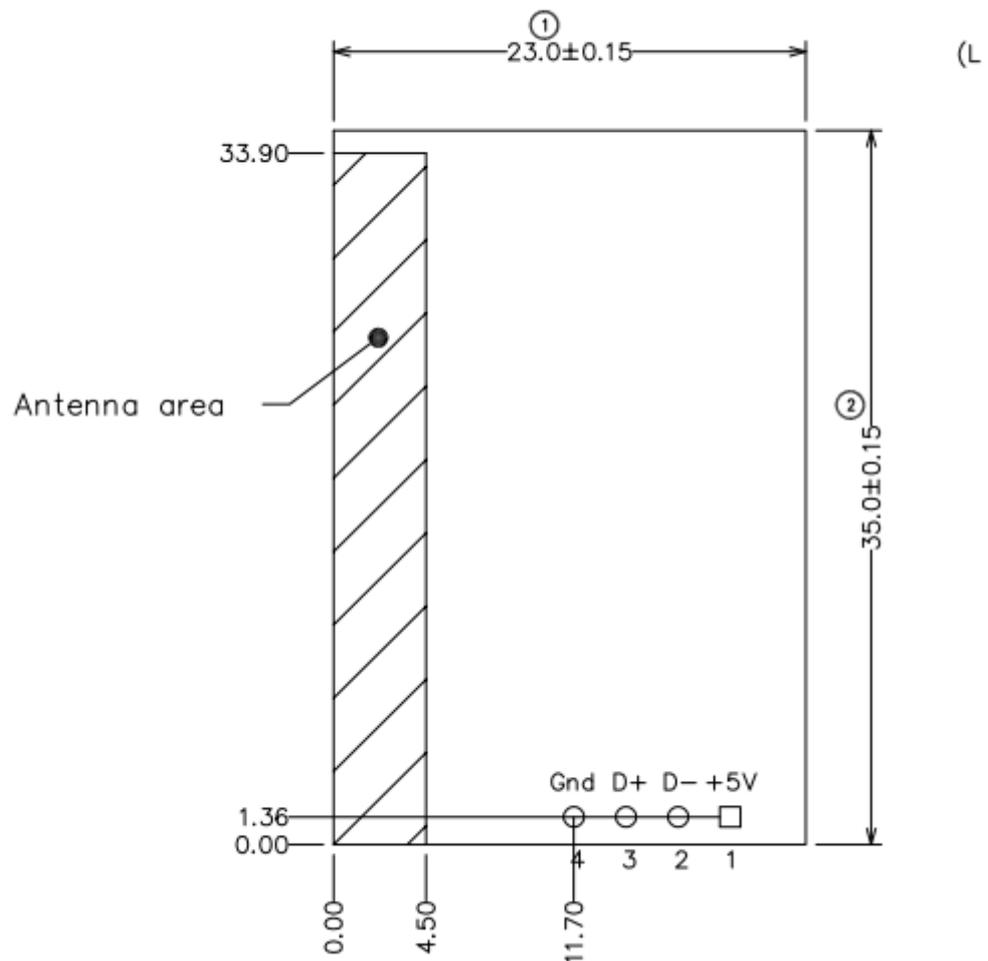

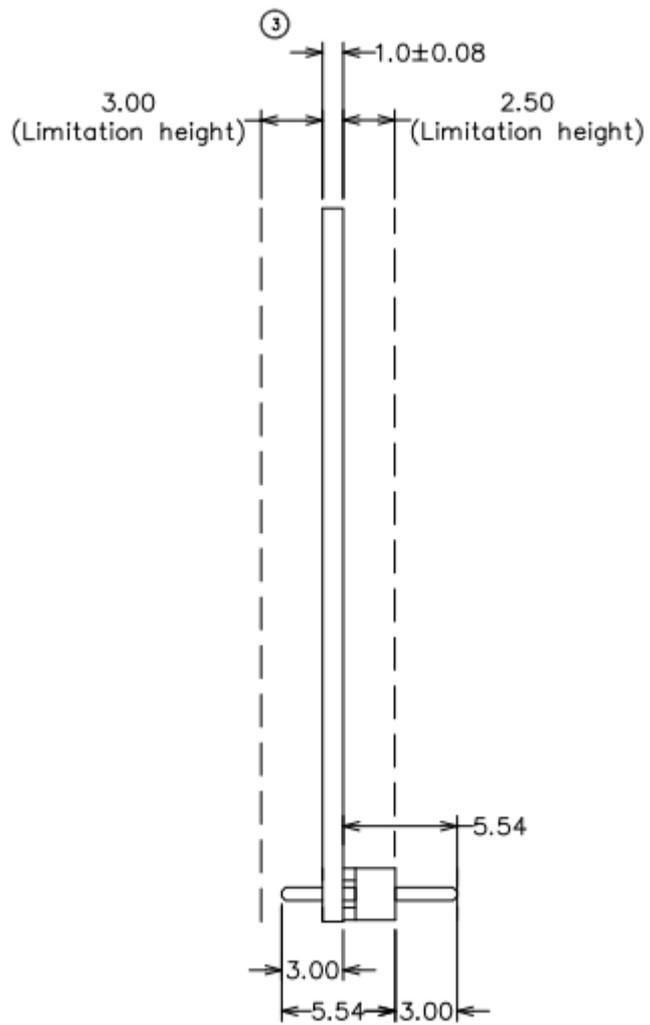

Chapter 3 Software

3.1 Operating System Supported

- ◆ Windows 2000, XP, Vista
- ◆ Linux OS

3.2 Wireless Mode Supported

- ◆ AP (Infrastructure) Client mode

3.3 Security

- ◆ AP (Infrastructure) mode supports
 - ◆ Static WEP that support both 64 and 128 bit keys.
 - ◆ WPA,WPA-PSK, WPA2,WPA2-PSK
- ◆ Ad-hoc mode supports
 - ◆ None (plaintext)
 - ◆ Static WEP that supports both 64 and 128 bit keys.

Chapter 4 Appearance

Top side



Bottom side



Chapter 5 Specifications

- ◆ Frequency Band:
 - 802.11n Radio: 2.4 GHz
 - 802.11g Radio: 2.4 GHz
 - 802.11b Radio: 2.4 GHz
 - USA – FCC, 2412~2462MHz (Ch1~Ch11)

Operating Channels: 11 channels (US, Canada)

- ◆ Transmit Power and Sensitivity:
 - TX Output Power:(Typical)
 - 16dBm +/- 1.5dBm (2.4GHz, 11Mbps, CCK)
 - 15dBm +/- 1.5dBm (2.4GHz, 54Mbps, OFDM)
 - 15dBm +/- 1.5dBm (2.4GHz, 11n HT20)
 - 13dBm +/- 1.5dBm (2.4GHz, 11n HT40)

Rx Sensitivity:(Typical)

- 88 dBm @6 Mbps
- 87 dBm @9 Mbps
- 84 dBm @12 Mbps
- 81dBm @18 Mbps
- 79dBm @24 Mbps
- 75dBm @36 Mbps
- 71dBm @48 Mbps
- 70 dBm @54 Mbps
- 64 dBm @64-QAM, 20MHz channel spacing
- 62 dBm @64-QAM, 40MHz channel spacing

- ◆ Modulation
 - DBPSK @1Mbps
 - DQPSK@2Mbps
 - CCK@5.5/11Mbps
 - BPSK@6/9 Mbps

QPSK@12/18Mbps

16-QAM@24Mbps

64-QAM@48/54Mbps and above, RX up to 150Mbps

- ◆ Operating Temperature: 0 ~ 40 °C ambient
- ◆ Storage Temperature: -10 ~ 70 °C ambient
- ◆ Humidity: 5 ~ 90% and must be non-condensing
- ◆ Regulation and certification compliance available:
 - FCC

FCC Statement

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

For product available in the USA/Canada market, only channel 1~11 can be operated. Selection of other channels is not possible.

This device and its antenna(s) must not be co-located or operation in conjunction with

any other antenna or transmitter.

IMPORTANT NOTE:

This module is intended for OEM integrator. The OEM integrator is still responsible for the FCC compliance requirement of the end product, which integrates this module.

20cm minimum distance has to be able to be maintained between the antenna and the users for the host this module is integrated into. Under such configuration, the FCC radiation exposure limits set forth for an population/uncontrolled environment can be satisfied.

Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate this equipment.

USERS MANUAL OF THE END PRODUCT:

In the users manual of the end product, the end user has to be informed to keep at least 20cm separation with the antenna while this end product is installed and operated. The end user has to be informed that the FCC radio-frequency exposure guidelines for an uncontrolled environment can be satisfied. The end user has to also be informed that any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate this equipment. If the size of the end product is smaller than 8x10cm, then additional FCC part 15.19 statement is required to be available in the users manual: This device complies with Part 15 of FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

LABEL OF THE END PRODUCT:

The final end product must be labeled in a visible area with the following " Contains TX FCC ID: RAXWN7111A ". If the size of the end product is larger than 8x10cm, then the following FCC part 15.19 statement has to also be available on the label: This device complies with Part 15 of FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

References

- ◆ BRCM Reference Design Functional Specification
- ◆ IEEE 802.11b Standard Specification
- ◆ IEEE 802.11g Standard Specification
- ◆ IEEE 802.11n draft Standard Specification

The drawings, specifications and the data contain herein are the exclusive property of Arcadyan Technology Corp. issued in strict confidence and shall not, without the prior written permission of Arcadyan Technology Corp., be reproduced, copied or used, in parts or as a whole, for any purpose whatsoever, except the manufacture of articles for Arcadyan Technology Corp.

Arcadyan makes no warranties with respect to the correctness, accuracy or wholeness of this specification. The information in this document is subject to change without notice. Arcadyan reserves the right to make revisions to this document and the product described herein without obligation to notify any person or entity of any such changes.