

11g Wireless Broadband Router

User Guide

12/08/2003

FCC Interference Statement

This device complies with Part 15 of FCC rule. Operation is subject to the following two conditions:

- This device may not cause harmful interference.
- This device must accept any interference received, including interference that may cause undesired operation.

This 11g Wireless Broadband Router has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used according to the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

1. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.
2. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.
 3. Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user authority to operate the equipment.

If this equipment does cause harmful interference to radio or television reception, which is found by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment or device.
- Connect the equipment to an outlet other than the receiver's.
- Consult a dealer or an experienced radio/TV technician for assistance.

CE Declaration of Conformity

This equipment complies with the specifications relating to electromagnetic compatibility, EN 55022/A1 Class B, and EN 50082-1. This meets the reasonable protection requirements set out in the European Council Directive on the approximation of the laws of the member states relating to Electromagnetic Compatibility Directive (89/336/EEC).

Manufacturer's Disclaimer State

The information in this document is subject to change without notice and does not represent a commitment on the part of vendor. No warranty or representation, either expressed or implied, is made with respect to the quality, accuracy or fitness for any particular purpose of this document. The manufacturer reserves the right to make changes to the content of this document and/or the products associated with it at any time without obligation to notify any person or organization. In no event will the manufacturer be liable for direct, indirect, special, incidental

or consequential damages arising out of the use or inability to use this product or documentation, even if advised of the possibility of such damages. This document contains materials protected by copyright. All rights are reserved. No part of this manual may be reproduced or transmitted in any form, by any means or for any purpose without expressed written consent of its authors. Product names appearing in this document are mentioned for identification purchases only. All trademarks, product names or brand names appearing in this document are registered property of their respective owners.

Table of Contents

Table of Contents	3
Preface.....	6
About this Guide	6
Chapter 1: Introduction.....	7
Chapter 2: Hardware Installation & Setup.....	7
Chapter 3: Internet Access	7
Chapter 4: Advanced Applications.....	7
Chapter 5: Management Applications.....	7
Chapter 6: Macintosh Setup.....	7
Chapter 7: Trouble Shooting	7
Conventions	7
Chapter 1: Introduction	9
1-1 About The 11g Wireless Broadband Router	9
Ethernet / Fast Ethernet.....	9
Wireless LAN	9
1-2 Contents of the 11g Wireless Broadband Router Package	10
1-3 Features of the 11g Wireless Broadband Router	10
Chapter 2: Installation	12
Front Panel	12
Rear Panel & Connections	13
System Requirements.....	13
Setting Up the TCP/IP Protocol	14
Fixed IP Addresses Configuration	17
Chapter 3: Internet Access.....	20
Prepare your network information	20
Web-based User Interface	20
Basic Configuration – Setup	21
Wireless.....	21
WAN Connection Type	25
Obtain IP automatically	26
Static IP	26

PPPoE	26
Chapter 4: Advanced Applications	34
4-1 DHCP Configuration	34
4-2 Access Control.....	35
Access Control	35
IP Access Setting.....	36
URL Access Setting	37
MAC Access Setting	38
4-3 Virtual Server Settings.....	39
4-4 DMZ Host.....	44
4-5 Dynamic Routing.....	45
4-6 Static Routing	46
4-7 Special Applications	48
4-8 Wireless Setting	49
4-9 DDNS	52
Chapter 5: Management.....	55
5-1 Device Administration Settings	55
5-2 Status Monitor	57
5-3 Log.....	59
5-4 Backup & Restore.....	60
5-5 Upgrade Firmware	60
5-6 Diagnostic-Ping/Tracert.....	61
Ping	61
Tracert	62
Chapter 6: Macintosh Setup	64
6-1 Hardware Connections	64
6-2 Computer Network Configuration.....	64
6-2.1 Dynamic IP Addressing using DHCP Server.....	64
6-2.2 Manual Configuration of Fixed IP Addresses	64
6-3 11g Wireless Broadband router Configuration	65
6-4 Adding 11g Wireless Broadband router to Existing Network	65
Chapter 7: Trouble Shooting	67
Hardware.....	67
Client Side (Computers)	68
Appendix A: Frequently Asked Questions	69

Appendix B: Technical Specifications.....	71
Appendix C: Glossary	73

Preface

Congratulations on your purchase of this 11g Wireless Broadband Router. This router is the perfect design product combining wireless and Ethernet network technology together. Fully compatible with IEEE 802.11g wireless standard, this device not only allows you to take advantage of mobility, but also to have fast Ethernet connection with built-in four 10/100 auto-sensing switch Ethernet ports. Users on wireless and Ethernet LAN can share files, printers, and other networking resource each other at a blazing speed. Best of all, with NAT technology, all users can share single account of Internet access by having this device connect to a DSL/Cable modem.

Integrated 802.11b/g wireless AP, it is quick and easy to deploy wireless LAN without spending extra cost of a wireless access point. The wireless Router's efficient antenna offers a covered range up to 30 meters indoor (150 meters outdoor) and seamless roaming throughout wireless LAN infrastructure. Moreover, the wireless operation provides 64 bit and 128 bit WEP data encryption for high-level security.

With built-in NAT, this device not only provides natural firewall, protecting your network from access by outside users but also extends your LAN connection. Users on the LAN can share a single account of Internet access by having this device connect to a DSL/Cable modem. This Wireless Router allows up to 253 users on the Ethernet LAN simultaneously but makes IP configuration simple and easy. Configured as a DHCP server, the 11g Wireless Broadband Router assigns an IP Address to every connected PC on Ethernet LAN automatically. Also, DHCP client helps WAN port obtain IP address dynamically assigned by ISP.

With a web-based UI (User Interface), this 11g Wireless Broadband Router is easy to setup and maintain. With this exclusive user-friendly interface, all functions can be configured easily via a web browser such as Netscape Communicator and Internet Explorer.

About this Guide

This manual contains information about installing and configuring your 11g Wireless Broadband Router. It is designed to guide users through the correct setup procedures for appropriate hardware installation and basic configuration. Later, it shows how to complete advanced configurations to get the best

operating performance from this 11g Wireless Broadband Router.

Chapter 1: Introduction

This chapter describes the package contents and provides a list of features and applications illustrations of the 11g Wireless Broadband Router.

Chapter 2: Hardware Installation & Setup

This chapter describes the steps for the hardware installation of the 11g Wireless Broadband Router.

Chapter 3: Internet Access

This chapter describes the steps for the basic configuration and start up of the 11g Wireless Broadband Router.

Chapter 4: Advanced Applications

This chapter describes how to configure advanced functions in order to get the most from your 11g Wireless Broadband Router.

Chapter 5: Management Applications

This chapter describes how to configure Management functions for administration.

Chapter 6: Macintosh Setup

This chapter provides instructions on how to set up your Macintosh computers in your network.

Chapter 7: Trouble Shooting

This chapter describes any potential problems you may encounter and the suggested remedies.

Conventions

The following explains the conventions used throughout this document.

Italics New words, terms, or special emphasis. E.g. *Getting to know your 11g Wireless Broadband Router*.

“Boldface” Buttons, checkboxes, or items that you can select from screens, menus, or dialog boxes. E.g. Click “OK” to restart

Boldface Italics Items in ***Bold Italics*** are samples only and you should enter other names, numbers, or words to substitute.

Chapter 1: Introduction

This chapter describes the package contents and provides a list of features and application illustrations of the 11g Wireless Broadband Router.

1-1 About The 11g Wireless Broadband Router

The 11g Wireless Broadband Router is a hybrid design product which combines Ethernet technology and wireless access into a single stand-alone unit. The device allows you take advantages of both mobility and fast connection. All PCs whenever on wireless LAN or Ethernet LAN can share files, printers and other network resource. Moreover, all users can share single account of Internet access by having this device connect to a DSL/Cable modem.

Ethernet / Fast Ethernet

Ethernet is the most widely-used network access method, especially in a Local Area Network (LAN) and is defined by the IEEE as the 802.3 standard. Normally, Ethernet is a shared media LAN. All stations on the segment share the total bandwidth, which could be 10Mbps (Ethernet), 100Mbps (Fast Ethernet). With a switched Ethernet, each sender and receiver has the full bandwidth.

Fast Ethernet is defined as IEEE 802.3u standard, a high-speed version of Ethernet with 100Mbps transmission rate.

Wireless LAN

Wireless Local Area Network systems (WLANs) transmit and receive data through the air by using radio frequency (RF). This offers some advantages like mobility, ease of installation, and scalability over traditional wired systems.

Mobility: WLANs combine data connectivity with user mobility. This provides users with access to network anywhere in their organization. For example, users can roam from a conference room to their office without being disconnected from the LAN. This is impossible with wired networks.

Ease of Installation: Eliminating the need to deploy network cable on walls and ceilings, Installing WLANs is easy for novice and expert users alike.

Scalability: WLAN topologies are easy to change in various ways from peer-to-peer networks for a small group of users to full infrastructure networks for hundreds of users roaming over a broad area.

Wireless LAN is suitable for difficult-to-wire and frequently changing environments. It's also an ideal solution for mobile workers to access network resource and for setting a temporary LAN when necessary

Wireless LANs can be set as “Ad-hoc” network and “Infrastructure” network. Unlike the “Ad-hoc network”, where users on the LAN send data directly to each other, the “Infrastructure” network includes an access point and users on the “Infrastructure” network send data to that dedicated access point. 11g Wireless Broadband Router uses “Infrastructure” network as Wireless LANs. Each wireless LAN PC within the range of the access point can communicate with other wireless LAN PCs within the range.

1-2 Contents of the 11g Wireless Broadband Router Package

After carefully unpacking the shipping carton, check the contents listed below.



Router



Power Adapter



User's Manual

1. 11g Wireless Broadband Router.
2. Power Adapter.
3. User's Manual

1-3 Features of the 11g Wireless Broadband Router

Your 11g Wireless Broadband Router contains the following features that make it excellent for network connections.

- ✓ Allows multiple users to access the Internet at the same time by providing maximum Internet utilization to multiple users sharing a single public IP Address.
- ✓ Allows users on Ethernet LAN and Wireless LAN to transfer data to each other through wireless-to-wire bridge.
- ✓ Provides wireless access roaming, best access point selection, loading balance, network traffic filtering included in wireless roaming function.
- ✓ Provides 64bits/128bits key WEP (Wired Equivalent Privacy) wireless data encryption to secure wireless communication.
- ✓ Fully supports 802.11 open and shared key authentications.
- ✓ Integrates four 10/100BASE-T/TX auto-sensing switch ports.
- ✓ Uses NAT to allow your entire network's PCs to connect to the Internet using only one (purchased) IP address.
- ✓ Supports PPPoE that enable user to seamlessly connect to ISPs with the familiar "dial-up" connection interface.
- ✓ Built-in web-based user interface for easy configuration and management through common web browsers such as Netscape Communication 6.0 or later and Internet Explorer 5.0 or later.
- ✓ Supports DHCP client to receive both a dynamic IP Address and a fixed IP Address from ISP.
- ✓ Built-in DHCP server to automatically assign and manage LAN IP addresses.

- ✓ Allow administrators to block specific internal users from accessing specified applications or services.
- ✓ Allows external Internet users to access information from the internal target host by setting the Virtual Server.
- ✓ Provides unrestricted two-way communication between one PC on your LAN and certain Internet services such as conferencing, video and gaming applications.
- ✓ Enhances routing performance by using Dynamic and Static routing settings.
- ✓ Allow administrators to change the WAN MAC address of the router.

Compatible with all popular Internet applications.

Chapter 2: Installation

This chapter provides information about your 11g Wireless Broadband Router's physical features and gives step-by-step installation instructions for hardware installation and software configuration.

Front Panel

The following figure shows the front view of the 11g Wireless Broadband Router. The LEDs on the front panel indicate the status of the unit. You can easily view the operation of your 11g Wireless Broadband Router from this panel.

Note: Please refer to the model on your hand to find proper description.

Front Panel




LED	Status	Description
Power:	Green	Steady on when the power is on.
Diag:	Red	Lights up during system checking connections and internal operation when the power is first switched on. If the device works properly, the light should switch off automatically.
WLAN	Green	➤ Steady on when the wireless AP is enabled. When the wireless AP is disabled (through the web-based utility), the LED should remain off.
Link/Act:		➤ Blinking when data is flowing through Wireless AP.
WAN	Green	➤ Steady on when the Ethernet link exists.
Link/Act:		➤ Blinking when data is flowing through this port.

- LAN 1~4 Green ➤ Steady on when the Ethernet link exists.
 Link/Act:
 ➤ Blinking when data is flowing through this port.

Rear Panel & Connections

The following figure shows the rear view of the 11g Wireless Broadband Router and illustrates how the cables connect to the interfaces on the rear panel.

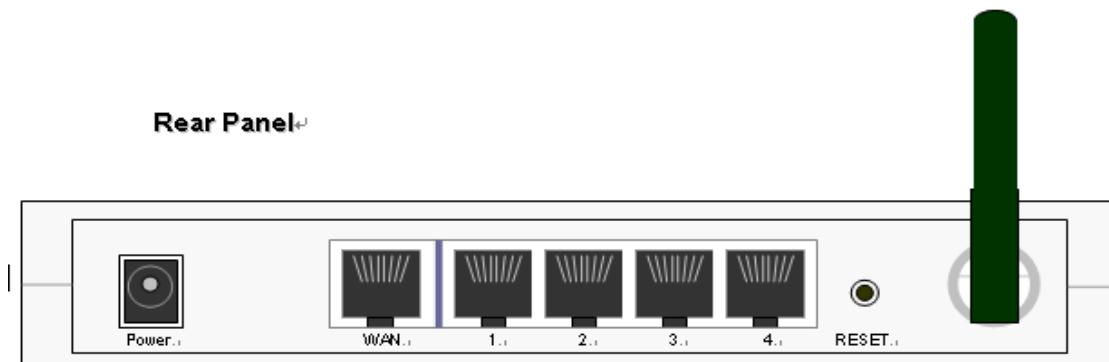

1. Plug one end of the UTP cable into the **WAN** port, the other into the RJ45 Ethernet jack on your ADSL or Cable modem.
2. Connect a PC, which must has an Ethernet NIC (Network Interface Card) installed, to one of the LAN Ports.
3. Connect the external power supply to the 11g Wireless Broadband Router.
4. The **Reset** button is used to reboot and re-initialize the device (press once quickly), or for clearing configuration settings back to factory default values (press for longer than 3 seconds).

Note: If you are Macintosh users, please refer to **Chapter 6 Macintosh Setup** for more detailed information about configuring TCP/IP, hardware installation and so on..

System Requirements

To connect to the Internet, an external ADSL or Cable modem and an Internet access account from an ISP is required. In order to operate with the 11g Wireless Broadband Router, each PC that is to be connected to the 11g Wireless Broadband Router should have the following things installed:

- Ethernet NIC (Network Interface Card: a 10Base-T or 10/100Base-T/TX Ethernet card), or wireless client card for wireless connection
- Standard twisted-pair Ethernet cable (UTP network cable) with RJ-45

connectors

- System OS: Windows 95/98, Windows NT4.0, or Windows 2000/XP
- TCP/IP network protocol
- Web browser, such as Microsoft Internet Explorer 5.0 or later, or Netscape Navigator 6.0 or later

Setting Up the TCP/IP Protocol

If you are not sure whether the TCP/IP Protocol has been installed, follow these steps to check, and if necessary, install TCP/IP onto your PCs.

1. Click the “**Start**” button. Choose “**Settings**”, then “**Control Panel**”. Double-click the “**Network**” icon. Your Network window should appear as follows:



2. Select the “**Configuration**” tab.


Important:

For Windows 2000 & Windows XP Setting, you will find that they differs with Windows 98/ME/NT slightly. See the following for reference.

Click the “**Local Area Connection**” icon on the lower right hand side of your desktop screen.



In the “**Local Area Connection Status**” window, click the “**Properties**” button then your Network window will appear.

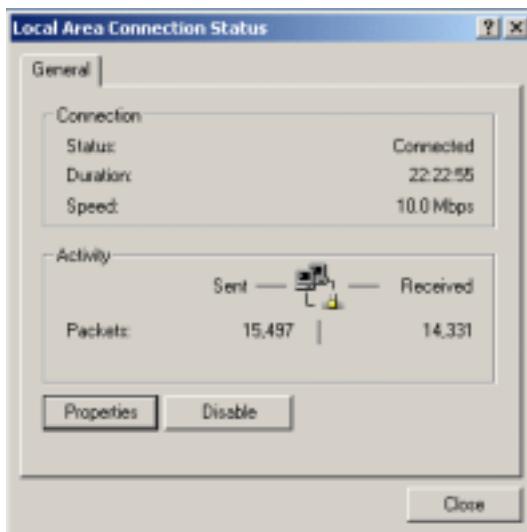


There is only one tab, “**General**”, in the Network window.


3. Check whether the TCP/IP Protocol has already been installed onto your computer’s Ethernet card. Note that TCP/IP Protocol can be installed for a computer’s Dial-Up Adapter as well as for the Ethernet card.
 - If yes, go to step 7.
 - If no, click the “**Add**” button.



4. Double-click “Protocol” in the Select Network Component Type or highlight “Protocol” then click “Add”.

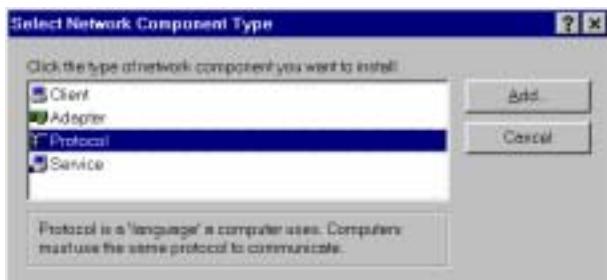

5. Highlight “Microsoft” under the list of manufacturers. Double-click “TCP/IP” from the list on the right or highlight “TCP/IP” then click “OK” to install TCP/IP.

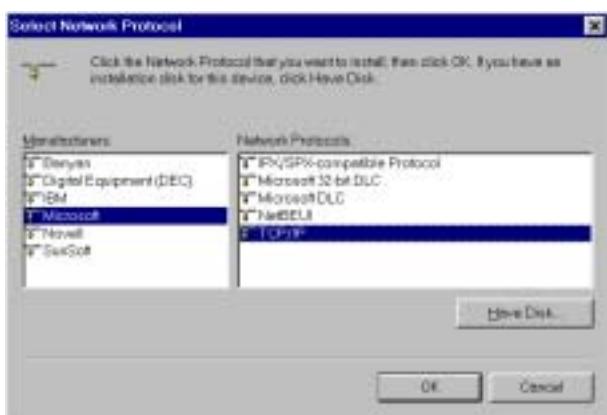

6. After a few seconds, you will be returned to the Network window. The TCP/IP Protocol should now be on the list of installed network components (see 3 above).


7. Click the “**Properties**” button. The TCP/IP Properties window consists of several tabs. Choose the “**IP Address**” tab.
8. Select “**Obtain an IP address automatically**”. Click “**OK**”. Restart your PC to complete the TCP/IP installation.




Fixed IP Addresses Configuration

Fixed IP addresses may be assigned to network devices for many reasons, such as the server PCs or printers which are consistently accessed by multiple users. To set up computers with fixed IP Addresses, go to the “**IP Address**” tab of the “**TCP/IP Properties**” window as shown above.


Select “**Specify an IP address**” and enter “**192.168.1.xxx**” in the “**IP Address**” location (where xxx is a number between 2 and 254 used by the 11g Wireless Broadband Router to identify each computer), and the default “**Subnet Mask** **255.255.255.0**”. Note that no two computers on the same LAN can have the same IP address.

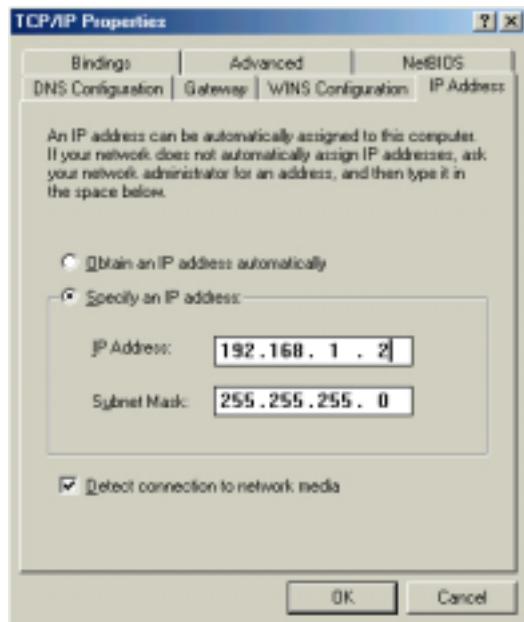

Click on the “DNS Configuration” tab and select “Enable DNS”. Enter the “DNS IP Address” obtained from your ISP in the “Server Search Order” location. Then click the “Add” button.

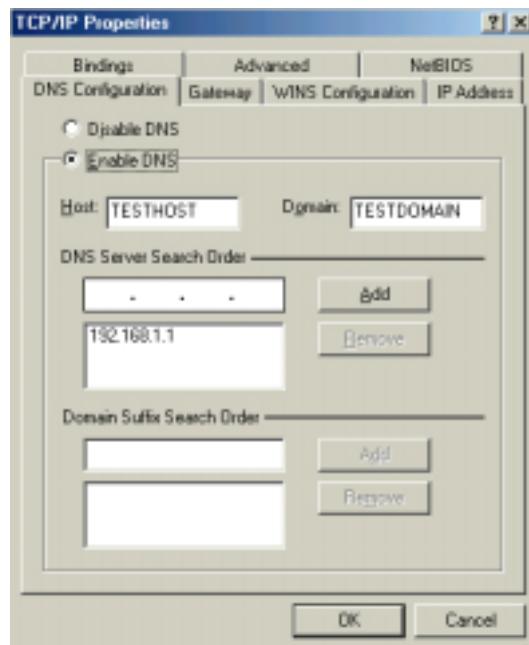

Click on the “Gateway” tab and enter the 11g Wireless Broadband Router’s default gateway value **192.168.1.1** in the “New gateway” field, then click “Add” Button.

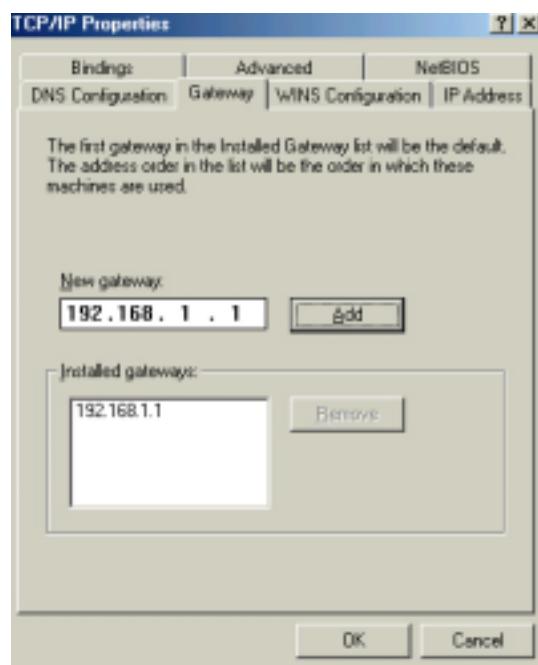

Click “OK”. Restart your PC to complete the TCP/IP installation.

Chapter 3: Internet Access

This chapter describes the procedures necessary to configure the basic functions and begin using your 11g Wireless Broadband Router. If you follow these procedures correctly, there should be no problem in accessing the Internet via your 11g Wireless Broadband Router.

Prepare your network information

In order to allow quick referencing when setting up your 11g Wireless Broadband Router, it is suggested you complete the table below with the necessary information. It should be supplied by your ISP.

Provided by some ISPs	Host Name: Domain Name:
IP address given by ISP:	<input checked="" type="radio"/> Obtain IP Address automatically <input checked="" type="radio"/> Static IP IP Address: _____._____._____._____ Subnet Mask: _____._____._____._____ Default Gateway: _____._____._____._____ DNS Server Primary: _____._____._____._____ DNS Server Secondary: _____._____._____._____ DNS Server Third: _____._____._____._____
PPP authentication:	<input checked="" type="radio"/> PPPoE <input checked="" type="radio"/> PPTP Login Name: _____ Password: _____

Web-based User Interface

Your 11g Wireless Broadband Router is designed to use a Web-based User Interface for configuration. After connecting your router and your computer, please open your web browser and type <http://192.168.1.1> in the browser's *address box*. This address is the factory set IP Address of your 11g Wireless Broadband Router. Press "Enter".



The “**Username and Password Required**” prompt box will appear. Leave the Username field empty and type “**admin**” (default password) in the Password field. Click “**OK**”. The setup screen will then appear.

Basic Configuration – Setup

The “**OnePage Setup**” screen is the first screen you will see when you access the *Utility*. If the router has already been successfully installed and set up, this screen’s values will already be properly configured.

The screenshot shows the "OnePage Setup" configuration interface. It includes fields for Host Name, Domain Name, Time Zone, Private IP Address (Device IP Address and Subnet Mask), Wireless settings (Network Mode, SSID, Channel, and Wireless Security), and WAN Connection Type (Obtain IP automatically). Buttons for Apply and Cancel are at the bottom.

OnePage Setup	
Host Name:	(Required by some ISPs)
Domain Name:	(Required by some ISPs)
Time Zone:	(GMT+09:00) Japan, Korea
Private IP Address	(MAC Address: 00-99-A2-77-88-99)
Device IP Address:	192.168.1.1
Subnet Mask:	255.255.255.0
Wireless	
Network Mode:	Mixed
SSID:	wireless
SSID Broadcast:	<input checked="" type="radio"/> Enabled <input type="radio"/> Disabled
Channel:	9 (Domain: UBA)
Wireless Security:	<input checked="" type="radio"/> Enable <input type="radio"/> Disable WEP Key Setting
WAN Connection Type	Obtain IP automatically (MAC Address: 00-99-A2-77-88-9A) Select the Internet connection type you wish to use
Apply Cancel	

Host Name: This entry is required by certain ISPs.

Domain Name: This entry is required by certain ISPs.

Time Zone: Select the time zone of your location from the drop down list.

Private IP Address: The “Device IP Address” and “Subnet Mask” of the router are used for the internal LAN. The default values are 192.168.1.1 for the IP Address and 255.255.255.0 for the Subnet Mask.

Wireless

Check “**Enable**” or “**Disable**” to make the wireless LAN function active or

inactive.

Network Mode Select “**B-only**” , “**G-only**” or “**Mixed**(as default)”,for network type.

SSID: As the acronym for **Extend Service Set Identifier**, ESSID is the unique name shared among all clients and Wireless Broadband Router in a same wireless network. The ESSID must be identical for all points and must not exceed 32 characters.


SSID Broadcast: Router will broadcast the SSID to let WLANs clients easily search and connect to this wireless router by leaving this item as default setting “**Enable**”. Click “**Disable**” to disable the broadcast.

Channel: Select the appropriate channel number from the drop-down. The permissible channels are different from Regulatory Domains. Make sure that all nodes in the same wireless LAN network use the same channel, or the channel usage is automatic when a connection between client and access point are made.

WEP: As the acronym for **Wired Equivalent Privacy**, WEP is an encryption mechanism used to protect your wireless data communications. WEP uses a combination of 64-bit/128-bit keys to encrypt data that is transmitted between all points in a wireless network to insure data security. To code/decode the data transmission, all points must use the identical key. To make the WEP encryption active or inactive, select “**Mandatory**” or “**Disable**”.

WEP Key Setting: **WEP**

As the WEP is active, click the button of “**WEP Key Setting**” to go to the setting page. Select “**64Bit**” or “**128Bit**” encryption algorithm from the drop-down list. There are two ways to generate WEP key:

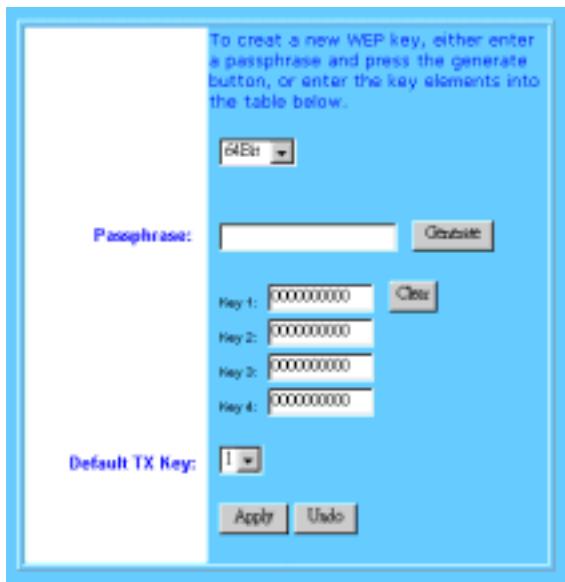

Passphrase Enter a alphanumeric text string in this column then click “**Generate**” button, and four 64-bit encryption key will be created automatically. Note that only one 128-bit key will be generated in 128-bit encryption mode.

Manually You may need to enter the WEP key manually in case to join the existing wireless network. However, if not, the Pass phrase method is recommended. If you are not sure which way to use, check with your network administrator.

Default TX Key Select one of the four keys to be the encryption key you are going to use in the wireless network. To be sure that all the points in a same wireless network have to have the same encryption key.

WPA Shared Key

As the WPA Shared Key is active, Select the type of algorithm (currently, only TKIP is supported), Enter shared key and a Group Key Renewal period.

WPA Algorithm

Select TKIP (AES is not supported) as the type of WPA algorithm

WPA Shared Key

Enter a Shared Key of 8-32 characters


Group Key Renewal

Enter a Group Key Renewal Period, the router will renew the group key again when time is up.



WPA RADIUS

WPA used in coordination with a RADIUS server, This should only be used when a RADIUS server is connected to the Router)

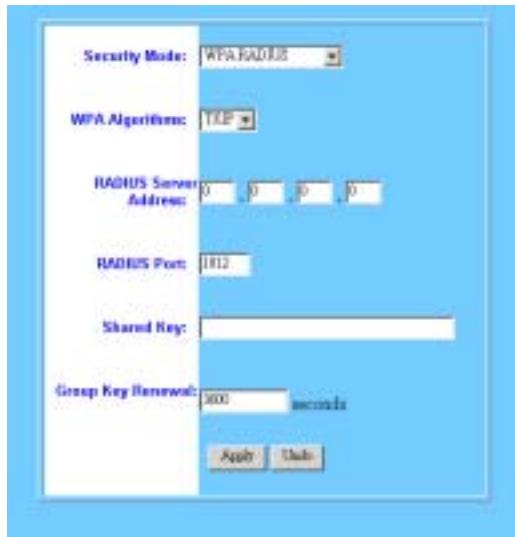

WPA Algorithm

Select TKIP (AES is not supported) as the type of WPA algorithm.

RADIUS Server Address

Enter the RADIUS server's IP Address

RADIUS Port

Enter the RADIUS port number

Shared Key

Enter a key shared between the Router and the sever

Group Key Renewal

Enter a Group Key Renewal Period, the router will renew the group key again when time is up.

WAN Connection Type

There are eight options for WAN connection types, Obtain IP automatically, Static IP, PPPoE,RAS(for SingTel),PPTP,L2TP,HBS,IP Unnumbered(PPPoE)


The connection type you need to choose is dependent upon the settings assigned by your ISP. Which connection type you need to choose may differ from ISPs as well as the service you applied for. It depends on your ISP's assignment. If you are unsure which connection type you currently use, contact your ISP to obtain the correct information.

Obtain IP automatically

It is the **default** option for the router. If your ISP automatically assigns an IP address and other values to the 11g Wireless Broadband Router, leave them there without making any changes.

Static IP

The WAN IP Address and Subnet Mask of the router entered here are used by external users of the Internet (including your ISP). If your ISP assigned a fixed IP address, select this item and enter the IP Address and Subnet Mask provided by your ISP.

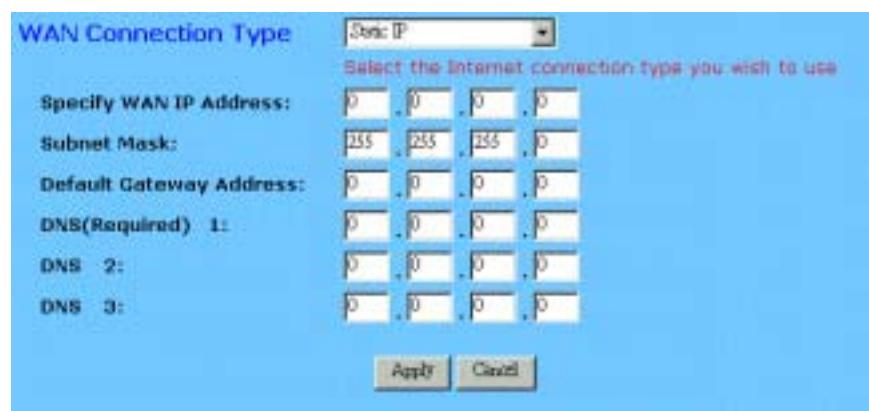

Specify WAN IP Address:

Enter the IP address provided by your ISP.

Subnet Mask:

Enter the subnet mask values provided by your ISP.

Default Gateway IP Address:

Your ISP will provide you with the Default Gateway IP Address.

Domain Name Server (DNS):

Your ISP will provide you with at least one DNS IP Address. Multiple DNS IP settings are common. The first available DNS entry is used in most cases.

PPPoE

PPPoE is a dial-up connection type provided by some ISPs. It is a cost-effective way for a user to access this connection type. If your ISP provides PPPoE connectivity, you should choose this item from the drop-down list. Note that if you select PPPoE, please remove any existing PPPoE application on any PCs on your LAN. Sometimes you have more than one PPPoE available to be accessed concurrently

WAN Connection Type

User Name: Password: Service Name: <input checked="" type="radio"/> Connect on Demand: Max Idle Time <input type="text" value="5"/> Min. <input type="radio"/> Keep Alive: Redial Period <input type="text" value="30"/> Sec.	PPPoE (MAC Address: 00-99-A2-77-98-9A) Select the Internet connection type you wish to use <input type="text"/> <input type="text"/> <input type="text"/>
2nd PPPoE Connection: <input type="button" value="Disable"/> User Name: Password: Service Name: URL Trigger: <input checked="" type="radio"/> Connect on Demand: Max Idle Time <input type="text" value="5"/> Min. <input type="radio"/> Keep Alive: Redial Period <input type="text" value="30"/> Sec.	
<input type="button" value="Apply"/> <input type="button" value="Cancel"/>	

- User Name:** Enter the user name your ISP provides you.
- Password:** Enter the password your ISP provides you.
- Connect-on-demand:** It is a utility used to trigger the PPPoE session when there is a packet being sent through the WAN port while it is in a disconnected situation. Check the radio button to make this function active, and then you must enter the number of minutes you wish the network to remain idle before disconnection occurs in the “**Max Idle Time**” location.
- Service Name** Fill in this if it’s required by your ISP
- Keep Alive:** This function keeps your PPPoE connection enabled even if it remains idle. However, in some situations, PPPoE session cannot be established immediately after disconnection. This is because the system on the ISP’s site may need a little time to restore itself. You may need to check with your ISP to obtain details of how long you need to wait before re-establishing the PPPoE session. Enter this

information in the “**Redial Period**” field.

2nd PPPoE connection

The advantage of multiple PPPoE sessions is that it provides the Service Provider with the ability to offer additional, revenue-enhanced access to content providers. Each connection has its own specific authentication process, a unique set of IP, gateway and Domain Name Servers addresses. If you have another PPPoE connection for specific internet access requirement, you are supposed to fill in the required information.

User Name:	Enter the user name your ISP provides you.
Password:	Enter the password your ISP provides you.
Connect-on-demand:	It is a utility used to trigger the PPPoE session when there is a packet being sent through the WAN port while it is in disconnected situation. Check the radio button to make this function active, and then you must enter the number of minutes you wish the network to remain idle before disconnection occurs in the “ Max Idle Time ” location.
Service Name	Fill in this if it’s required by your ISP.
URL trigger	This is for user to be directed to the specific service provided by other ISP. You are supposed to follow your ISP’s instruction to fill in appropriate information.
Keep Alive:	This function keeps your PPPoE connection enabled even if it remains idle. However, in some situations, PPPoE session cannot be established immediately after disconnection. This is because the system on the ISP’s site may need a little time to restore itself. You may need to check with your ISP to obtain detail of how long you need to wait before re-establishing the PPPoE session. Enter this information in the “ Redial Period ” field.

RAS(for SingTel)

If your ISP uses RAS to establish the connection, you should select this item and follow the steps below.




- User Name:** Enter the user name your ISP provides you.
- Password:** Enter the password your ISP provides you.
- RAS Plan:** Choose the connection method that you want to use.
- Connect-on-demand:** It is a utility used to trigger the RAS session when there is a packet being sent through the WAN port while it is in a disconnected situation. Check the radio button to make this function active, and then you must enter the number of minutes you wish the network to remain idle before disconnection occurs in the “**Max Idle Time**” location.
- Keep Alive:** This function keeps your RAS connection enabled even if it remains idle. However, in some situations, the RAS session cannot be established immediately after disconnection. This is because the system on the ISP’s site may need a little time to restore itself. You may need to check with your ISP to obtain details of how long you need to wait before re-establishing the RAS session. Enter this information in the “**Redial Period**” field.

PPTP

PPTP is the acronym of Point to Point Tunneling Protocol. Usually, it is used to encapsulate other protocols’ packets for transmission over IP network. Some

ISPs use this protocol as way to establish the initial connection between the CPE (end-user side) and DSLAM (ISP side). If your ISP uses PPTP to establish the connection, you should select this item and follow the steps below.

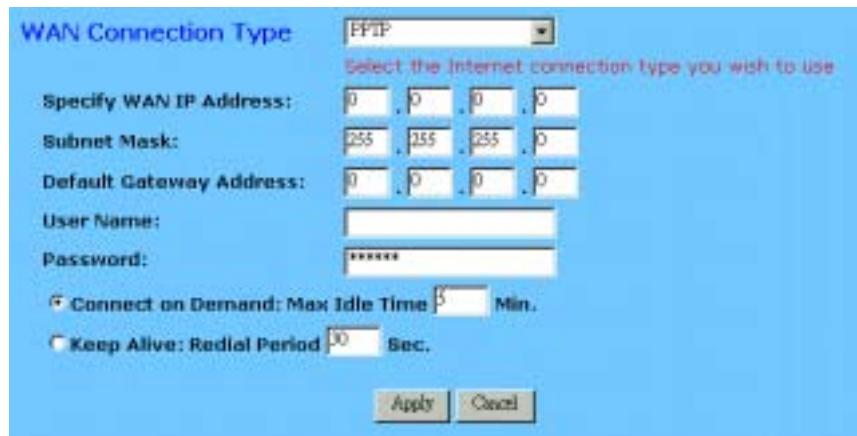

Specify WAN IP Address: Enter the IP address provided by your ISP. If your ISP provides you an Alcatel Speed Touch™ modem, it is suggested that you enter 10.0.0.150 in this column.

Subnet Mask: Enter the subnet mask values provided by your ISP.

Default Gateway IP Address: Your ISP will provide you with the Default Gateway IP Address. If your ISP provides you an Alcatel Speed Touch™ modem, it is suggested that you enter the 10.0.0.138 in this column.

User Name: Enter the user name provided by your ISP.

Password: Enter the password provided by your ISP.


Connect-on-demand: It is a utility used to trigger the PPTP session when there is packet being sent through the WAN port while it is in a disconnected situation. Check the radio button to make this function active, and then you must enter the number of minutes you wish the network to remain idle before disconnection occurs in the "**Max Idle Time**" location.

Keep Alive: This function keeps your PPTP connection enabled even if it remains idle. However, in some

situation, PPTP session cannot be established immediately after disconnection. This is because the system on the ISP's site may need a little time to restore itself. You may need to check with your ISP to obtain detail of how long you need to wait before re-establish the PPTP session. Enter this information in the “**Redial Period**” field.

HBS

If your ISP uses HBS to establish the connection, you should select this item and follow the steps below.

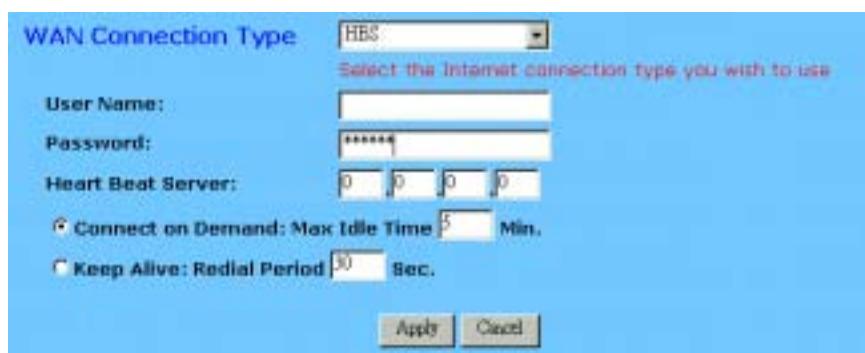

- User Name:** Enter the user name provided by your ISP.
- Password:** Enter the password provided by your ISP.
- Heart Beat Server:** Enter the IP address provided by your ISP. This setting is available only for some areas. Check your ISP for more detailed information.
- Connect-on-demand:** It is a utility used to trigger the HBS session when there is packet being sent through the WAN port while it is in disconnected situation. Check the radio button to make this function active, and then you must enter the number of minutes you wish the network to remain idle before disconnection occurs in the “**Max Idle Time**” location.
- Keep Alive:** This function keeps your HBS connection enable even if it remains idle. However, in some situation, HBS session cannot be established immediately after disconnection. This is because the system on the ISP's site may need a little time

to restore itself. You may need to check with your ISP to obtain detail of how long you need to wait before re-establish the HBS session. Enter this information in the “**Redial Period**” field.

When you have properly configured the Setup page, click “**Apply**”. You can now test to see if the settings are all correct by attempting to connect to the Internet.

IP Unnumbered(PPPOE)

IP unnumbered allows you to do IP processing on a serial interface without assigning an explicit IP address for point-to-point links. If your ISP uses IP Unnumbered(PPPOE) to establish the connection, you should select this item and follow the steps below.



- User Name:** Enter the user name your ISP provides you.
- Password:** Enter the password your ISP provides you.
- Connect-on-demand:** It is a utility used to trigger the IP Unnumbered (PPPoE) session when there is a packet being sent through the WAN port while it is on disconnected situation. Check the radio button to make this function active, and then you must enter the number of minutes you wish the network to remain idle before disconnection occurs in the “**Max Idle Time**” location.
- Keep Alive:** This function keeps your IP Unnumbered (PPPoE) connection enable even if it remains idle.

However, in some situation, PPPoE session cannot be established immediately after disconnection. This is because the system on the ISP's site may need a little time to restore itself. You may need to check with your ISP to obtain detail of how long you need to wait before re-establish the PPPoE session. Enter this information in the “**Redial Period**” field.

Chapter 4: Advanced Applications

This chapter provides information on how to set up and use the advanced functions of your 11g Wireless Broadband router .

4-1 DHCP Configuration

A DHCP (Dynamic Host Configuration Protocol) Server can automatically assign IP Addresses to each computer in your network. Unless you already have one in your LAN, it is highly recommended that you set your router to act as a DHCP server.

DHCP Settings

DHCP Server

Dynamic IP Address: Enable Disable

Starting IP Address: 192.168.1.100

Number of Users: 50

Client Lease Time: 0 minutes (0 means one day)

DNS(Required) 1: 0.0.0.0

DNS 2: 0.0.0.0

DNS 3: 0.0.0.0

WINS: 0.0.0.0

DHCP Client Table Apply Cancel

Dynamic IP Address: Select “**Enable**” to use the DHCP server option of the router. If you already have a DHCP server in your network, set the router’s DHCP option to “**Disable**”.

Starting IP Address: Enter a numerical value, from 2 to 254, for the DHCP server to start at when assigning IP Addresses.

Number of Users: Enter the maximum number of PCs that you want the DHCP server to assign IP Addresses to, with the absolute maximum being 253.

Client Lease Time: Enter the number of time that DHCP clients (The PCs

on LAN side) can use the IP Addresses assigned by Router's DHCP server. Before the time is up, DHCP clients have to request to renew the DHCP information.

DNS: The IP Address of the Domain Name Server, which is currently used. Multiple DNS IP settings are common. The first DNS entry will be used in most cases.

WINS: Windows Internet Naming Service converts NETBIOS name to IP address. The Windows based PCs are assigned NETBIOS names, which have to be transferred into IP addresses if the network transport is TCP/IP. For example, through WINS the two PCs that belong to different subnet can locate each other by name. Enter the IP address of WINS server and it will be assigned to DHCP clients.

DHCP Clients Table Click the DHCP Clients Table button to show current DHCP client information.

Apply Click this button after making any changes for activating the settings.


Cancel Click this button if you are not satisfied with the settings in this page before clicking Apply.

4-2 Access Control

The Access Control feature allows administrators to set up to 20 access policies to block or allow certain users from accessing the Internet or specific applications. Before using this function, the network PCs which you want to control the access limitation should be assigned fixed IP Addresses.

Access Control

The Access Control feature allows administrators to block certain users from accessing the Internet or specific applications. Before using this function, the network PCs which you want to control the access limitation should be assigned fixed IP Addresses.

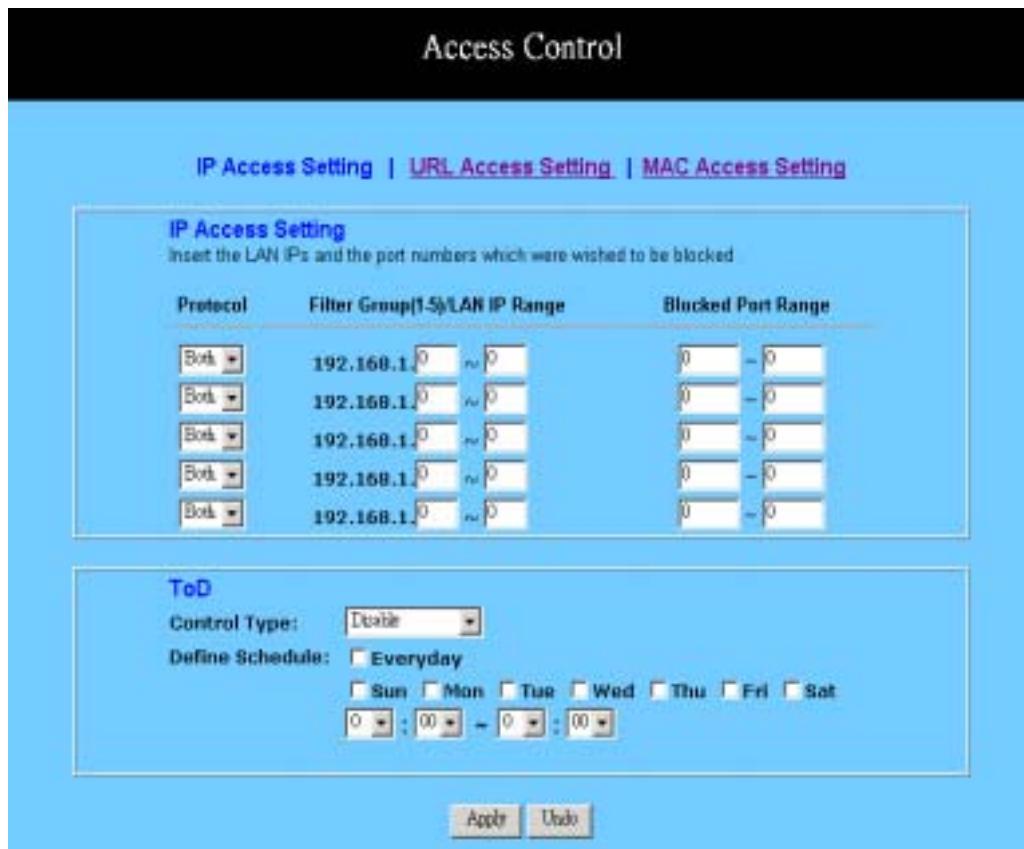

IP Access Setting

This function allows network administrators to restrict up to five groups of specified network users/computers from accessing the certain applications

Protocol: Select the protocol type as “**TCP**” or “**UDP**” from the drop down list. If you are not sure which one to choose, select “**Both**”.

Filter Group/LAN IP Range: Enter the range of IP addresses which you want them to be a controlled group to have the same access limitation.

Block Port Range: Enter the range of port numbers which are used by the applications you wish to be blocked.

Here is an example for the IP Access Setting. Enter the range of **51~80** in the Filter Group column and **20~80** in the Block port Range column, then click “**Apply**” button. As the result, the user’s computers which have IP Addresses in the range of 192.168.1.51 to 192.168.1.80 will not be able to use the applications which use port numbers from 20 to 80, such as FTP, Telnet and

web browsing.

TOD

Control Type:	Select the control type from the drop down list and make this function active. Select “ Block Outbound ” to restrict the connection to the Internet from your LAN. Select “ Block Inbound ” to restrict any external connections from Internet to your LAN servers that were set as virtual servers or as DMZ host. Select “ Block Both ” to restrict both incoming and outgoing connections. Select “ Disable ” to turn off this function.
Define Schedule:	Set a period of time with beginning and ending from the drop down list.
Apply	Click this button after making any changes for activating the settings.
Cancel	Click this button if you are not satisfied with the settings in this page before clicking Apply.

URL Access Setting

To shift to **URL Access Setting**, click on the bold type word to hyperlink to the setting page.

This function allows network administrators to restrict or allow all LAN users to access the web sites that the addresses have been enter to the columns.



URL Access Limit: Check “**Enable**” or “**Disable**” to make this function active or inactive.

Website Access: Check “**Allow**” to allow users on the network to access specific website listed on the location only. In contrast, to restrict users on the network to access the website listed on the location, check “**Block**” in this item.

Block Access Website: Enter the website addresses to be accessed/blocked on the locations. Up to twenty website addresses can be entered into the locations.

Show URL Log: URL Log allows network administrators to check the URL access records. Click the button of “**Show URL Log**” to go to the URL Filter Log table. This table lists the users/computers by their IP Addresses, the access status, and their URL Access destinations.

MAC Access Setting

This function allows network administrators to use the MAC addresses of PCs to restrict users/computers from accessing the Internet.




Filtered MAC Address:

There are fifty sets divided into five groups in this function. You can choose each group by selecting from the pop-down list. Enter the MAC addresses of the computers you wish to block in the columns, and then those users/computers cannot access Internet at all.

4-3 Virtual Server Settings

The Virtual Server Settings application allows you to set up a maximum of ten public services that can be accessed by external users of the Internet, such as a Web Address, Email, FTP etc.. Each service is provided by a dedicated network computer (server) configured with a fixed IP Address. Although the internal service addresses are not directly accessible to the external user, the Wireless Broadband router is able to identify the service requested by the service port number and redirects the request to the appropriate internal IP Address/server. To use this application, it is recommended you use a fixed Public IP Address from your ISP. Note that your Wireless Broadband router supports only one server of any particular type.

This router also support UPnP Forwarding. You can use either Virtual Server Settings or UPnP Forwarding by clicking the button to change setting page. Please note that do not set the same function server to different IP Address in different setting pages.

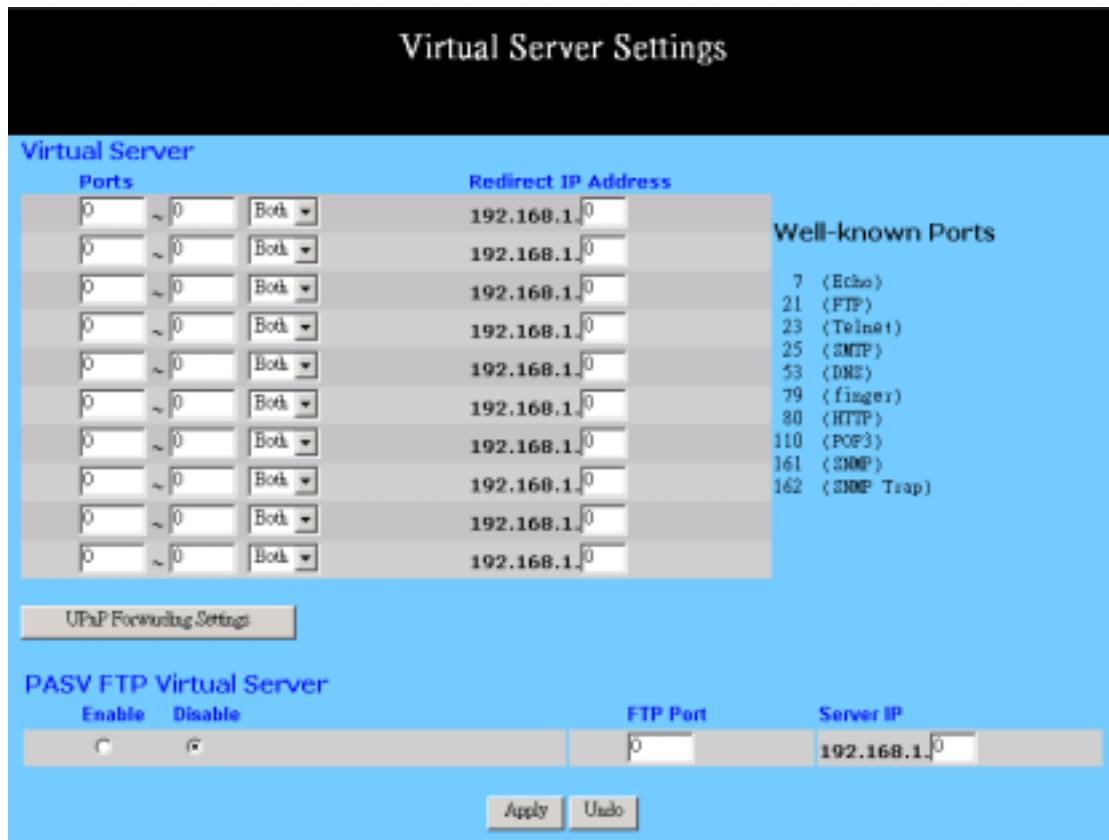

Set up individual network computers to act as servers and configure each with a fixed IP Address.

Note: In the “One Page Setup” screen, ensure the “**Private IP Address**” is set to the Wireless Broadband router’s default setting of 192.168.1.1. If a fixed Public IP Address is to be used, select “**Specify an IP address**” and enter the IP Address and other necessary information provided by your ISP.

Ports: Enter the desired service port numbers in the “**Ports**” fields. You can specify the protocol type as “**TCP**” or “**UDP**” from the drop-down list. If you are not sure which one to select, choose “**Both**”. A selection of well-known service port numbers is provided on this screen.

Redirect IP Address: Enter the appropriate IP Addresses of the service computers in the “**Redirect IP Address**” locations.

Passive FTP Virtual Server: When there is firewall filtering in your network, the Internet user may not be able to access FTP server you set in the LAN side. Setting FTP server at passive mode will be necessary.

Enable/Disable - Click to enable/disable passive FTP

function.

FTP Port - Enter the port number (> 1024) that the FTP server will use as data connection port number. The client side should select passive mode and use the same port number entered here.

Server IP Address - Enter the appropriate IP Addresses of the service computer.

Apply

Click this button after making any changes for activating the settings.

Cancel

Click this button if you are not satisfied with the settings in this page before clicking Apply.

Example:

If the service port number **80~80** (representing an HTTP web address) is entered in “**Ports**” and **192.168.1.100** is entered in “**Redirect IP Address**”, then all HTTP requests from external Internet users will be directed to the PC/server with the 192.168.1.100 fixed IP Address.

Below is a list of the protocol and port ranges that are used by some common applications.

Application	Protocol	Port Range
FTP Server	TCP	21
Half Life	UDP	6003, 7002, 27010, 27015, 27025
MSN Messenger	TCP	6891-6900 (File-send)
	TCP	1863
	UDP	1863
	UDP	5190
	UDP	6901 (Voice)
	TCP	6901 (Voice)
PC Anywhere host	TCP	5631
	UDP	5632
Quake 2	UDP	27910
Quake III	UDP	27660 (first player)
		27661 (second player)
Telnet Server	TCP	23
Web Server	TCP	80

UPnP Forwarding

UPnP (Universal Plug and Play) is a standard introduced from Microsoft and UPnP Forum for interoperability. Currently, this function supported by this device allows you to set virtual server from Windows OS that supports UPnP, such as Windows XP.

UPnP Forwarding						
UPnP Function:		<input checked="" type="radio"/> Enable <input type="radio"/> Disable				
UPnP Control:		<input checked="" type="radio"/> Enable <input type="radio"/> Disable				
Application Name	Ext. Port	Protocol TCP	UDP	Int. Port	IP Address	Enable
FTP	21	<input checked="" type="radio"/>	<input type="radio"/>	21	192.168.1.0	<input type="checkbox"/>
Telnet	23	<input checked="" type="radio"/>	<input type="radio"/>	23	192.168.1.0	<input type="checkbox"/>
SMTP	25	<input checked="" type="radio"/>	<input type="radio"/>	25	192.168.1.0	<input type="checkbox"/>
DNS	53	<input type="radio"/>	<input checked="" type="radio"/>	53	192.168.1.0	<input type="checkbox"/>
TFTP	69	<input type="radio"/>	<input checked="" type="radio"/>	69	192.168.1.0	<input type="checkbox"/>
finger	79	<input checked="" type="radio"/>	<input type="radio"/>	79	192.168.1.0	<input type="checkbox"/>
HTTP	80	<input checked="" type="radio"/>	<input type="radio"/>	80	192.168.1.0	<input type="checkbox"/>
POP3	110	<input checked="" type="radio"/>	<input type="radio"/>	110	192.168.1.0	<input type="checkbox"/>
NNTP	119	<input checked="" type="radio"/>	<input type="radio"/>	119	192.168.1.0	<input type="checkbox"/>
SNMP	161	<input type="radio"/>	<input checked="" type="radio"/>	161	192.168.1.0	<input type="checkbox"/>
	0	<input type="radio"/>	<input checked="" type="radio"/>	0	192.168.1.0	<input type="checkbox"/>
	0	<input type="radio"/>	<input checked="" type="radio"/>	0	192.168.1.0	<input type="checkbox"/>
	0	<input type="radio"/>	<input checked="" type="radio"/>	0	192.168.1.0	<input type="checkbox"/>
	0	<input type="radio"/>	<input checked="" type="radio"/>	0	192.168.1.0	<input type="checkbox"/>
	0	<input type="radio"/>	<input checked="" type="radio"/>	0	192.168.1.0	<input type="checkbox"/>

[Return to Virtual Server](#)

[Apply](#) [Cancel](#)

UPnP Function:

Check “**Enable**” will allow LAN side PCs that support UPnP to set virtual server.

Before you enable the UPnP Forwarding, you have to set up individual network computers to act as servers and configure each with a fixed IP Address.

In the “One Page Setup” screen, ensure the “**Private**

IP Address” is set to the Router’s default setting of 192.168.1.1. If a fixed Public IP Address is to be used, select “**Specify an IP address**” and enter the IP Address and other necessary information provided by your ISP.

UPnP Control:

Check “**Enable**” will allow LAN side PCs that support UPnP to directly configure the settings provided in this page.

Application Name

UPnP has ten pre-setting forwarding rules, which are well-known applications. You can enter any name to present the additional settings beside those pre-setting rules.

Ext. Port

Most of applications usually use their individual port number for its incoming and outgoing data packets. However, some of the application may use different port number for incoming and outgoing data packets. In this case, you have to enter the port number used by incoming data packets here.

Protocol

Specify the protocol type as “**TCP**” or “**UDP**” which is used by specific service.

Int. Ports

Most of applications usually use their individual port number for its incoming and outgoing data packets. However, some of the application may use different port number for incoming and outgoing data packets. In this case, you have to enter the port number used by outgoing data packets here.

IP Address

Enter the appropriate IP Addresses of the service computers in the “**IP Address**” locations.

Enable

Check to make this forwarding setting active.

Apply

Click this button after making any changes for activating the settings.

Cancel

Click this button if you are not satisfied with the settings in this page before clicking Apply.

Example: If the service port number **80~80** (representing an HTTP web address)

is entered in “**Ports**” and **192.168.1.100** is entered in “**IP Address**”, then all HTTP requests from external Internet users will be directed to the PC/server with the 192.168.1.100 fixed IP Address.

4-4 DMZ Host

The DMZ Host application allows unrestricted 2-way communication between a single LAN PC and other Internet users or servers. This application is useful for supporting special-purpose services such as video-conferencing and gaming, that require proprietary client software and/or 2-way user communication.

To use this application, you must first obtain a fixed Public IP Address from your ISP. Note that in order to provide unrestricted access, the Firewall provided by the Wireless Broadband router to protect this port is disabled, thus creating a potentially serious security risk.

It is recommended that this application is disabled when it is not in use by entering “**0**” in the “**DMZ Host**” field.

The Multi DMZ allows you to map the public IP addresses to your LAN PCs, should you get more than one public IP address from your ISP. This function is useful to set up your servers, such as an FTP server, web server, and so on, with public IP addresses, but still keep them within your LAN group.

With the public IP addresses, Internet users will access your servers more easily and those servers can still communicate with other PCs in your LAN by using Network Neighborhood.

DMZ (Demilitarized Zone) Host

This feature will open all in/out accesses for one LAN computer, especially for **Internet game** application. Besides, this is useful for machines that host TCP/IP services that should be fully exposed to the public network. Please enter one LAN IP Address below. Activate this feature only when required. (0 is inactive)

DMZ Host:

Multi DMZ: **(For fixed IP only)**

WAN IP:	LAN IP:
0 . 0 . 0 . 0	192.168.1.0
0 . 0 . 0 . 0	192.168.1.0
0 . 0 . 0 . 0	192.168.1.0
0 . 0 . 0 . 0	192.168.1.0
0 . 0 . 0 . 0	192.168.1.0

Apply **Cancel**

Before setting up a LAN PC to act as a DMZ Host, you should configure it

using a fixed IP Address.

Note: In the “One Page Setup” screen, ensure the Private IP Address is set to the Wireless Broadband router’s default setting of 192.168.1.1. In the Public IP Address area, select “Specify an IP Address”, and then enter the IP Address and other necessary information provided by your ISP.

Click the “DMZ Host” option in the Advanced Menu and enter the fixed IP Address of the Exposed Host PC in the “DMZ Host” IP Address location. Remember, entering “0” will disable this application.

Multi DMZ

1. Enter the valid public IP address in “WAN IP” column. Next, enter the private IP address of the PC that you wish to map to in “LAN IP” field. Up to five public IP addresses can be entered.
2. Click the “Apply” button after making any changes, or click the “Cancel” button to exit the screen without saving any changes.

4-5 Dynamic Routing

The Dynamic Routing feature allows your Wireless Broadband router to exchange routing information with other routers in the network. Enabling this feature is likely to enhance performance of your Wireless Broadband router.



- TX:** From the drop-down list, select one of the routing information types, “RIP-1”, “RIP-1 Compatible”, or “RIP-2”, to enable the “TX” (transmit) function. “RIP-1” is the protocol used by older routers. Newer routers should use “RIP-2”. “RIP-1 Compatible” servers to broadcast RIP-1 and multicast RIP-2.
- RX:** From the drop-down list, select one of the routing information types, “RIP-1” or “RIP-2”, to enable the

“RX” (receive) function.

Show Routing Table: Click this button after clicking Apply to see current routing information.

Apply: Click this button after making any changes for activating the settings.


Undo: Click this button if you are not satisfied with the settings in this page before clicking Apply.

Below is Routing Table Entry List. This table shows the status for routing information. You can click Refresh to update the table information.


Routing Table Entry List				
Destination LAN IP	Subnet Mask	Default Gateway	Hop Count	Interface
192.168.1.0	255.255.255.0	0.0.0.0	1	LAN

4-6 Static Routing

The Static Routing feature allows PCs that are connected to the Wireless Broadband router, either directly or through a hub/switch (in the immediate LAN), to communicate with other PCs in the respective LAN segment which are connected to the Wireless Broadband router through another router (destination LAN). Up to 20 route entries may be input into the Wireless Broadband router. The diagram below gives an example of the physical connections required to use Static Routing.

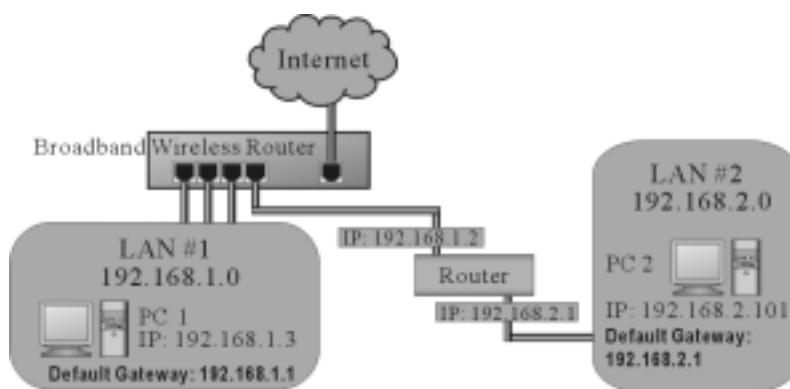

In the above diagram, PC2 in LAN#2 is connected to the Wireless Broadband router via another router while PC1 in LAN#1 is connected to the Wireless Broadband router directly. Without configuring the Static Routing function, the two PCs would not be able to communicate with each other.

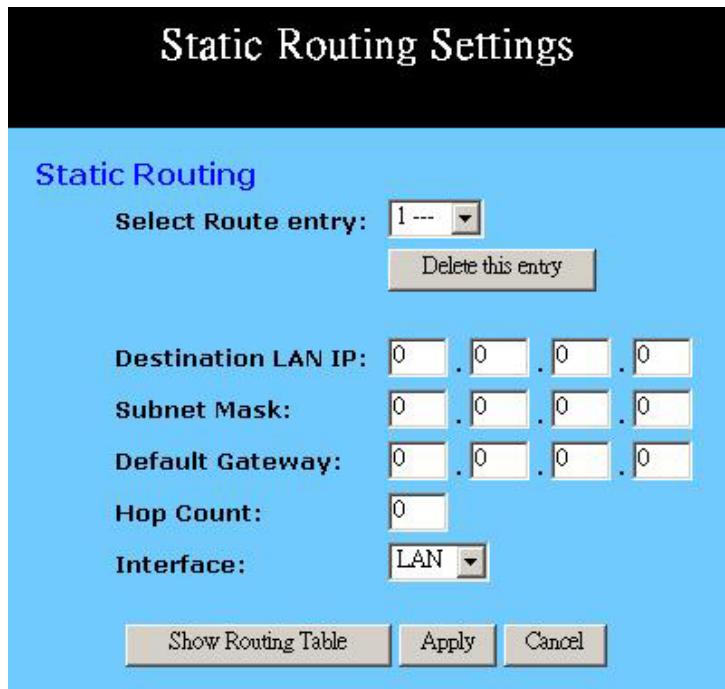

- Select Route entry:** Select the route entry number from 1 to 20 that you wish to configure.
- Delete this entry** Delete the selected route entry information.
- Destination LAN IP and Subnet Mask:** Enter the IP Address and Subnet Mask of the destination LAN that the immediate LAN is to communicate with. Taking the above diagram as an example, enter **192.168.2.0** in the “**Destination LAN IP**” field and **255.255.255.0** in the “**Subnet Mask**” field.
- Default Gateway:** Enter the IP Address of the router that forwards data packets to the destination LAN. For the above example, enter **192.168.1.2** in the “**Default Gateway**” field.
- Hop Count:** Enter the number of hops required between the LANs to be connected. The Hop Count represents the “cost” of the routing transmission. The default value is 1.
- Interface:** Choose **LAN** if the Destination LAN is on your Router’s LAN side and choose **WAN** if the Destination LAN is on the Router’s WAN side.
- Show Routing Table** Click this button after clicking Apply to see current routing information.

Apply

Click this button after making any changes for activating the settings.

Cancel

Click this button if you are not satisfied with the settings in this page before clicking Apply.

Referring back to the above diagram, with the proper settings, PC1 would be able to access LAN 1, LAN 2 and the Internet while PC2 can only access LAN 2, LAN1.

4-7 Special Applications

Some applications use multiple TCP/UDP ports to transmit data. Due to the NAT, these applications cannot work with the Wireless Broadband router. Port Triggering allows some of these applications to work properly. Note that only one PC can use each Port Triggering setting at any time.

Special Applications

Existing Special Applications

Application Name	Outgoing Port Range	Incoming Port Range
1:	[0 ~ 0]	[0 ~ 0]
2:	[0 ~ 0]	[0 ~ 0]
3:	[0 ~ 0]	[0 ~ 0]
4:	[0 ~ 0]	[0 ~ 0]
5:	[0 ~ 0]	[0 ~ 0]
6:	[0 ~ 0]	[0 ~ 0]
7:	[0 ~ 0]	[0 ~ 0]
8:	[0 ~ 0]	[0 ~ 0]
9:	[0 ~ 0]	[0 ~ 0]
10:	[0 ~ 0]	[0 ~ 0]

Apply **Cancel**

Application name: Enter the name of application you wish to configure in the Name column to identify this setting.

Outgoing Port Range: Enter the port number or range numbers this

application uses when it sends packets outbound. The Outgoing Port Numbers act as the trigger. When the Wireless Broadband router detects the outgoing packets with these port numbers, it will allow the inbound packets with the Incoming Port Numbers that you set in the next column to pass through the Wireless Broadband router.

Incoming Port Range: Enter the port number or range numbers the inbound packets carry.

Apply

Click this button after making any changes for activating the settings.

Cancel


Click this button if you are not satisfied with the settings in this page before clicking Apply.

The following is a list of port numbers used on some popular applications:

Application	Outgoing Control	Incoming Data
Battle.net	6112	6112
DialPad	7175	51200, 51201, 51210
ICU II	2019	2000-2038, 2050-2051 2069, 2085, 3010-3030
MSN Gaming Zone	47624	2300-2400, 28800-29000
PC to Phone	12053	12120, 12122, 24150-24220
Quick Time4	554	6970-6999
wowcall	8000	4000-4020

4-8 Wireless Setting

This setting page allows you to configure advanced wireless functions. To set those items needs more technology background. Unless you really understand those technical terms, it would be better to leave them as default setting.

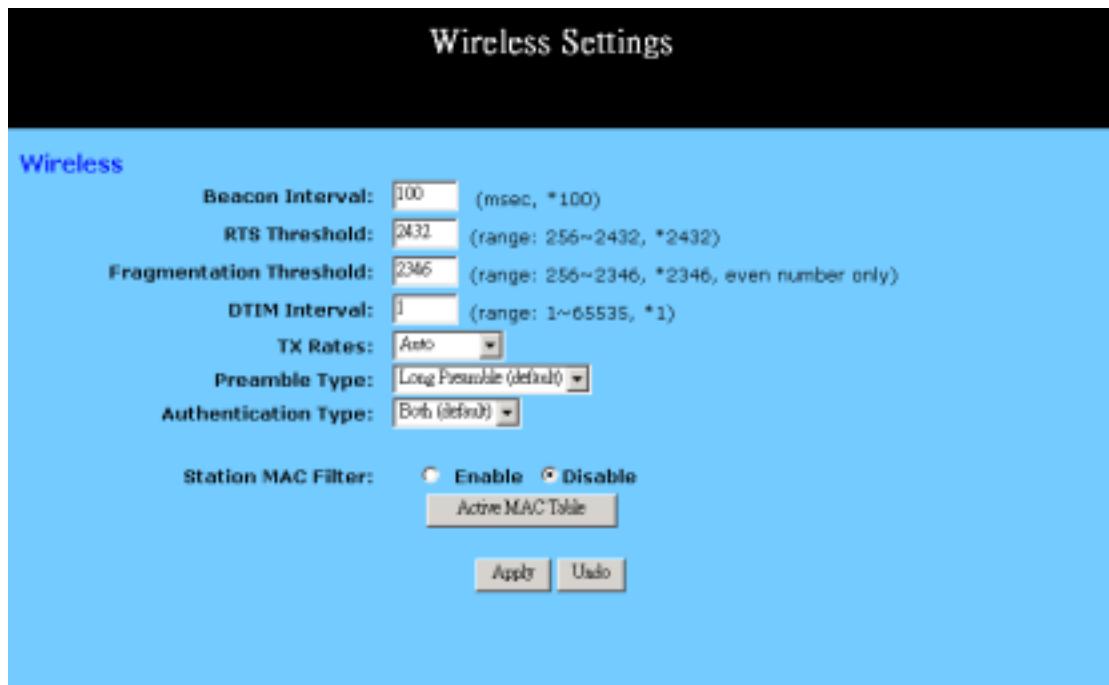

- Beacon Interval:** It's the signal sent periodically by wireless access point to provide synchronization among the stations in wireless LAN.
- RTS Threshold:** RTS packet is used to account for potential hidden stations. This feature allows you to set the size of RTS packet.
- Fragmentation Threshold:** If the length of data frame needing transmission exceeds the fragmentation threshold you set in the column, the data frame will be fragmented. If there is significant interference or high utilization in your wireless network, the smaller fragmentation value can increase the reliability of transmission. However, it is more efficient to set the large fragment size.
- DTIM Interval:** DTIM is the acronym of Delivery Traffic Indication Message. It determines how often the MAC Layer forward multicast traffic.
- Transmission Rate:** Leave "Auto" setting as default or select other speed you wish to use.
- Preamble Type:** Leave "Long Preamble" as default setting or select other type to compatible with special setting your client devices use.
- Authentication Type:** Select either Open System or Shared Key as authentication

type. If you are not sure, select both.

- Station MAC Filter** This function allows you to restrict wireless users to access Internet. As for the MAC table, you need to click "Active MAC Table" button, entering to the "Wireless Active MAC table" page, press "Update Filter List" button and update the list again.
- Active MAC Table** The "Active MAC Table" shows the MAC addresses of wireless clients, which have the same ESSID and WEP key with Wireless Broadband router. When the "MAC Filter" function is disabled, the background color is gray. Click the "Active MAC Table" button will display all MAC addresses of wireless nodes on your WLAN.

Wireless Active MAC Table			Refresh
Station	MAC Address	Add to Filter List	
1	00-A0-C5-B1-44-76		
Update Filter List			

If the MAC Filter function is enabled and the MAC addresses showing in this table have been entered into the "Update Filer List" table, the background color of those MAC addresses will be green. Otherwise, it should be red. If the MAC addresses have been blocked (check the Filter field beside the MAC address in Update Filter List table), the background color will be yellow.

- Update Filter List:** This function allows you to restrict wireless users to access Internet.
Click "Update Filter List" button to open the edit table.

Wireless MAC Entry: 1-10		
Station	MAC Address	Filter
1:	P	<input type="checkbox"/>
2:	P	<input type="checkbox"/>
3:	P	<input type="checkbox"/>
4:	P	<input type="checkbox"/>
5:	P	<input type="checkbox"/>
6:	P	<input type="checkbox"/>
7:	P	<input type="checkbox"/>
8:	P	<input type="checkbox"/>
9:	P	<input type="checkbox"/>
10:	P	<input type="checkbox"/>

Apply **Undo**

Wireless MAC Entry There are 32 sets divided into four groups in this function. You can choose each group by selecting from the pop-down list. Enter the MAC addresses of the computers you wish to block in the columns and click the Filter field beside the MAC address, and then that user will be blocked to link to WLAN and Internet. If the “Filter” field isn’t checked, that MAC address won’t be blocked. The MAC address entered here should be 12 continue alphanumeric digits without “-“ in between. Click “Apply” to save these changes.

Apply

Click this button after making any changes for activating the settings.

Cancel

Click this button if you are not satisfied with the settings in this page before clicking Apply.

4-9 DDNS

“DDNS” is an acronym for Dynamic Domain Name Service. Whenever you set up the web servers, mail servers, or sometimes ftp servers, you need “**Domain Name**” to help Internet users reach your servers easily.

Internet actually runs on IP Addresses which are numerical order, for example “66.37.215.53”. These IP Address identify the location of each device connected to Internet. However, the human brain does not easily remember this numbering system, so a system that allocate domain name such as “www.dyndns.org” provides an easier method. If you type “66.37.215.53” or “www.dyndns.org” in the web browser’s address bar, the browser will show the same web page. This is because both methods relate to the same web server. The “**Domain Name Servers**” used to manage the Internet will translate “www.dyndns.org” into the IP Address “66.37.215.53” in order to allow your browser to find the web server and display the correct web page in your browser.

If your “WAN Connection Type”, as shown in One Page Setup section, is “Obtain IP Address Automatically”, “PPPoE”, or “PPTP” with dynamic IP address assigned by ISP, it will cause an error when you set up the public computer servers in your LAN side PCs. Internet users may not be able to reach your servers because your WAN side IP address may change each time you initiate the connection to your ISP. The DDNS function will help to map your IP address to your domain name when your ISP assigns a new dynamic IP Address.

Note that this DDNS function acts as the client appliance of DDNS service and is only able to be used in conjunction with the service provided by DynDNS.org. Before you begin using this function, you will need to apply to DynDNS.org (or 3322.org) to be able to use the service. Please visit www.dyndns.org (or www.3322.org) for further information.

DDNS Settings

DDNS service allows you to assign a fixed domain name to a dynamic WAN IP address. This allows you to host your own Web, FTP or other type of TCP/IP server in your LAN.

Before configuring DDNS, you need to visit www.dyndns.org and register a domain name. (The DDNS service is provided by DynDNS.org)

DDNS Server Select: dyndns.org 3322.org
DDNS Services: Enable Disable

Username: (max. 15 characters)
Password: (max. 30 characters)
Host Name:

Your IP Address : 0.0.0.0

Status : DDNS server is currently closed.

Apply **Update**

DDNS Server Select Check the “**DDNS Server**”(dyndns.org or 3322.org) you register the domain name

DDNS Service: Check the “**Enable**” option if you wish to activate this function.

Username: After you have applied for the DDNS service from DynDNS.org, you will be issued with a Username. Enter this username in the “**Username**” field.

Password: DynDNS.org, will also issue you with a password. Enter the detail in the “**Password**” field.

Host Name: DynDNS.org, will provide you with a Host Name. Enter this name in the “**Host Name**” field.

Your IP Address	It displays the IP Address currently assigned by your ISP.
Status:	This displays the current status of the DDNS function.
Apply	Click this button after making any changes for activating the settings.
Update	After clicking Apply to invoke the DDNS settings, you have to click this button to refresh the settings..

Chapter 5: Management

This chapter provides information on using Macintosh computers in your network. The instructions given here are for system software version 8.0 or above, which comes with the TCP/IP Protocol preloaded and supports DHCP Addressing.

5-1 Device Administration Settings

This feature allows the administrator to manage the Wireless Broadband router by setting certain parameters. For security reasons, it is strongly recommended that you set Passwords and so that only authorized persons are able to manage this Wireless Broadband router. If the Password is left blank, all users on your network can access this router simply by entering the unit's IP Address into their web browser's location window.

Device Administration Settings

Administrator Password

 Password Change:

 Password Confirm:

SNMP Function Enable Disable

 SNMP Community 1:

 SNMP Community 2:

 SNMP Community 3:

 SNMP Community 4:

 WAN Mac Change: (original: 00-90-A2-77-88-8A)

 External Admin.: Enable Disable

 MTU: Enable Disable Size:

 Block WAN Request: Enable Disable

 IPSec Pass Through: Enable Disable

 PPTP Pass Through: Enable Disable

 PPPoE Pass Through: Enable Disable

 UPnP Function: Enable Disable

 Remote Upgrade: Enable Disable

 Factory Defaults: Yes No

Administrator Password:	Enter the password you want to use into the “ Password Change ” field and re-enter it into the “ Password Confirm ” field for confirmation. Be sure that the password is less than 64 characters long and without any special characters or spaces..
SNMP Function:	As with the Password, SNMP community allows authorized persons to access this router through the SNMP Management tool. The Wireless Broadband router provides three fields to enter these communities. The default words <i>Public</i> and <i>Private</i> are well-known communities that allow authorized persons who know the IP Address of this router to access the read-only information about this router or have the authority to change the configuration. Also, the administrator can define any specific community and configure its limits as Read-Only or Read-Write from the right side drop-down box.
WAN MAC Change:	The WAN MAC address can be changed from the original values if necessary. Some ISPs require users to change the WAN MAC address to a registered one when users change their access equipment.
External Admin.:	Check “ Enable ” to allow you to configure the Wireless Broadband router from the WAN side. To access the setting page from the external side, enter “ http://<WAN IP Address>:8080 ” into the web browser address bar and press the “ Enter ” key.
MTU:	Check Enable if you want to set a maximum limitation for incoming and outgoing packet size. Enter the maximum packet size you wish to set in the “ Size ” column.
Block WAN Request:	To prevent hacker intruding your network, check the Enable option to enable this function to reject all the unauthorized requests from WAN side.
IPSec Pass Through:	Check the Enable to allow the IPSec packets to pass through the Wireless Broadband router if there is T ANI

through the Wireless Broadband router if there is LAN PC using IPSec for data communication with other Internet device.

PPTP Pass Through: Check the **Enable** to allow the PPTP packets to pass through the Wireless Broadband router if there is LAN PC using PPTP for data communication with other Internet device.

PPPoE Pass Through: Check the **Enable** to allow the PPPoE packets to pass through the Wireless Broadband router if there is LAN PC using PPPoE for data communication with other Internet device.

Remote Upgrade: Check **Enable** if you want to allow the authorized remote users to upgrade firmware from WAN side.

Reset Device: Select “**Yes**” if you want to clear a connection, reboot, and re-initialize the unit without affecting any of your configuration setting.


Factory Defaults: Select “**Yes**” if you want to return all the router’s current settings to their factory defaults. Note that do not restore the factory defaults unless it is absolutely necessary.

Apply Click this button after making any changes for activating the settings.

Cancel Click this button if you are not satisfied with the settings in this page before clicking Apply.

5-2 Status Monitor

This screen shows the router’s current status. All of the information provided is read-only.

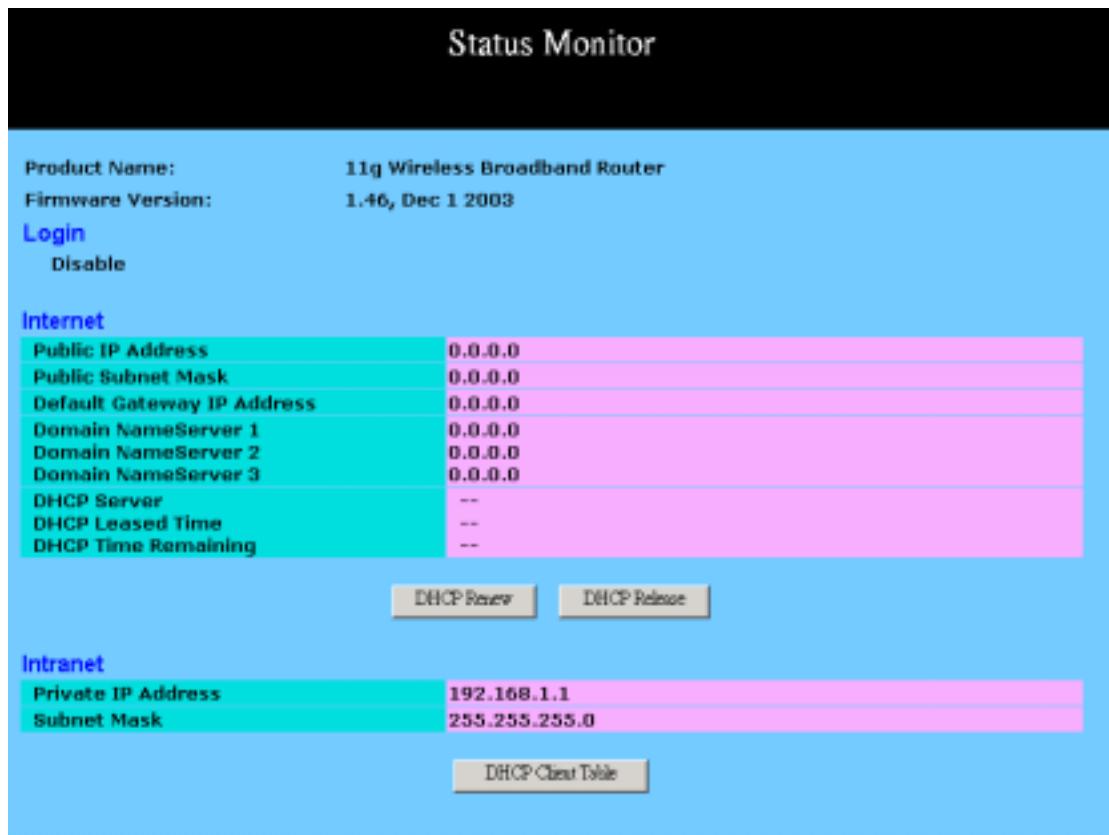

- Product Name:** This field shows the name of this router.
- Firmware Version:** This field shows the installed version of the firmware.
- Login:** This column shows the login information of PPPoE or PPTP. You can manually initiate the connection or make a disconnection by clicking the appropriate buttons. Be aware that, if you make a disconnection here, “**Connect-on- demand**” will not function until the connection button is clicked. Note that “Login” won’t show any information if you selected “**Obtain IP automatically**” or “**Static IP**” on the OnePage Setup page.
- Internet:** This section shows the WAN Connection Type settings status of the router as seen by external users of the Internet. If you selected “**Get IP Address Automatically**”, “**PPPoE**”, or “**PPTP**” in the OnePage Setup, the “**IP Address**”, “**Subnet Mask**”, “**Default Gateway**”, and “**Domain Name Server**” (DNS) will show the information retrieved from the DHCP server or ISP which is currently being used. If

you selected “**Static IP**” in “One Page Setup: Public IP Address”, the information will be the same as your input.

DHCP Release: Click this button to eliminate the IP address obtained from DHCP server.

DHCP Renew: Click this button to refresh the IP address from DHCP server.


Note that the “DHCP Release” and “DHCP Renew” button only show up when you select “**Get IP Address Automatically**” in the OnePage Setup.

Intranet: This section displays the current “**Private IP Address**” and “**Subnet Mask**” of the router, as seen by users of your internal network.

DHCP Clients Table: If the router is setup to act as a DHCP server, the LAN side IP Address distribution table will appear by clicking this button.

5-3 Log

The Log application provides the administrator with the ability to trace Internet connection. With viewing the Log information, an administrator can send the record to a specific LAN PCs to have the real time monitor.

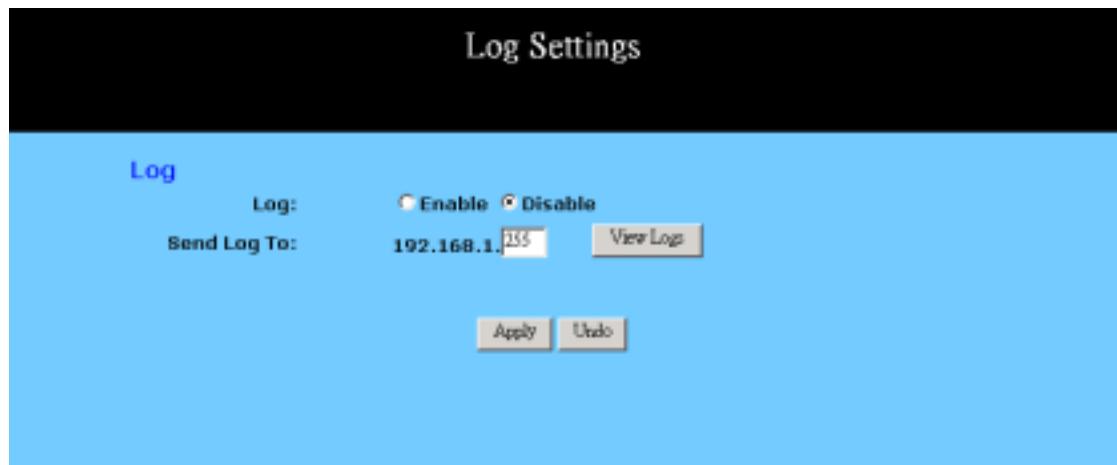

Log: Check the “**Enable**” option if you want to activate this function.

Send Log To: Enter the IP address of the PC that you wish to use to

view the Log information.


View Log: Click this button to view the log on-line.

Apply Click this button after making any changes for activating the settings.

Cancel Click this button if you are not satisfied with the settings in this page before clicking “Apply”.

5-4 Backup & Restore

This function allows you to save router's configuration as backup, or retrieve the configuration file you saved before to turn the setting back.

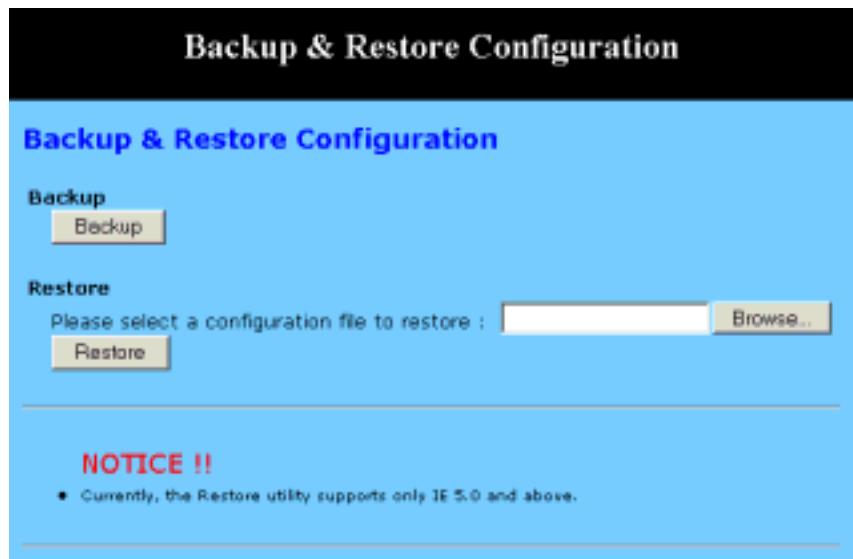

Backup: Click “Backup” button save the current configuration as a backup file in your hard disk.

Restore: Enter path of the configuration file you saved on the PC. You can click “Browse” to view the folders and select the file. Click “Restore” to retrieve it.

5-5 Upgrade Firmware

This setting page allows you to upgrade the latest version firmware to keep your router up-to-date. Before you upgrade the firmware, you have to get the latest firmware and save it on the PC you use to configure the router.



Browse..

To select a file to upgrade, you have to enter path of the latest firmware you saved on the PC. You can choose “**Browse**” to view the folders and select the firmware.

Upgrade

After you enter or select the path, click “**Upgrade**” to start the firmware upgrade process.

Note that ***don't power off the router during the firmware upgrading***, otherwise the incompletion of firmware upgrading will cause serious damage to the integrity of the router's firmware that will lead to fail to boot the router again.

5-6 Diagnostic-Ping/Tracert

This function allows you to test the connection between router and LAN or between router and Internet.

Ping

Source IP:	192.168.1.1
Destination IP:	192.168.1.0
Packet Number:	1 (1 ~ 4)
Packet Size:	60 (60 ~ 1514)
Time Between:	1000 (milliseconds)
Timeout:	5000 (milliseconds)
<input type="button" value="Start"/>	
Ping Result:	
Pkt Sent: 0	
Pkt Recv: 0	
Avg Rtt: 0	

Source IP:	You can chose to issue the ping test from the LAN side by selecting Router's private IP Address or from the WAN side by selecting Router's WAN IP Address.
Destination IP:	Enter the IP Address of destination device you want to ping. If Router's LAN IP address is selected as Source IP, you only can ping LAN side device and vice versa.
Packet Number:	Enter the packet numbers you wish to use to ping the destination device. The maximum numbers are four.
Packet Size:	Enter the numbers of packet size you wish to use to ping the destination device. The maximum packet sizes are 1514.
Time Between	Enter the numbers of time between two packets.
Time out:	Enter the number of time regarding as no response after starting to ping the destination device.
Start:	Click this button to begin the ping test.
Ping Result:	The result will show the numbers of sending packet, numbers of packet receiving, and the average return time.

Tracert



Tracert Host:	Enter the IP Address of destination device that you wish to trace the route between Router and that device.
Trace Message:	The result shows the routing information between

Router and destination device.

Tracert: Click “Tracert” to start this test.

Chapter 6: Macintosh Setup

This chapter provides information on using Macintosh computers in your network. The instructions given here are for system software version 8.0 or above, which comes with the TCP/IP Protocol preloaded and supports DHCP Addressing.

6-1 Hardware Connections

Connect your Macintosh computer to your 11g Wireless Broadband router . If you have a newer computer, there will be a Ethernet port on the back. Older computers will need to have an Ethernet card installed. See your computer's User's Manual for instructions on Ethernet card installation.

6-2 Computer Network Configuration

It is assumed that your computer's system software already has TCP/IP installed. You may manually configure your computer with a fixed IP Address or have an IP Address dynamically assigned to it by the 11g Wireless Broadband router 's DHCP server.

6-2.1 Dynamic IP Addressing using DHCP Server.

4. From the “Apple” menu, select “Control Panel” and click on “TCP/IP”.
5. In the “TCP/IP (A New Name For Your Configuration)” window, select “Ethernet” in the “Connect via” location from the drop-down list.
6. In the “Setup” area:
 - Select “Using DHCP Server” in the “Configure” location from the drop-down list.
 - No other data needs to be entered.
 - Close the window.
7. Click “Save” from the file menu, then “Quit” TCP/IP.
8. Restart the computer.

6-2.2 Manual Configuration of Fixed IP Addresses

9. From the “Apple” menu, select “Control Panel” and click on “TCP/IP”.
10. In the “TCP/IP (A New Name For Your Configuration)” window,

select “**Ethernet**” in the “**Connect via**” location from the drop-down list.

11. In the “**Setup**” area:
 - Select “**Manually**” in the “**Configure**” location from the drop-down list.
 - In the “**IP Address**” location, enter the IP Address that you want to assign to the computer. (see the notes on Fixed IP Addresses 2-4 above).
 - Enter “**255.255.255.0**” in the “**Subnet Mask**” location.
 - Enter “**192.168.1.1**” (the 11g Wireless Broadband router’s default IP Address) in the “**Router Address**” location.
 - Enter the ISP’s IP Address in the “**Name Server**” location if your ISP has provided the information.
 - Close the window.
12. Click “**Save**” from the file menu then “**Quit**” TCP/IP.
13. Restart the computer.

6-3 11g Wireless Broadband router Configuration

To configure your 11g Wireless Broadband router , use your Web Browser and follow the instructions given in Chapter 3: Internet Access, section 3.3. To configure advanced settings, see Chapter 4: Advanced Applications.

6-4 Adding 11g Wireless Broadband router to Existing Network

If the 11g Wireless Broadband router is to be added to an existing Macintosh computer network, the computers will have to be configured to connect to the Internet via the 11g Wireless Broadband router .

1. From the “**Apple**” menu, select “**Control Panel**” and click on “**TCP/IP**”.
2. From the “**File**” menu, select “**Configurations**” and select your existing network configuration. Click “**Duplicate**”.
3. Rename your existing configuration. Click “**OK**”, and “**Make Active**”.
4. In the Setup area:
 - Select “**Manually**” in the “**Configure**” location from the drop-down list.
 - In the “**IP Address**” location, enter the IP Address that you want to assign to the computer. (see the note on fixed IP Addresses 2-4 above).

- Enter “**255.255.255.0**” in the “**Subnet Mask**” location.
 - Enter “**192.168.1.1**” (the 11g Wireless Broadband router’s default IP Address) in the “**Router Address**” location.
 - Enter the ISP’s IP Address in the “**Name Server**” location if your ISP has provided the information.
 - Close the window.
5. Click “**Confirm**”. TCP/IP is now configured for manual IP Addressing.
 6. Configure your 11g Wireless Broadband router (see Chapter).

Chapter 7: Trouble Shooting

This chapter provides solutions to problems you may encounter during installation and operation of your 11g Wireless Broadband router .

Hardware

Q: The Power LED is off.

Check that the power cable is properly connected to the 11g Wireless Broadband router , the power adapter and the socket.

Q: The LAN Link LED is off.

Check that the computer, hub or switch is properly connected to the 11g Wireless Broadband router .

Check that the computer's Ethernet card is properly installed.

Check that the 11g Wireless Broadband router and the computer are on the same network segment. If you are not sure, initiate the DHCP function (4-1) and set your computer to obtain an IP address automatically (3-3).

Check that the computer is using an IP address in the range of 192.168.1.2 ~ 192.168.1.254 and is therefore compatible with the 11g Wireless Broadband router 's default IP address of 192.168.1.1 (3-3). Check also the Subnet Mask is set to 255.255.255.0

Q: The DIAG LED stays lit.

The DIAG LED should light up when the device is first powered up to indicate it is checking for proper operation. After a few seconds, the LED should go off. If it stays lit, the device is experiencing a problem. Please contact your dealer.

Q: Why can't I configure the 11g Wireless Broadband router ?

First, check whether the 11g Wireless Broadband router is properly installed or not, including the LAN and WAN connections, and that all devices are switched on.

Next, check the IP configuration of your PC:

- ✓ For Windows 95/98 users: run winipcfg.exe or winipcfg from *Run* on the *Start* menu. If there are no IP addresses shown, click Release All and then click Renew All to get the IP addresses.
- ✓ For Windows NT 4.0 users: run ipconfig.exe or ipconfig from *Run* on the *Start* menu and follow the instruction as above.

Ensure that your PC and the 11g Wireless Broadband router are on the same network segment. If you are not sure, initiate the DHCP function and set your PC to obtain an IP address automatically.

Ensure that your PC is using an IP Address within the range 192.168.1.2 to 192.168.1.254 and thus compatible with the 11g Wireless Broadband router

default IP address of 192.168.1.1

Finally, use the Ping command in MS-DOS mode to verify the network connection:

Ping 127.0.0.1 to check the TCP/IP stack of your computer

Ping gateway IP (Default: 192.168.1.1) to check the internal link of network.

Note if you're not able to view the web configuration screen for the 11g Wireless Broadband router , make sure that you remove any proxy setting within your Internet browser, or remove the dial-up settings within your browser.

Q: What can I do if I have forgotten the password for the 11g Wireless Broadband router ?

You have to reset the Wireless Broadband router back to the factory default setting by pushing the Reset button for longer than 3 seconds. Refer to the user's manual to re-configure the settings.

Q: I cannot access my ISP's home page, why?

Some ISPs, such as @Home, require that their host name be specifically configured into your computer before you can surf their local web pages. If you are unable to access your ISP's home page, enter your ISP's Domain Name into the OnePage Setup (3-3) to enable all computers in your LAN access to it. If you only want to allow computers to access these home pages, open the TCP/IP Properties window (2-4) on these computers, click the "**DNS Configuration**" tab and enter your ISP's Domain Name in the "**Domain Name Search Suffix**" location.

Client Side (Computers)

Q: I can't browse in the Internet via the 11g Wireless Broadband router

A: Check the following:

- ✓ Check that the LAN Link/ACT LED on the front panel is lit to indicate proper connection between the computer and the 11g Wireless Broadband router .
- ✓ Check if both ends of the network cable are properly connected.
- ✓ Check that TCP/IP is installed on your computer (2-4).

For Windows 95/98, use a MS-Dos prompt to run "winipcfg" ("Ipconfig" for Windows NT). Check that the computer's IP Address is within the range of 192.168.1.2 ~ 192.168.1.254 and the Subnet Mask is 255.255.255.0. If you are using a fixed IP address, also check the Default Gateway IP Address and DNS address in "**More**".

- ✓ Check that the values as stated above are the same in Status Monitor (4-7).

Q: I get a time out error when I enter a URL or IP address.

A: Check whether other computers work. If they do, ensure the computer's IP settings are correct (IP Address, Subnet Mask, Gateway IP Address and DNS) (3-3). Then check whether the 11g Wireless Broadband router 's settings are correct (3-3).

Appendix A: Frequently Asked Questions

Q: What is the maximum number of IP Addresses the 11g Wireless Broadband router can support?

The 11g Wireless Broadband router can support up to 253 IP Addresses in the range of 192.168.1.2~192.168.1.254.

Q: Where should the 11g Wireless Broadband router be installed on the network?

In a typical environment, the 11g Wireless Broadband router should be installed between the ADSL/Cable modem and your LAN. Connect the 11g Wireless Broadband router to the Ethernet port of the ADSL/Cable modem, and connect your PCs to the RJ45 jack on the LAN side.

Q: Does the 11g Wireless Broadband router support IPX or AppleTalk?

No. The 11g Wireless Broadband router was designed to provide a multiple user LAN with shared Internet access and supports only the TCP/IP Protocol. If your Novell or Apple system is configured with TCP/IP, the 11g Wireless Broadband router can support them.

Q: Does the 11g Wireless Broadband router support 100Mb Ethernet?

Yes, the 11g Wireless Broadband router supports both 10Mb & 100Mb Ethernet on the LAN side.

Q: What is “NAT” and what is it used for?

The Network Address Translation (NAT) Protocol translates multiple IP Addresses on a private LAN into a single public IP Address that is accessible to the Internet. NAT not only provides the basis for multiple IP Address sharing but also adds to the LAN’s security since the multiple IP Addresses of LAN computers are never transmitted directly to the Internet.

Q: How can 11g Wireless Broadband router share single user account to multiple users?

11g Wireless Broadband router combines the following technologies to enable this function.

NAT (Network Address Translation): NAT is a technology which can create a private network domain behind a public IP. It is usually used as a firewall. It can also be used when there are not enough IP Address.

DHCP (Dynamic Host Configuration Protocol): DHCP is a protocol used to assign IP Address to internal computers automatically. It can save a lot of IP configuration. This protocol is supported by Windows 95/NT, Mac OS, and many other popular OS.

DNS (Domain name service): DNS is a protocol which translates a Domain Name to IP Addresses that Internet host can handle. Addressing systems using Domain name, like www.yahoo.com, is easier to use than an IP address, such as 204.71.177.70.

Q: What operating systems does 11g Wireless Broadband router series support?

11g Wireless Broadband router uses standard TCP/IP protocol, it can be operated as long as you have the TCP/IP protocol installed in your operating system (For example: Windows 9x, Windows NT, Windows 2000, etc.)

Q: Can I use multiple E-mail accounts if I use 11g Wireless Broadband router ?

Yes, you can. Some people think having one Internet account mean that they can only have one E-mail account. However, E-mail is set by mailbox accounts and is different to the account you use to connect to your ISP. If you want more E-mail accounts, you should contact your ISP or you can browse the Internet to apply for a free E-mail account.

Q: Can Internet users access LAN computers?

11g Wireless Broadband router uses NAT to route all in/out packets. All external users can only see the IP of the 11g Wireless Broadband router but cannot access LAN computers. The LAN computers are well protected with the 11g Wireless Broadband router's natural firewall.

Q: When should I use DMZ host?

Enable DMZ host when you want to have unrestricted communication between your PC and the Internet, for example, playing Internet games (i.e. Ages of Empire) or having multimedia conferences (i.e. NetMeeting).

Q: Does the 11g Wireless Broadband router support PPTP of VPN packets pass through?

Yes. 11g Wireless Broadband router supports single session PPTP pass through.

Q: Does the 11g Wireless Broadband router series support IPsec?

Yes. 11g Wireless Broadband router supports single session IPsec pass through.

Appendix B: Technical Specifications

Standards Compliance

IEEE 802.3 10BASE-T

IEEE 802.3u 100BASE-TX

IEEE 802.11g Wireless

Interface

One 10/100Mbps Ethernet RJ45 port on WAN

Four 10/100Mbps auto-sensing Ethernet RJ-45 ports and one uplink port on LAN

Wireless access point

Management

Web-based UI Management

LED Display

Power

DIAG

Enable/Activity for Wireless interface

Link/Activity for both WAN and LAN port(s)

Environment

Operation Temperature: 0 ~ 40 degrees C (32 ~ 104 degrees F)

Storage Temperature: -20 ~ 60 degrees C (-4 ~ 140 degrees F)

Humidity: Operating 10 ~ 85% non-condensing

Storage 5% ~ 90% non-condensing

Dimension

122 (L) x 175 (W) x 31 (H) mm

Power

External, DC 12V, 1A

Mounting

Desktop / Wall-mounting

Appendix C: Glossary

10Base-T / 100Base-T

The adaptation of the Ethernet standard for Local Area Networks (LANs). 10Base-T uses a twisted pair cable with maximum lengths of 100 meters and transmits data at 10Mbps maximum. 100Base-T is similar, but uses two different twisted pair configurations and transmits at 100Mbps maximum.

Ad-hoc Network

Also known as the peer-to-peer network, an ad-hoc network allows all PCs participating in a wireless network and being within range, to communicate with each other. User's in the same ad-hoc network can share files, printers, and other network resources.

Adapter

A device that makes the connection to a network segment, such as Ethernet and modem cards and adapters.

ADSL

Asymmetric Digital Subscriber Line (ADSL), as it's name indicates, is an asymmetrical data transmission technology with higher traffic rate downstream and lower traffic rate upstream. ADSL technology satisfies the bandwidth requirements of applications which demand "asymmetric" traffic, such as web surfing, file downloads and telecommuting.

Bandwidth

The amount of data that can be transmitted in a fixed amount of time.

Browser

A software application used to locate and display Web pages. Examples include Netscape Navigator and Microsoft Internet Explorer.

BSS

BSS is the acronym of Basic Service Set that consists of a wireless access point and a group of wireless client PCs.

Communication Protocols

Communication between devices requires they agree on the format in which the data is to be transmitted, sent and received. The communication protocols are a set of rules that define the data format.

Cookie

A Cookie is a piece of data stored on your PC that a web server can retrieve later to identify your machine. It is normally a text with ID number, but can include other information.

DHCP

DHCP, short for Dynamic Host Configuration Protocol, is a protocol for assigning dynamic IP Addresses to devices on a network. Dynamic Addressing means that a device can have a different IP Address each time it connects to the network.

Domain Name

A name that identifies one or more IP Addresses. For example, the domain name microsoft.com

represents about a dozen IP Addresses. Domain names are used in URLs to identify particular Web pages. For example, in the URL <http://www.pcwebopedia.com/index.html>, the domain name is pcwebopedia.com.

DoS

DoS is the abbreviation for Denial of Service. This occurs when a computer or network is overwhelmed to the point that it can no longer function normally. For example, a hacker may use fake IP addresses to accumulate numerous connections to flood the server he wants to attack.

DDNS

DDNS is an acronym for Dynamic Domain Name Service. It helps map the domain name of a host which has a dynamic public IP address to the IP address that is allocated each time the ISP assigns a new IP address.

DNS

Short for Domain Name Server, DNS translates domain names into IP Addresses and help us recognize and remember domain names as they are alphabetic in form. The Internet actually runs on numbered IP Addresses. DNS servers translate domain names into their respective IP Addresses.

DSSS

Also known as Direct Sequence Spread Spectrum, it is a radio transmission method that continuously changes frequencies.

Ethernet

One of the most common Local Area Network (LAN) protocols. Ethernet uses a bus topology which supports a data transfer rate of 10 Mbps.

ESS

ESS is an acronym for Extend Service Set that consists of several BSS's.

Firewall

A security system used to enforce an access control policy between an organization's networks and the Internet.

IEEE

Short for Institute of Electrical and Electronics Engineers, an organization best known for developing standards for the computer and electronics industry.

Internet

A global network connecting millions of computers for the exchange of data, news and opinions.

Intranet

A network based on the TCP/IP Protocol (an internet) belonging to an organization, and accessible only by that organization's members, employees, or others with authorization.

Infrastructure Network

Unlike “Ad-hoc” network, where users on a wireless LAN send data to each other directly, users’ on an “Infrastructure” network send data to the other point through a dedicated access point. Additionally, the access point enables users on a wireless LAN to access an existing wired network to take advantage of sharing the wired networks resources, such as files, printers, and Internet access.

IP Address

An identifier for a computer or device on a TCP/IP network. Networks using the TCP/IP

Protocol route messages based on the IP Address of the destination. The format of an IP address is a 32-bit numeric address written as four numbers separated by periods. Each number can be from zero to 255.

IPSec

Internet Protocol Security is a security standard for network transmission. It provides authentication and packet encryption over the Internet.

ISP

Short for Internet Service Provider, a company that provides access to the Internet, usually for a monthly fee. The ISP provides a software package, username, password and access phone number allowing users to log on to the Internet, browse the World Wide Web and send and receive e-mail.

Local Area Network (LAN)

A computer network that spans a relatively small area. Most LANs are confined to a single building or group of buildings. However, one LAN can be connected to other LANs over any distance via telephone lines and radio waves. A system of LANs connected in this way is called a wide area network (WAN)

MAC Address

Short for Media Access Control Address and is a hardware address that uniquely identifies each node of a network.

NAT

Short for Network Address Translation, a routing protocol that allows global IP Addresses to be translated into multiple private IP Addresses for use on internal LAN networks. The explosion in the use of the Internet has created a critical problem for the Internet Assigned Numbers Authority (IANA) which is in charge of assigning IP Addresses to Internet users, ISPs etc.. NAT is a technology that has been introduced to help maximize the utilization of assigned IAN and global IP Addresses.

Network Protocol

Network protocols encapsulate and forward data packets from one interface to another.

PAP/CHAP ISP

Short for Password Authentication Protocol and Challenge Handshake Authentication Protocol. Most ISPs use either one for user identification. If your ISP doesn't support these two protocols, contact your ISP for an authentication script.

PPP

Short for Point-to-Point Protocol, a communications protocol for transmitting information over standard telephone lines between devices from different manufacturers.

PPPoE

Short for PPP over Ethernet, relying on two widely accepted standards, Ethernet and the Point-to-Point Protocol. It's a communications protocol for transmitting information between devices from different manufacturers over an Ethernet.

PPTP

Short for Point to Point Tunneling Protocol, PPTP encapsulates the packet for transmission over the Internet. It is similar to creating a private "tunnel" over a large public network and has almost equal security to a private network without actually leasing a private line.

Protocol

An agreed format for transmitting, sending and receiving data between two devices.

Roaming

The ability for a wireless device moving from one access point's range to another without losing the connection.

Router

An Internet device that routes requests for information to other routers until the information's location is found and the data can be transmitted back to the origin of the request.

SPI

SPI is an acronym for Stateful Packet Inspection. The SPI engine examines not just the headers of the packet, but also the packet contents, it can then determine more about the packet than just its source and destination information. Moreover, stateful inspection firewalls also close off ports until a connection to the specific port is requested.

TCP/IP

Short for Transmission Control Protocol and Internet Protocol, the suite of communications protocols that enable hosts on the Internet to connect and exchange streams of data.

VPN

VPN is an acronym for Virtual Private Network. Via access control and encryption, VPN brings the same security to data transmission through the Internet as if it being transmitted through a private network. It not only takes advantage of economies of scale but also ensures high level security while the packet is sent over the large public network.

Wide Area Network (WAN)

A system of LANs being connected by telephone lines and radio waves. Although some WANs may be privately owned, they are usually considered a means of public access.

WEP

An acronym for **Wired Equivalent Privacy**. It is an encryption mechanism used to protect your wireless data communications. WEP uses a combination of 64-bit/128-bit keys to encrypt data that is transmitted between all points in a wireless network to insure data security. It is described in the IEEE 802.11 standard.