


Connect Box



Installation, Tips & Tricks

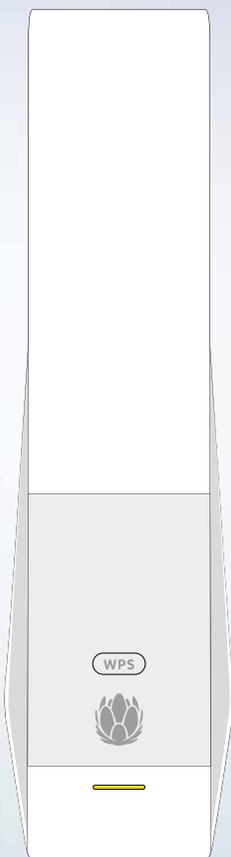

upc.ch/support
0800 66 88 66



upc

Table of Contents

1 Overview	6
Contact Information	6
Standard Features	6
Connect Box LAN Choices	7
Wireless LAN	7
Wired Ethernet LAN	9
Front Panel	10
Rear Panel	11
MAC Label	12
2 Getting Started	13
Inside the Box	13
Before You Begin	13
System Requirements	14
Connecting the Connect Box	14
Setting up Internet Access	15
Configuring TCP/IP in Windows XP	16
Verifying the IP Address for Windows XP	16
Configuring TCP/IP in Windows 7	17
Verifying the IP Address for Windows 7	17
Configuring TCP/IP in windows 8	17
Verifying the IP Address for Windows 8	18
Renewing the IP Address for Windows XP, Windows 7 & Windows 8	18
Setting Up a WLAN	19

3 Start	20
Starting the Connect Box	20
Multiple Language Support	20
Log in	21
Change password	21
Wi-Fi Configuration	23
4 Home	24
Quick Set up Wizards	24
Connect Box Status Overview	25
5 Connected Devices	26
6 Modem Mode	26
7 Advanced Settings	27
Wireless	27
Wireless Signal	28
Security	29
Wireless MAC Filtering	30
Guest Network	32
WPS	33
Security	34
Firewall	34
MAC Filtering	35
IP and Port Filtering	36
Port Forwarding	40
Port Triggering	41
DMZ	43
DHCP	43

UPNP	45
Tools	45
Status	46
Downstream	46
Upstream	47
Configuration	48
Network Log	49
Ping	50
Traceroute	51
MTU Size	52
8 Admin	53
Change password	53
Reload and Reboot	54
Remote Access	56
Info	56
9 Troubleshooting	57
Solutions	57

1 Overview

The Connect Box is the worldwide most compact EuroDOCSIS 3.0 Voice Gateway which provides the ideal all-in-one wired and wireless solution, designed for your home, home office, or small business/enterprise. It can be used in households with one or more computers capable of wireless connectivity for remote access to the wireless gateway.

This user guide provides product overview and setup information for the Connect Box. It also provides instructions for installing the wireless gateway and configuring the Wireless LAN, Ethernet, Router, DHCP, and Security settings.

Contact Information

- For any questions or assistance with the Connect Box, contact your Internet Service provider.
- For information on customer service, technical support, or warranty claims; see the Connect Box Software License, Warranty, Safety, and Regulatory Information card provided with the Connect Box.

Standard Features

The Connect Box combines high-speed Internet access, networking, and computer security for a home or small-office LAN. It offers the following features:

- Combination of five separate products in one compact unit – an EURO DOCSIS® 3.0 cable modem, IEEE 802.11a/b/g/n/ac wireless access point, Ethernet 10/100/1000 Base T connections, VoIP Internet telephone connections, and firewall.
- An integrated high-speed cable modem for continuous broadband access to the Internet and other online services with much faster data transfer than traditional dial-up or ISDN modems.
- Advanced firewall for enhanced network security from undesired attacks over the Internet. It supports stateful-inspection, intrusion detection, DMZ, denial-of-service attack prevention, and Network Address Translation (NAT).
- One broadband connection for up to 253 computers to surf the web; all computers on the LAN communicate as if they were connected to the same physical network.
- Four 10/100/1000 Base-T Ethernet uplink ports supporting half- or full-duplex connections with auto-MDIX capability.
- An IEEE 802.11a/b/g/n/ac wireless access point to enable users to remain connected while moving around the home or small office or to connect desktop computers without installing network wiring. Depending on distance, wireless connection speeds can vary.

- Connect Box wireless function supports Wi-Fi 2.4G/5G dual-band mode.
- A secure Wireless Fidelity (Wi-Fi) broadband connection for Wi-Fi enabled devices on your network, such as your mobile, laptops, tablet, printers, PDAs, and desktops.
- Routing for a wireless LAN (WLAN) or a wired Ethernet LAN; you can connect more than four computers using hubs and/or switches
- A built-in DHCP server to easily configure a combined wired and/or wireless Class C private LAN.
- Virtual private network (VPN) pass-through operation supporting IPSec, PPTP, or L2TP to securely connect remote computers over the Internet.
- Connect Box Configuration Manager (CMGR) which provides a graphical user interface (GUI) for easy configuration of necessary wireless, Ethernet, router, DHCP, and security settings.

Connect Box LAN Choices

You can connect up to 253 client computers to the Connect Box using one or any combination of the following network connections:

- Wi-Fi wireless LAN (WLAN)
- Ethernet local area network (LAN)

Wireless LAN

Wireless communication occurs over radio waves rather than a wire. Like a cordless telephone, a WLAN uses radio signals instead of wires to exchange data. A wireless network eliminates the need for expensive and intrusive wiring to connect computers throughout the home or office. Mobile users can remain connected to the network even when carrying their laptop to different locations in the home or office.

Each computer or other device on a WLAN must be Wi-Fi enabled with either a built-in or external wireless adapter.

Laptops – Use a built-in wireless notebook adapter, a wireless PCMCIA slot adapter, or a wireless USB adapter.

Desktops – Use a wireless PCI adapter, wireless USB adapter, or compatible product in the PCI slot or USB port, respectively.



Sample Wireless Network Connections (Connect Box model shown)

Your maximum wireless operation distance depends on the type of materials through which the signal must pass and the location of your Connect Box and clients (stations). Wireless performance cannot be guaranteed for all supported distances in all environments.

Note: To get better wireless coverage, please put your Connect Box wireless gateway vertically.

Wired Ethernet LAN

You can easily connect any PC with an Ethernet cable to the Connect Box Ethernet port. Because the Connect Box Ethernet port supports auto-MDIX, you can use a straight-through or cross-over cable to connect a hub, switch, or computer. Use category 5, or better, cabling for all Ethernet connections.



Sample Ethernet to Computer Connection (Connect Box model shown)


A wired Ethernet LAN with more than four computers requires one or more hubs, switches, or routers. You can:

- Connect a hub or switch to any Ethernet port on the Connect Box.
- Use Ethernet hubs, switches, or routers to connect up to any combination of 253 computers and wireless clients to the Connect Box.

More detailed information on Ethernet cabling is beyond the scope of this document.

Front Panel

The Connect Box front panel contains indicator lights and the Wi-Fi / WPS button which is used to configure Wi-Fi Protected Security (WPS) on compatible clients connected to the Connect Box network.

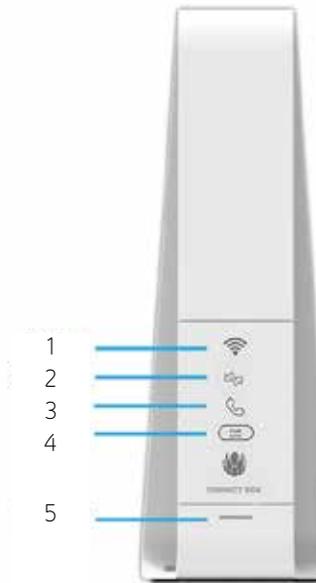


The Connect Box front panel LED indicators provide the following status information for power, communications, and errors:

S.no	LED	Status	On
1	WI-FI	Red: Wireless function is fail.	Green: Wireless interface is active now.
2	Internet	Blinking Green :Scanning for Internet connection, transmitting or receiving data over the Internet	Green: Connected to Internet
3	TEL	LED does not blink	Green: Telephone is connected and activated; on-hook

S.no	LED	Status	On
4	WPS	WPS Button	Push this button to connect with other WPS enabled devices.
5	Power	Blinking White: Booting up Device	Solid White: Device is ready

Rear Panel

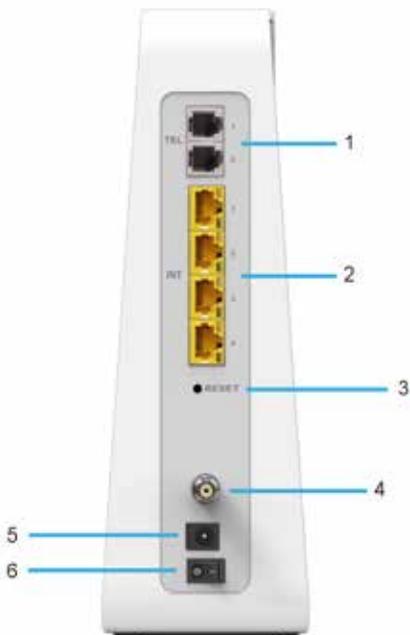

The Connect Box (shown above) rear panel contains the following cabling port and connectors:

S.no	Item	Description
1	TEL	Use this port to connect telephone for VOIP function.
2	Ethernet LAN port	Use these ports to connect local computers.
3	RESET	Press and hold the RESET button for five seconds or longer to restore Connect Box to factory default settings. After factory default settings are restored, the gateway will restart and may take 5 to 30 minutes to find and lock on the appropriate communication channels.
4	COAX	Connect your coaxial cable line to this port.
5	POWER	Connect the supplied power adapter to this port.
6	POWER SWITCH	Power on/off button.

MAC Label

The Connect Box Media Access Control (MAC) label is located on the bottom of the Connect Box. The label contains the MAC address which is a unique, 48-bit value that identifies each Ethernet network device.



Note: Label may differ according to local settings or requirements.

2 Getting Started

Inside the Box

Before you install the Connect Box, verify that the following items are included in the box with the Connect Box.

Item	Description
Power Adapter 	Connect the Connect Box to an AC electrical outlet
Ethernet Cable 	Connect the Connect Box to an Ethernet port
Wi-Fi Card 	Provides default SSID and password and QR code for Wi-Fi access
Connect Box Install Sheet 	Provides basic information for setting up the Connect Box

Before You Begin

Take the following precautions before installing the Connect Box:

- Postpone installation until there is no risk of thunderstorm or lightning activity in the area.
- To avoid potential shock, always unplug the power cord from the wall outlet or other power source before disconnecting it from the Connect Box rear panel.
- To prevent overheating the Connect Box, do not block the ventilation holes on the sides of the unit. Do not open the unit. Refer all service to your Internet Service provider.

Check that you have the required cables, adapters, and adapter software. Verify that the proper drivers are installed for the Ethernet adapter on each networked computer. For information on WLAN setup, see *Setting Up Your Wireless LAN*.

System Requirements

Your computer must meet the following minimum requirements:

- Computer with Pentium® class or better processor
- Windows XP, Windows 7, Windows 8, Macintosh, or UNIX operating system with available operating system CD-ROM
- Any web browser, such as Microsoft Internet Explorer, Netscape Navigator®, or Mozilla® Firefox®

Connecting the Connect Box

Before starting, be sure the computer is turned on and the Connect Box power cord is unplugged.

1. Connect one end of the coaxial cable to the cable outlet or splitter.
2. Connect the other end of the coaxial cable to the Cable connector on the Connect Box. Hand-tighten the connectors to avoid damaging them.
3. Plug the power cord into the Power port on the Connect Box.
4. Plug the other end of the power cord into an electrical wall outlet. This automatically powers on the gateway. You do not need to unplug the gateway when it is not in use. The first time you plug in the Connect Box, allow it 5 to 30 minutes to find and lock on the appropriate communications channels.
5. Plug the other end of the telephone cord of a single or two-line telephone into the TEL 1/2 port on the rear of the Connect Box.
6. Plug the telephone cord of a single or two-line telephone into the telephone.
7. Connect the Ethernet cable to the Ethernet port on the computer, and connect the other end of the Ethernet cable to the Ethernet port on the gateway.



8. Check that the LEDs on the front panel cycle through the following sequence:

Connect Box LED Activity during Startup

LED	Description
Online	Flashes during Connect Box registration and configuration. Changes to solid green when the Connect Box is registered successfully and ready for Internet access

Setting up Internet Access

After installing the Connect Box, check that you can connect to the Internet. You can retrieve an IP address for your computer's network interface using one of the following options:

- Retrieve the statically defined IP address and DNS address
- Automatically retrieve the IP address using the Network DHCP server

The Connect Box provides a DHCP server on its LAN. It is recommended that you configure your LAN to obtain the IPs for the LAN and DNS server automatically.

Make sure all computers on your LAN are configured for TCP/IP. After configuring TCP/IP on your computer, you should verify the IP address.

Note: For UNIX or Linux systems follow the instructions in the applicable user documentation.

Configuring TCP/IP in Windows XP

1. Open the Control Panel.
2. Double-click Network Connections to list the Dial-up and LAN or High-Speed Internet connections.
3. Right-click the network connection for your network interface.
4. Select Properties from the drop-down menu to display the Local Area Connection Properties window. Be sure Internet Protocol (TCP/IP) is checked.
5. Select Internet Protocol (TCP/IP) and click Properties to display the Internet Protocol (TCP/IP) Properties window.
6. Select Obtain an IP address automatically and Obtain DNS server address automatically.
7. Click OK to save the TCP/IP settings and exit the TCP/IP Properties window.
8. Close the Local Area Connection Properties window and then exit the Control Panel.
9. When you complete the TCP/IP configuration, continue with Verifying the IP Address in Windows XP

Verifying the IP Address for Windows XP

1. On the Windows taskbar, click Start.
2. Select Run to open the Run window.
3. Type cmd and click OK.
4. Type ipconfig and press Enter to display your IP configuration.

Configuring TCP/IP in Windows 7

1. Open the Control Panel.
2. Click Network and Internet to display the Network and Internet window.
3. Click Network and Sharing Center to display the Network and Sharing Center window.
4. Click change adapter settings
5. Right-click the network connection for the network interface you want to change.
6. Click Properties to display the Local Area Connection Properties window
7. Select Internet Protocol Version 4(TCP/IPv4), double click it or click Properties
8. Select Obtain an IP address automatically and Obtain DNS server address automatically.
9. Click OK to save the TCP/IP settings and close the Internet Protocol Version 4 (TCP/IPv4) Properties window.
10. Click OK to close the Local Area Connection Properties window.
11. Close the remaining windows and exit the Control Panel.
12. When you complete the TCP/IP configuration, continue with Verifying the IP Address in Windows 7

Verifying the IP Address for Windows 7

1. On the Windows taskbar, click Start.
2. Click All Programs.
3. Click Accessories.
4. Click Run to open the Run window.
5. Type cmd and click OK to open a command prompt window.
6. Type ipconfig and press Enter to display the IP Configuration.

Configuring TCP/IP in windows 8

1. Press Windows key on the keyboard to go into Desktop mode.
2. Move the mouse's cursor to the lower right corner of the screen. A right panel will now appear. Click the settings icon. The settings pane will now appear.
3. On the settings pane, click the Control panel link.
4. Open The Control Panel.
5. Click Network and internet to display the Network and Internet window.
6. Click Network and sharing center to display the Network and Sharing Centre window.
7. Click change adapter settings.

8. Right click the network connection for the network interface you want to change
9. Click properties to display the Local Area Connection properties window.
10. Select Internet protocol version 4 (TCP/IPv4),double click it or click properties.
11. Select obtain IP address automatically and obtain DNS server address automatically.
12. Click ok to save the TCP/IP settings and close the internet protocol version 4
13. (TCP/IP) settings and close the internet protocol version 4 (TCP/IPV4 properties window.
14. Click ok to close the Local Area Connection properties window.
15. Close the remaining windows and exit the control panel.
16. When you complete the TCP/IP configuration, continue with verifying the IP address in windows 8.

Verifying the IP Address in Windows 8

1. Press the Windows key on your keyboard and then enter command prompt" to display the Command Prompt shortcut. A search box on right side of the screen will appear.
2. Click Command Prompt
3. In the Command Prompt, Type ipconfig and press Enter to display the IP configuration

Renewing the IP Address for Windows XP, Windows 7 & Windows 8

1. Open a command prompt window.
2. From the Windows taskbar, click Start.
3. Select Run to open the Run window.
4. Type cmd and click OK to open a command prompt window.
5. Type ipconfig /renew and press Enter. A valid IP address should appear Indicating that Internet access is available.
6. Type exit and press Enter to close the command prompt window.
7. If, after performing this procedure, your computer still cannot access the Internet, call your service provider.

Setting Up a WLAN


Do the following to set up a Wi-Fi network using the WPS button on the Connect Box:

1. Power on the Connect Box.
2. Power on the WPS-enabled devices you want to have access to the network, such as a PC, router, or telephone.
3. The Wi-Fi network will automatically detect the WPS devices.
4. Press WPS button on the Connect Box.
5. If applicable, press WPS button on the other WPS devices.

3 Start

Starting the Connect Box


1. On a computer on the LAN, open a web browser.
2. In the Address or Location field, type 192.168.0.1 and press ENTER to display the Login window
3. You can see the below welcome page

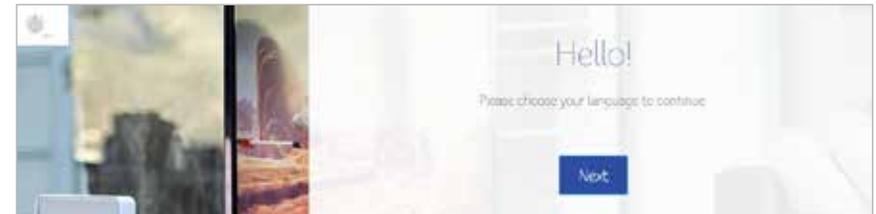

Click Next to continue


Multiple Language Support

Choose your Language Preference, all the text will switch to the selected language immediately. Default Language is English.

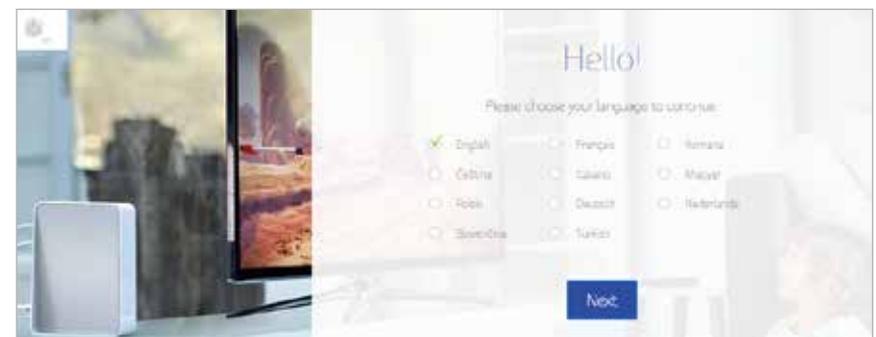


Log in

In order to login Connect Box WI-FI Modem router, type the password which is located in the product label on the bottom of the WI-FI modem router.

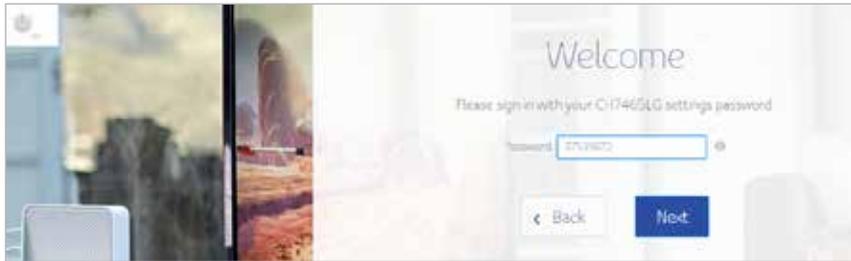


Change password

To change your default password, click change. Enter your new password & a valid email address that is used to recover your password. If you don't want to change the default password click skip.

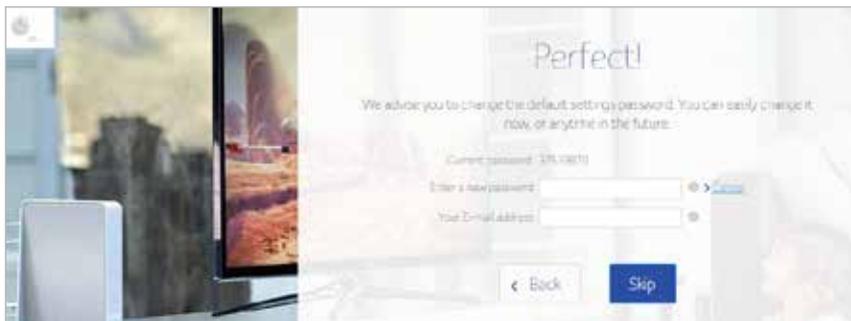

To prevent unauthorized configuration, change the default password immediately when you first configure the Connect Box Wireless Cable Modem Gateway.

The following screens will appear after the above process.

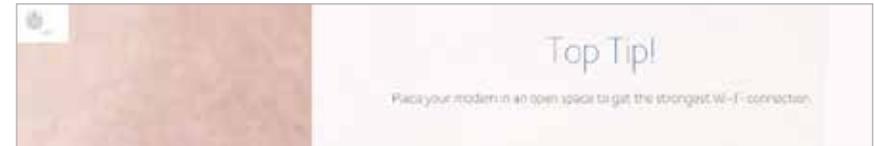

Press continue

Wi-Fi Configuration

Click change button to change your Wi-Fi Network name and Wi-Fi password, if you don't want to change click Next.




After the above process you can see the below screen, to manage your settings click go to home page or click exit.



For normal operation, you do not need to change most default settings.

4 Home

Connect Box Home Page displays Quick Set-Up wizards and the Connect Box Status Overview.

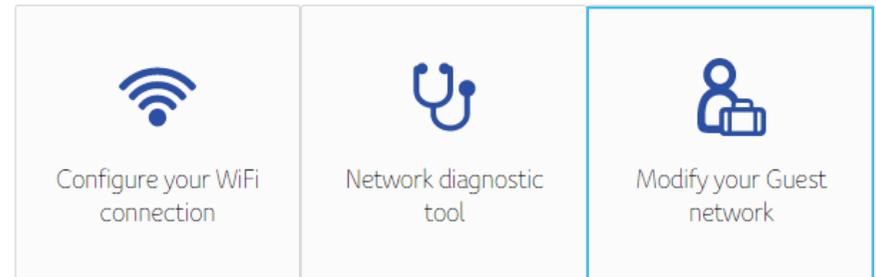

Quick Set up Wizards

Configure Your Wi-Fi Connection – Click this to view or change the wireless settings for your Wi-Fi modem router.



Network Diagnostic Tool – Click this to check the Broadband Service, Telephone Service, Ethernet Connection Service and WI-FI Connections status.




Guest Network - Click this to configure Wireless Network for Guests. Set up a guest network to allow visitors to use your Wi-Fi modem router's Internet connection.



Connect Box Status Overview

This section displays the Wireless, Internet and Telephony Status and also provides information about the Wireless and Ethernet connected devices to the Connect Box Wi-Fi modem router.

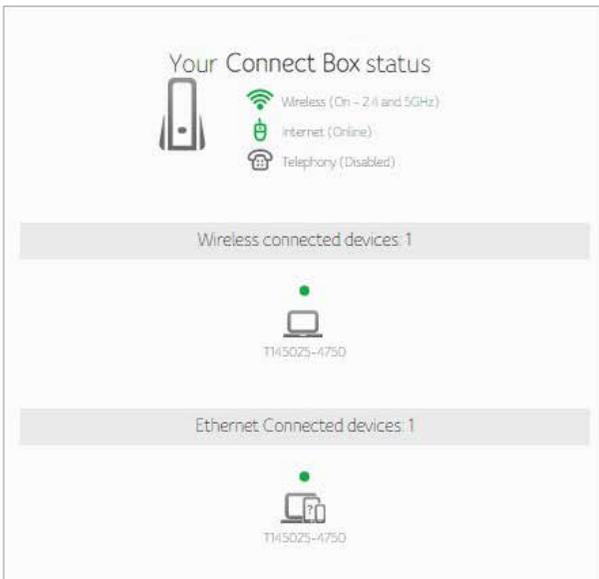

5 Connected Devices

This section displays the information of the devices which is connected to Connect Box Wi-Fi modem router.


Connected devices

All devices connected to you CH7465LG are listed below. Refresh

Device name	MAC address	IP address	Speed (Mbps)	Connected to
T145025-4750	20:AA:0A:03:27:85	192.168.0.10/24	1000	Ethernet 3
T145025-4750	10:06:26:27:4F:72	192.168.0.10/24	11	Wi-Fi 2/4G (WPA2/TKIP)

6 Modem Mode


This section allows you to choose Modem Mode. Click Enable Modem Mode and apply changes.

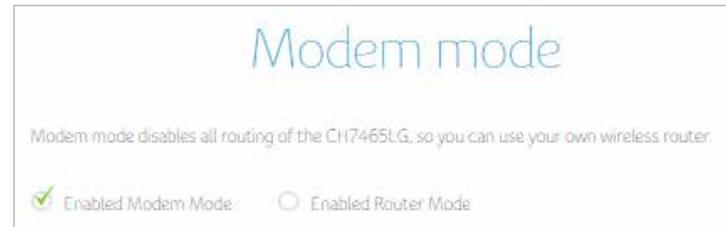

Note: To log in Web UI input default Modem Mode IP address 192.168.100.1.

7 Advanced Settings

ADVANCED SETTINGS screen help to configure Wireless setting, Security Setting, DHCP setting, UPnP and Tools.

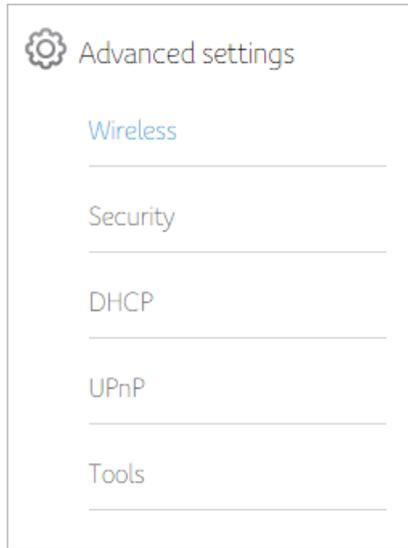


Wireless

The Connect Box Wireless screen allows you to configure your wireless LAN (WLAN). Click wireless submenu option to view or change the configuration information for that option.



Wireless Signal

Connect Box is a dual band product and all the basic settings of 2.4GHz and 5GHz can be changed in this screen. You can configure basic features of your Wi-Fi wireless network, including enable or disable the wireless interface, to choose wireless mode, to set the channel to manual or auto and to select channel width.

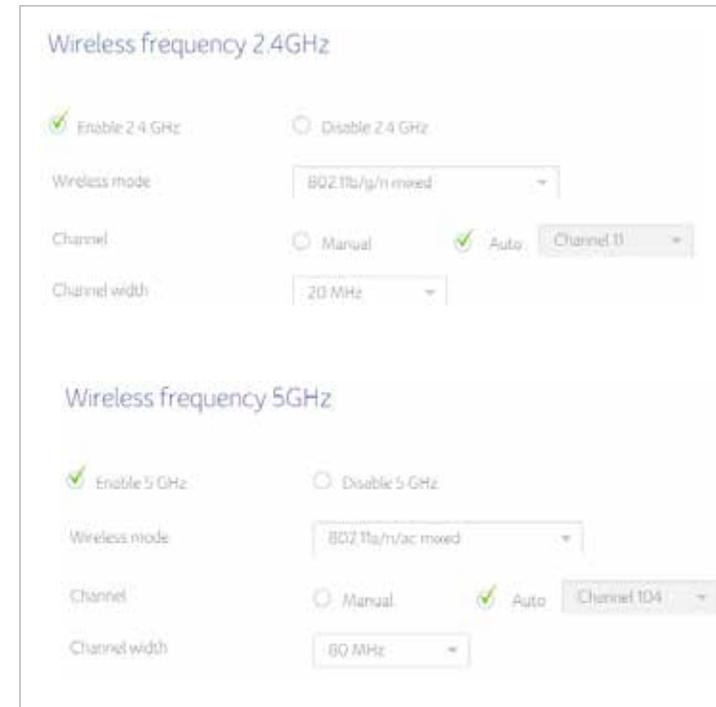

Security

To prevent unauthorized data transmitted over the wireless LAN, you must enable wireless security. You can manually configure the wireless settings and security for your gateway from the Wireless Settings security screen.

Select the type of security that you want to use.

- Select Disabled to use no security. Anyone in the coverage area can enter your network.
- Select WPA2-PSK to use the Wi-Fi Protected Access (Personal) security protocol.
- Select WPA-PSK/WPA2-PSK mixed mode which can provide broader support for all wireless clients.

The screenshot shows two sections for wireless security settings. The top section is for 2.4 GHz and the bottom for 5 GHz. Both sections have identical fields: WiFi Network Name (SSID) set to 'LPC52ADEFE', WiFi Network Name (SSID) broadcast set to 'Yes', Security set to 'WPA-PSK/WPA2-PSK', and WiFi password (security key) set to 'z7whxEbv8hpm'. A strength indicator bar below the password shows 'Strong'.

Wireless MAC Filtering

The wireless MAC filter is a layer of security that allows only specific MAC addresses to connect to your router via Wi-Fi. This section allows you to specify a list of MAC addresses that are authorized. When a device tries to connect to your Wi-Fi network, if its MAC address does not match one on the authorized list, it will not be able to establish a connection. Alternatively, you can ban a certain list of MAC addresses and every other MAC address that is not on the list will be able to connect.

When you enable MAC address filtering on the Connect Box, you can set up a list of MAC addresses, and then specify whether you want to:

- Disabled - The default setting is MAC Filtering disabled
- Allow the devices on the list to access the network (in which case no other devices can access the network)
- Deny the devices on the list access to the Connect Box and the network (in which case all other devices can access the network)

The screenshot shows the 'Wireless MAC filtering' settings. It includes a descriptive text: 'This section allows configuration of MAC address filters in order to block or only allow internet traffic to specific devices on your Wi-Fi network.' Below this, there are three radio button options: 'Disabled' (which is selected), 'Allow', and 'Deny'.

Displays the device which is attached through Wi-Fi

The screenshot shows a table titled 'Attached devices' with a 'Refresh' button. The table has three columns: Device name, MAC address, and Connected to. One device is listed with a status icon.

	Device name	MAC address	Connected to
🔍	194025-4750	ED06EE2261F3	Wi-Fi 2.4G LPC52ADEFE

Click Add device to add a device manually

Add device

Device name:

MAC address: : : : : :

Wireless radio: 2.4GHz 5GHz Both 2.4GHz and 5GHz

Displays the Wireless Filtered Device details

Wireless filter list

Device name	MAC address	Wireless radio	Delete
HelloWorld	5c:35:3b:da:3b:84	2.4 GHz	<input type="checkbox"/>

Guest Network

The Guest network is a feature of the Connect Box Wi-Fi Gateway that creates a separate network for guests. This secured network provides Internet access to wireless devices for your guests. The Guest network SSID is the same as the 2.4 GHz Wireless Network Name (SSID) however, followed by a Guest suffix. It is a totally different network with a different password from the network which means devices connected to the guest network will not be able to share files and printers connected to the main network.

Enable guest network Disable guest network

WiFi Network Name (SSID): ⓘ

WiFi Network Name (SSID) broadcast: Yes No

Security: ⓘ


WiFi password (security key): ⓘ

Strong

WPS

Connect Box provide WPS (Wi-Fi Protected Setup) function, with it enable will support WPS clients to join the network very easily. It is a standard for easy and secure establishment of a wireless network. With WPS you can setup and protect your wireless network in just a few easy steps.

We suggest users to press Add Client button to start WPS directly. By default, that will be PBC (Push Button Configuration) and easy for users.

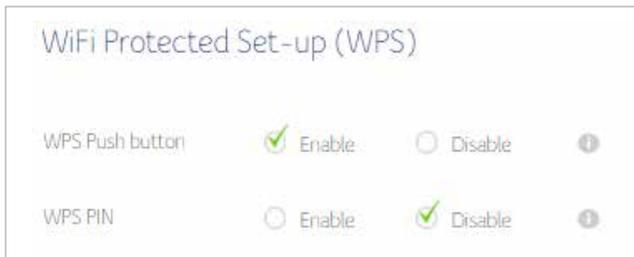


WiFi Protected Set-up (WPS)

WPS Push button Enable Disable ⓘ

WPS PIN Enable Disable ⓘ

To generate WPS Pin number press Generate new AP WPS PIN

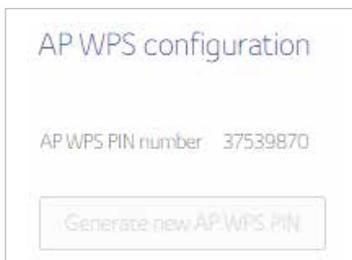


AP WPS configuration

AP WPS PIN number 37539870

Generate new AP WPS PIN

Choose the method to add WPS client




Add WPS client

Push Button PIN

Add client

Security

The Connect Box security section allows you to view and configure Firewall, MAC Filtering, IP and Port Filtering, Port Forwarding, Port Triggering and DMZ. You can click any security submenu option to view or change the configuration information for that option.




Security

- > Firewall
- > MAC filtering
- > IP and Port filtering
- > Port forwarding
- > Port triggering
- > DMZ

Firewall

This page is used to configure Firewall Protection level and display all allowed services.



IPv4 firewall

Firewall protection Enabled

Block fragmented IP packets Enabled

Port scan detection Enabled

IP flood detection Enabled

ICMP flood detection Enabled

ICMP flood detect rate



IPv6 firewall

Firewall protection Enabled

Block fragmented IP packets Enabled

Port scan detection Enabled

IP flood detection Enabled

ICMP flood detection Enabled

ICMP flood detect rate

MAC Filtering

This page allows configuration of MAC address filters in order to block Internet traffic to specific network devices on your local network.

MAC filtering

This page allows configuration of MAC address filters in order to block internet traffic to specific devices in your home network.

Attached devices Refresh

	Device name	MAC address	Connected to
<input checked="" type="checkbox"/>	T145025-4750	20:6A:BA:83:27:85	Ethernet 3

Select Device name to add filter rule

Add filter rule

Device name:

MAC address: (example: 01:23:45:67:89:AB)

Enable or delete from the MAC filter list

MAC filter list

Device name	MAC address	Enabled	Delete
T145025-4750	20:6A:BA:83:27:85	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Choose the time period to activate the MAC filtered device

When would you like your MAC filtering to be active?

Always on
 I only want to restrict internet access at:
 The same time every day
 Different times on different days of the week

Hours: 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23

Monday
Tuesday
Wednesday
Thursday
Friday
Saturday
Sunday

Blocked day and time [Clear All](#) [Inverse](#)

tip Click on the tiles to block

IP and Port Filtering

This page allows you to specify the IP packet filtering rules to prevent the service accessed from the Internet hosts or limit the Internet access for local hosts. This page allows configuration of port filters in order to block specific Internet services to all devices on your local network.

1. Press Create a new rule button to add IPv4 Rule.

IPv4 port filtering

This section allows you to specify packet filtering rules to limit the internet access for local hosts.

Source address	Destination address	Protocol	Source port	Destination port	Enabled	Delete
No filtering rule!						

2. Fill in needed information, and then press Apply button.

New IPv4 filtering rule

This section allows you to specify packet filtering rules to limit the internet access for local hosts.
The rule is created with the function specified below.

Enabled Disabled

Protocol:

Source IP address:

Destination IP address:

Source port range: Start End

Destination port range: Start End

3. One rule is created. And also, you can delete the existed rules.

Source address	Destination address	Protocol	Source port	Destination port	Enabled	Delete
All	All	TCP	21	21	<input checked="" type="checkbox"/>	<input type="checkbox"/>

1. Press Create IPv6 Rule button to add new rules.

IPv6 port filtering

This section allows you to configure the traffic policy for your internet service.

Inbound Outbound

[Create a new rule](#)

Source IPv6 address	Destination IPv6 address	Protocol	Source port	Destination port	Allow	Enabled	Delete
No filtering rule!							

2. Fill in needed information, and then press Apply button.

New IPv6 inbound filtering rule

This section allows you to configure the traffic policy for your internet service.
The rule is created with the function specified below.

Enabled Disabled

Traffic policy: Yes No

Protocol:

Source IP address:

IPv6 address:

Destination IP address:

IPv6 address:

Prefix length:

Source port range: Start End

Destination port range: Start End

3. One rule is created. And also, you can delete the existed rules.

Source IPv6 address	Destination IPv6 address	Protocol	Source port	Destination port	Allow	Enabled	Delete
3731:54:65fe:2::a8 / 128	2001:db8::21 / 64	UDP	23	23	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Choose the time period to activate IP and Port filtering

When would you like your IP and Port filtering to be active?

Always on
 I only want to restrict internet access at:
 The same time every day
 Different times on different days of the week

	Hours																								
	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	
Monday																									
Tuesday																									
Wednesday																									
Thursday																									
Friday																									
Saturday																									
Sunday																									

Blocked day and time
 [Clear All](#)
[Inverse](#)

tip Click on the tiles to block

Port Forwarding

This allows for incoming requests on specific port numbers to reach web servers, FTP servers, mail servers, etc. so they can be accessible from the public Internet.

1. Press Create a new rule button to add new Port Forwarding rules

This function allows for incoming requests on specific port numbers to reach web servers, FTP servers and mail servers, etc:

[Create a new rule](#)

Local		External			
IP address	Port range	Port range	Protocol	Enabled	Delete
No forwarding rule!					

2. Fill in needed information, and then press Apply button.

This function allows for incoming requests on specific port numbers to reach web servers, FTP servers and mail servers, etc:

Local IP: 192.168.0.3
 Local start port: 66
 Local end port: 66
 External start port: 77
 External end port: 77
 Protocol: TCP
 Enabled: On

3. One rule is created. And also, you can delete the existed rules.

Local		External			
IP address	Port range	Port range	Protocol	Enabled	Delete
192.168.0.3	66	77	TCP	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Port-Triggering

Port triggering function is a conditional port forwarding feature. When this device detects outbound traffic on a specific port (triggered ports), it will set up the port forwarding rules temporarily on the port ranges you specify to allow inbound traffic. This is supposed to increase the support for Internet gaming, video conferencing, and Internet telephony due to these applications require multiple connections.

1. Press Create rule button to create a new rule

The Port Triggering area allows you to enable dynamic port forwarding for certain services/applications. The CH7465LG monitors outgoing traffic on the ports specified in the Trigger Range. When it detects activity on these ports, it remembers the IP address of the device sending the data and routes incoming traffic on ports in the Target Range to that IP address on your network.

[Create a new rule](#)

Trigger range	Target range	Protocol	Enabled	Delete
No triggering rule!				

2. Fill in needed information and then press apply button.

The Port Triggering area allows you to enable dynamic port forwarding for certain services/applications. The CH7465LG monitors outgoing traffic on the ports specified in the Trigger Range. When it detects activity on these ports, it remembers the IP address of the device sending the data and routes incoming traffic on ports in the Target Range to that IP address on your network.

Trigger start port:

Trigger end port:

Target start port:

Target end port:

Protocol:

Enabled:

3. One Rule is created and also you can delete the existed rule.

Trigger range	Target range	Protocol	Enabled	Delete
77	66	UDP	<input checked="" type="checkbox"/>	<input type="checkbox"/>

DMZ

This page is for DMZ (Demilitarized Zone) configuration. You can fill in the exposed host and select enable button.

DMZ function

Enabled
 Disabled

DMZ address: 192.168.0.

DHCP

Connect Box provides DHCP server to manage IP addresses to CPEs and supports reserved IP Address for users' private and static clients.

This sections allows you to configure how the CH7465LG assigns IPv4 addresses. It is configured to be a DHCP (Dynamic Host Configuration Protocol) server by default. This provides the TCP/IP configuration for all connected devices.

Enabled
 Disabled

Starting local address: 192.168.0.

Number of CPEs:

Lease time: seconds

Configure IPv6 address

This section allows you to configure how the CH7465LG assigns IPv6 addresses.

Enabled
 Disabled

Auto configuration type:
 Stateful
 Stateless

Start address:

Number of addresses:

DHCPv6 valid lifetime: seconds

Router advertisement lifetime: seconds

Router advertisement interval: seconds

Displays the details of the device

Attached devices

	Device name	MAC address	IP address	Lease time	Connected to
<input type="checkbox"/>	T14602-4750	206A8A833785	192.168.0.10/24	00:00:31:68	Ethernet 1
<input type="checkbox"/>	T14602-4750	ED0816228F72	192.168.0.11/24	00:00:53:50	Wi-Fi 2-45 (PCS34DCFE)

Select the device to add rule

Add reserved rule

MAC address: (example: 01:23:45:67:89:AB)

IP address: 192.168.0.

Displays the device reserved list

Reserved list		
MAC address	IP address	Delete
20:6A:8A:83:27:85	192.168.0.10	<input type="checkbox"/>

UPnP

Select enable to enable the UPnP agent in the cable modem. If you are running an application that requires UPnP, check this box.

UPnP function
<input checked="" type="radio"/> Enabled <input type="radio"/> Disabled

Tools

Tools
> Network status
> Ping
> Traceroute
> MTU size

Status

The Cable modem status page is a read-only screen that shows your cable modem upstream and downstream channel status.

Status	Downstream	Upstream	Configuration	Network Log
Refresh data				
Cable Modem Status				
Item	Status	Comments		
Acquired Downstream Channel(Hz)	418000000	Locked		
Ranged Upstream Channel(Hz)	446000000	Ranged		
Provisioning State	Online	Operational		

Downstream

The Downstream bonded channels page is a read-only screen that shows your cable modem downstream bonded channel status

Status	Downstream	Upstream	Configuration	Network Log	
Refresh data					
Downstream bonded channels					
Channel	Frequency (Hz)	Power (dBmV)	SNR (dB)	Modulation	Channel ID
1	418000000	-5	40	256qam	51
2	426000000	-6	40	256qam	52
3	434000000	-6	40	256qam	53

Upstream

The Upstream bonded channels page is a read-only screen that shows your cable modem upstream bonded channel status

Channel	Frequency (Hz)	Power (dBmV)	Symbol Rate (ksps)	Modulation	Channel ID
1	44600000	47	1280	64qam	1
2	57200000	47	1280	64qam	4
3	54000000	47	1280	64qam	3

Channel	Channel Type	T1 Timeouts	T2 Timeouts	T3 Timeouts	T4 Timeouts
1	2.0	0	0	0	0
2	2.0	0	0	0	0
3	2.0	0	0	0	0


Configuration

The configuration page is a read-only screen that shows your cable modem General configuration status, Primary Downstream Service Flow & Primary Upstream Service Flow.

Section	Setting	Value
General Configuration	Network access	Allowed
	Maximum Number of CPEs	3
	Baseline Privacy	Enabled
	DOCSIS Mode	DOCSIS 3.0
	Config file	Yyu_clone_Eurobasic3D_CBN.cfp
Primary Downstream Service Flow	SFID	4B
	Max Traffic Rate	0 kbps
	Max Traffic Burst	3044 bytes
	Min Traffic Rate	0 kbps
Primary Upstream Service Flow	SFID	47
	Max Traffic Rate	0 kbps
	Max Traffic Burst	3044 bytes
	Min Traffic Rate	10000 kbps
	Max Concatenated Burst	3044 bytes
	Scheduling Type	Best Effort

Network Log

Connect Box allows users to review critical system events in chronological order in the SNMP event log.

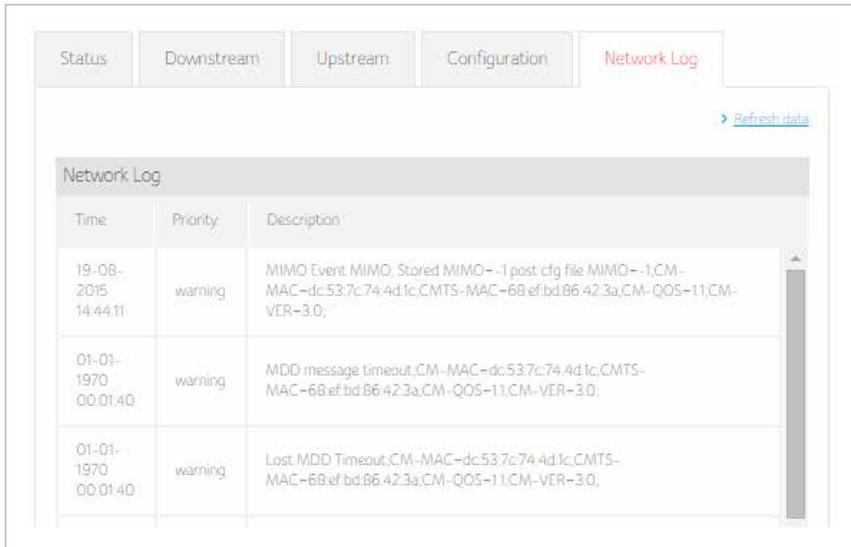


Time	Priority	Description
19-08-2015 14:44:11	warning	MIMO Event MIMO Stored MIMO--1 post cfg file MIMO--1,CM-MAC-dc.53.7c.74.4d.1c,CMTS-MAC-68.ef.bd.86.42.3a,CM-QOS=11,CM-VER=3.0;
01-01-1970 00:01:40	warning	MDD message timeout,CM-MAC-dc.53.7c.74.4d.1c,CMTS-MAC-68.ef.bd.86.42.3a,CM-QOS=11,CM-VER=3.0;
01-01-1970 00:01:40	warning	Lost MDD Timeout,CM-MAC-dc.53.7c.74.4d.1c,CMTS-MAC-68.ef.bd.86.42.3a,CM-QOS=11,CM-VER=3.0;

Ping

The Connect Box Diagnostics page allows you to troubleshoot connectivity problems. Two utilities are provided for troubleshooting network connectivity: Ping and Traceroute.

Ping allows you to check connectivity between the cable modem and devices on the LAN.

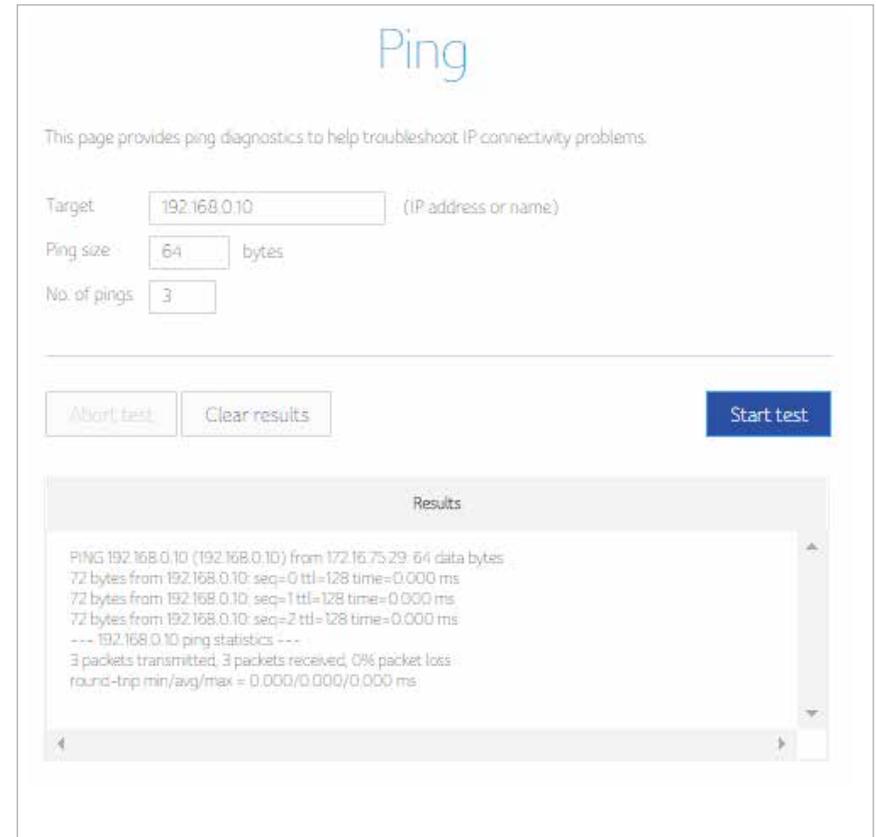

Ping

This page provides ping diagnostics to help troubleshoot IP connectivity problems.

Target: (IP address or name)

Ping size: bytes

No. of pings:

Results

```

PING 192.168.0.10 (192.168.0.10) from 172.16.75.29: 64 data bytes
72 bytes from 192.168.0.10: seq=0 ttl=128 time=0.000 ms
72 bytes from 192.168.0.10: seq=1 ttl=128 time=0.000 ms
72 bytes from 192.168.0.10: seq=2 ttl=128 time=0.000 ms
--- 192.168.0.10 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max = 0.000/0.000/0.000 ms
  
```

Traceroute

Traceroute allows you to map the network path from the cable modem to a public host.

Traceroute

This page provides traceroute function to help troubleshoot IP connectivity problems.

Target: (IP address or name)

Max hops: (1 - 255)

Base port: (0 - 65535)

Results

```

6 60.199.5.29 10.000 ms 10.000 ms 30.000 ms
7 60.199.16.98 20.000 ms 60.199.23.26 20.000 ms 20.000 ms
8 * 72.14.212.145 20.000 ms 20.000 ms
9 72.14.233.20 20.000 ms 209.85.243.30 30.000 ms 72.14.233.20 20.000 ms
10 216.239.46.223 20.000 ms 209.85.252.161 20.000 ms 10.000 ms
11 209.85.246.218 10.000 ms 20.000 ms 20.000 ms
12 ***
13 74.125.203.104 20.000 ms 20.000 ms 20.000 ms
[trace_route finish ]
          
```

MTU Size


MTU (Maximum Transfer Unit) specifies maximum transmission unit size.

Gateway MTU size (1000 - 1500)

Set the Connect Box MTU, in bytes. The minimum is 68 bytes. The default is 1500 bytes.

8 Admin

This section describes the settings for administering and maintaining your Wi-Fi modem router and home network.

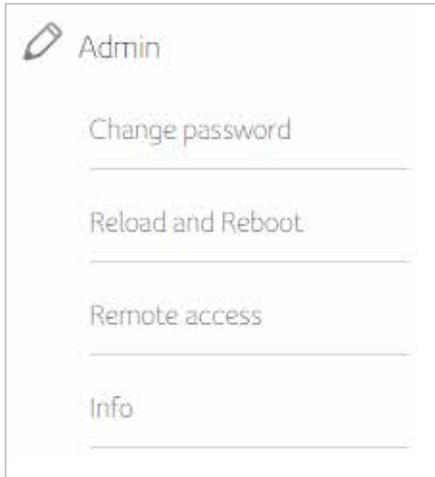

Change password

This feature allows you to change the default password that is used to log in to the Wi-Fi modem router.


Configure Password and then click Apply and when you login in next time, you must use this new password. For secure reasons, we strongly suggest to change default password as soon as possible.

 A screenshot of the 'Change password' form. The title 'Change password' is at the top in a large blue font. Below it is a subtitle: 'Change the password of the admin account used for signing into the settings pages'. There are two input fields: 'Current password' with the value '37539870' and 'Password' with the value '12345'. A small information icon is to the right of the 'Password' field.

Reload and Reboot

The configuration settings of the Wi-Fi DSL Modem Router are stored within the Wi-Fi modem router in a configuration file. You can back up (save) this file to your computer, restore it, or reset it to the factory default settings.

Click Backup to save a copy of the current settings, choose a location to store the .cfg file on your computer.

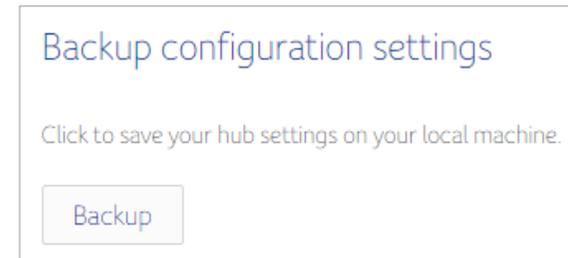

Enter the full path to the the file backup file on your network, or click select file to find the file. After locating the .cfg file click reload button to upload the file to the Wi-Fi modem Router.

 A screenshot of the 'Reload configuration settings' dialog. The title is 'Reload configuration settings'. Below the title is the text: 'Restore your saved Hub settings from a backup stored on your local machine.' There is an input field labeled 'Configuration file'. Below the input field are two buttons: 'Select file' and 'Reload'.

Click Restore default button to return to your Connect Box to its factory default settings.

Restore factory defaults

Restoring to factory default will mean any changes you have made to the settings of your CH7465LG will be lost.

Restore default

Click Reboot button to restart you Connect Box Wi-Fi Modem Router

Restart

Clicking on the 'Reboot' button will restart your CH7465LG immediately. This can take up to 5 minutes to complete.

Reboot

Remote Access

The remote management feature lets you upgrade or check the status of your Wi-Fi DSL Modem Router over the Internet.

Remote access

Enabling remote access allows your CH7465LG settings to be accessed from a device located outside of your home network. We recommend that you disable remote access when not required, as leaving it enabled could introduce an unnecessary security risk to your network.

✔ Enabled Disabled

Port: 8080

Info

The info page is a read-only screen that shows your cable modem device information and WAN IP settings.

Standard specification compliant	DOCSIS 3.0
Hardware version	4.01
Software version	CH7465LG-NCIP-4.50.18.8c-5H
Cable MAC address	DC:53:7C:74:4D:1C
Cable modem serial number	DDAP51540096
System up time	Oday(s)1h48m43s
Network access	Allowed

MAC address	DC:53:7C:74:4D:1E
IPv6 address	fe80:de537c744d1e64 2002:db50fa13701c13fa79dc98d7d128
IPv6 default gateway	fe80:23058ffed475a0
IPv6 lease time	D0 H3 M0 S0
IPv6 lease expires	Mon Aug 17 05:44:26 2015
IPv6 DNS servers	2002:db50fa131:2
IPv4 address	172.16.75.29
Default gateway	172.16.75.1
IPv4 lease time	D0 H23 M28 S30
IPv4 lease expires	Tue Aug 18 13:12:51 2015
IPv4 DNS servers	172.16.12

9 Troubleshooting

If the solutions listed here do not solve your problem, contact your service provider.

Before calling your service provider, try pressing the Reset button on the rear panel of the Connect Box. Please note, if you press the Reset button, you will lose all your custom configuration settings, including Firewall and Advanced settings. Your service provider may ask for the front panel LED status; see Front-Panel LEDs and Error Conditions.

Solutions

Problem	Possible Solution
None of the LEDs Turn On	<p>The Connect Box is not receiving power, or there is a fault with the device.</p> <ul style="list-style-type: none"> • Ensure that you are using the correct power adaptor • Using a power adaptor other than the one that came with your Connect Box can damage the Connect Box. • Ensure that the power adaptor is connected to the Connect Box and the wall socket (or other power source) correctly. • Ensure that the power source is functioning correctly. Replace any broken fuses or reset any tripped circuit breakers. • Disconnect and re-connect the power adaptor to the power source and the Connect Box. • If none of the above steps solve the problem, consult your vendor.

Problem	Possible Solution
Cannot send or receive data	<p>If you have cable TV, check that the TV is working and the picture is clear. If you cannot receive regular TV channels, the data service will not function.</p> <ul style="list-style-type: none"> • Check the coaxial cable at the Connect Box and wall outlet. Hand-tighten, if necessary. • Check the IP address. • Check that the Ethernet cable is properly connected to the Connect Box and the computer. • If a device is connected via the Ethernet port, verify connectivity by checking the LINK LEDs on the rear panel.

Problem	Possible Solution
Wireless client(s) cannot send or receive data	<p data-bbox="568 240 976 363">Perform the first four checks in «Cannot send or receive data.»Check the Security Mode setting on the Wireless Security Page:</p> <ul data-bbox="568 400 976 911" style="list-style-type: none"> <li data-bbox="568 400 976 587">• If you enabled WPA and configured a passphrase on the Connect Box, be sure each affected wireless client has the identical passphrase. If this does not solve the problem, check whether the wireless client supports WPA. <li data-bbox="568 592 976 810">• If you enabled WEP and configured a key on the Connect Box, be sure each affected wireless client has the identical WEP key. If this does not solve the problem, check whether the client's wireless adapter supports the type of WEP key configured on the Connect Box. <li data-bbox="568 815 976 911">• To temporarily eliminate the Security Mode as a potential issue, disable security. <p data-bbox="568 948 976 1007">After resolving your problem, be sure to re-enable wireless security.</p> <ul data-bbox="568 1043 976 1161" style="list-style-type: none"> <li data-bbox="568 1043 976 1161">• On the Wireless Access Control Page, be sure the MAC address for each affected wireless client is correctly listed.

Problem	Possible Solution
Slow wireless transmission speed with WPA enabled	On the Wireless Primary Network Page, check whether the WPA Encryption type is TKIP. If all of your wireless clients support AES, change the WPA Encryption to AES.