



# BT Router (BT2700HGV) Setup Guide

## Setup Guide

Open up internet explorer and enter 192.168.1.254 in the address bar from the page that appears click **“Settings”** then **“Firewall”** then lastly **“Allow pinholes and DMZ mode”**

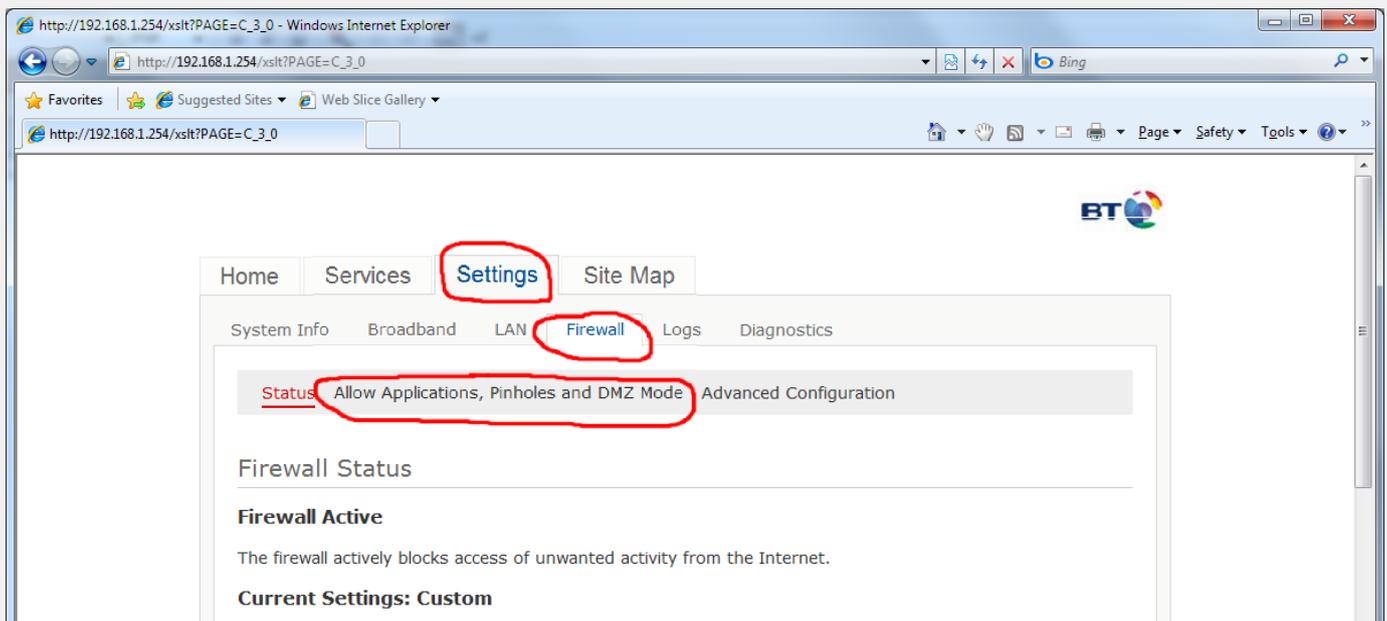

On the next screen scroll down to the 2 blue links at the bottom of the page and select **“Add new user-defined application”**

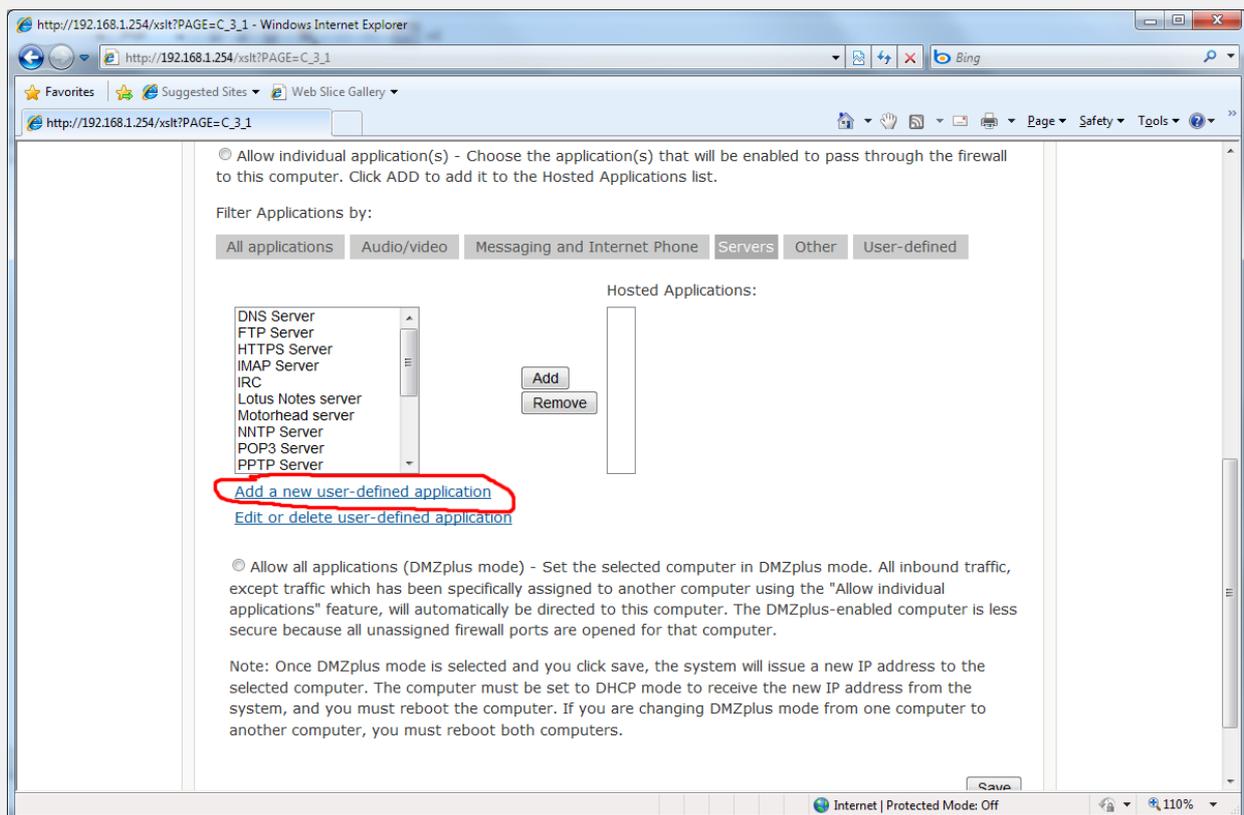


**Setup Guide Part 2**

Create a new user defined application by first giving it a name in the **“Application profile name”** box in this instance call it **“DVR”**

the only other field we need to fill in is what port we want to forward, in the case of the EZH DVR the default port is 80 so pop **80** in both the **“From”** and **“To”** fields in the cas of other DVRs check the documentation for the required ports to forward

NB\* some DVRs require more than one port in this case repeat the process to add additional ports

NB\* some DVRs require a range of ports in this case add the first port in the **“From”** field then the end port in the **“To”** field.

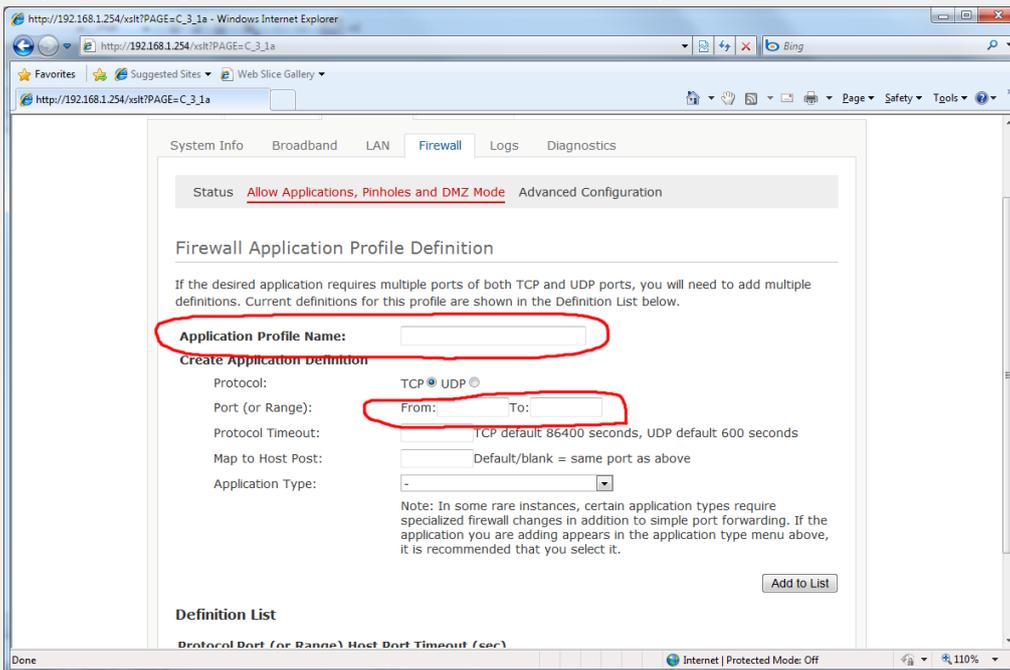

Lastly back on the **“Allow pinholes and DMZ mode”** page manually enter the internal IP address of your DVR in the **“Enter IP address”** field then click **Choose** then click the gray **“User-Defined”** filter button this will display your newly created application simply click on the application in the left box the click the **Add** button, the application will now appear in the right box simply scroll to the bottom of the page and click **Save** to finish

