


PROLINK®

Challenge The Limit

Hurricane 8600 ADSL USB Modem

Use Hurricane 8600 ADSL USB Modem to surf the Internet at speeds 30 times faster than a 56K modem. It is also a full rate controllerless-based ADSL Modem. It uses Alcatel solution that fully complies to T1.413, G.Lite, G.DMT ADSL standard. In addition, it supports Full-Rate ADSL transmission at up to 8Mbps downstream and up to 832Kbps upstream.

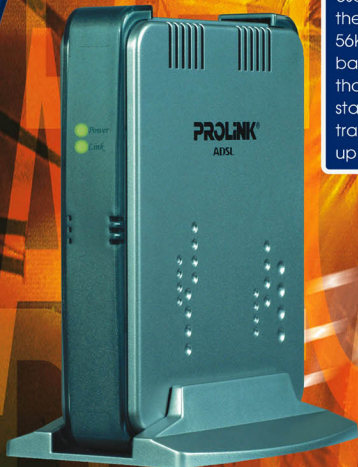

2 RJ-11 ports
for Line / Telephone



USB Interface



- Supports USB Bus Powered Operation for Full Rate DMT
- Visual LED Indicates Network Status
- Plug & Play
- Supports Splitterless Consumer Installable DSL (CIDSLS™)
- Data Rate Up to 8Mbps Downstream
- Data Rate Up to 832Kbps Upstream
- Supports for PPP over ATM, Ethernet over ATM
- Complete USB 1.1 Compliant Reference Design
- Interoperate with Other ADSL Chipset

PROLINK®

Challenge The Limit

Hurricane 8600

ADSL USB Modem



Features & Benefits

- Supports Universal Serial Bus Specification Revision 1.1
- USB Bus-Powered; an external power supply is not required
- Supports 3 device drivers: Microsoft NDIS 4.0, WAN Miniport NDIS 4.0, LAN Miniport or NDIS 5.0 ATM Miniport
- Compatible with all T1,413,G.DMT,and G.Lite compliant CP DSLAM equipment as well as the vast majority of deployed CAP
- RADSLS CO equipment
- Software Upgradeable
- Supports up to 16 simultaneous ATM virtual connections
- Includes a Microsoft Windows control panel monitoring program for configuring the adapter and checking the status of the connection
- Supports for PPP over ATM and Ethernet over ATM
- Plug & Play compatibility
- Visual LED indicates network status

Specifications

- **Status LED:**
Indicating Power LED and Link Connectivity LED
- **ADSL Software Support:**
RFC2364 PPP over ATM
RFC1483 Bridged Ethernet over ATM
RFC1483 Routed IP over ATM
RFC2516 PPP over Ethernet
UNI 3.0,3.1 and UNI 4.0 ATM signaling
NDIS 4.0 WAN Miniport
NDIS 4.0 LAN Miniport
NDIS 5.0 ATM Miniport
- **ADSL Driver Support:**
Windows 98SE/2000/XP/ME
- **Systems Requirements:**
Pentium II 233 or higher IBM compatible PC
Microsoft Windows 98SE/2000/XP/ME
64MB of RAM
20MB of free hard disk space
Available USB port
CD-ROM drive for drivers and software installation
ADSL service subscribed with a ADSL Service Provider

**Specifications are subjected to change without prior notice*

Singapore

FIDA INTERNATIONAL (S) PTE LTD

Blk 105 Boon Keng Road #06-11/13

Kallang Basin Industrial Estate

Singapore 339776

Tel: (65) 6392 5567 Fax: (65) 6392 5455

Website: www.fida.com

Malaysia

FIDA SYSTEMS (M) SDN BHD

29 USJ 1/31

47600 Subang Jaya Selangor

Darul Ehsan Malaysia

Tel: (603) 8024 9151 Fax: (603) 8024 9161

Website: www.fida.com

Online Technical Support
support@fida.com

<http://www.fida.com>

PROLINK is manufactured under the authority of FIDA INTERNATIONAL (S) PTE LTD



Free Lifetime Technical Support Hotline

9am - 5.45pm (MON-FRI)

9am - 1pm (SAT)

Closed on Sundays & Public Holidays

Tel: (65) 6296 5455 (SINGAPORE)

(603) 8024 9151 (MALAYSIA)

All brand or product names are trademark or registered trademarks of their respective owners
©Copyright 2004 PROLINK All Rights Reserved